


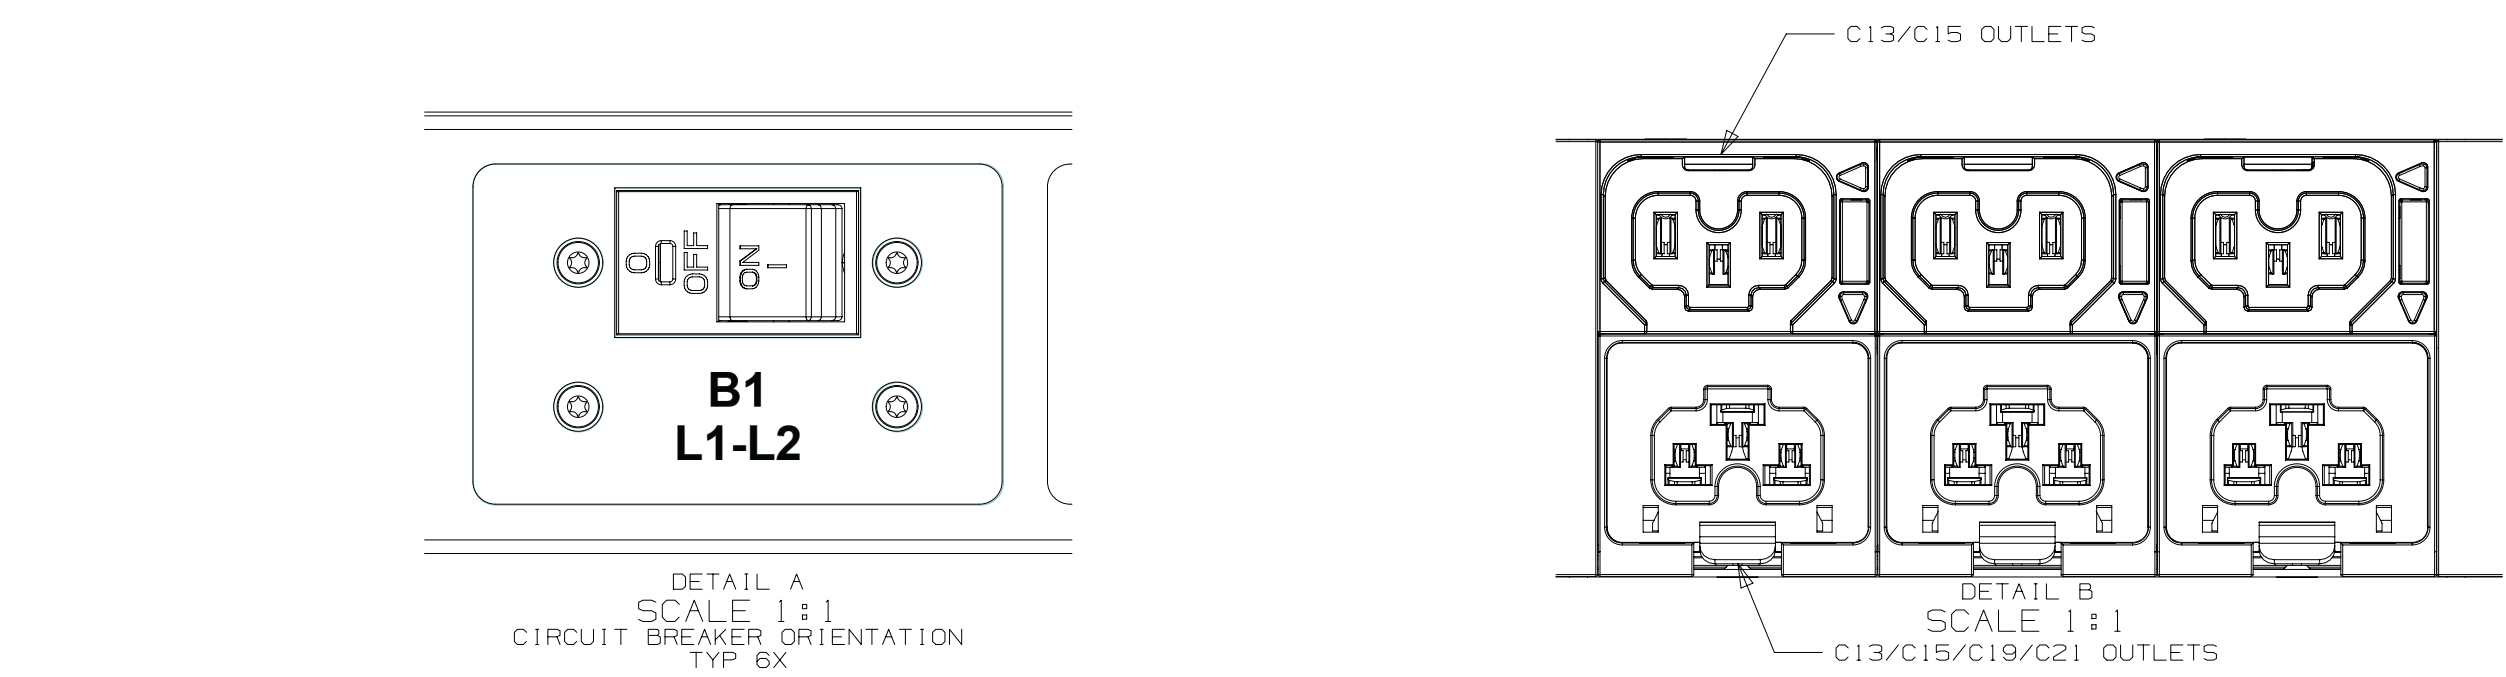
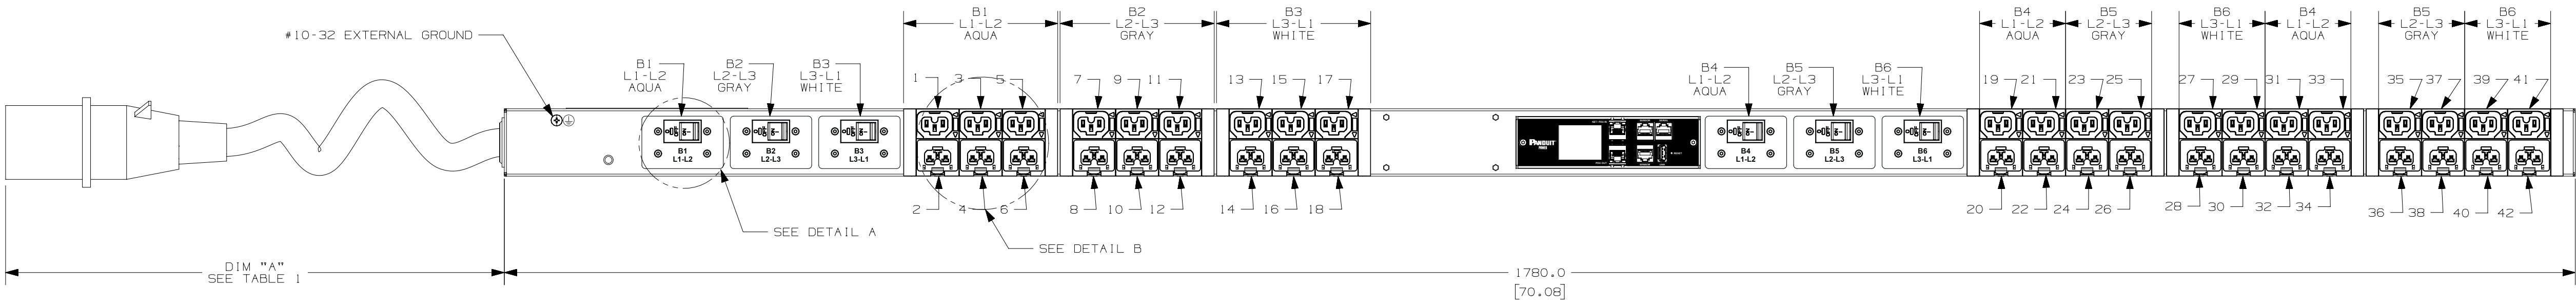
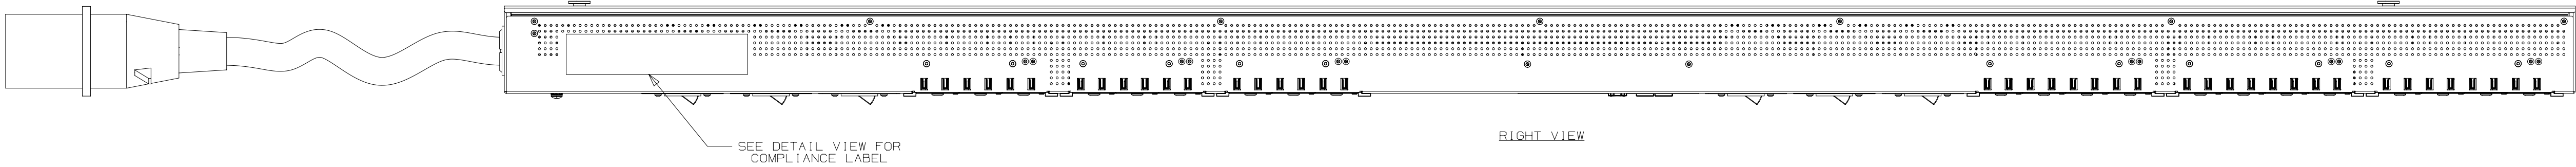


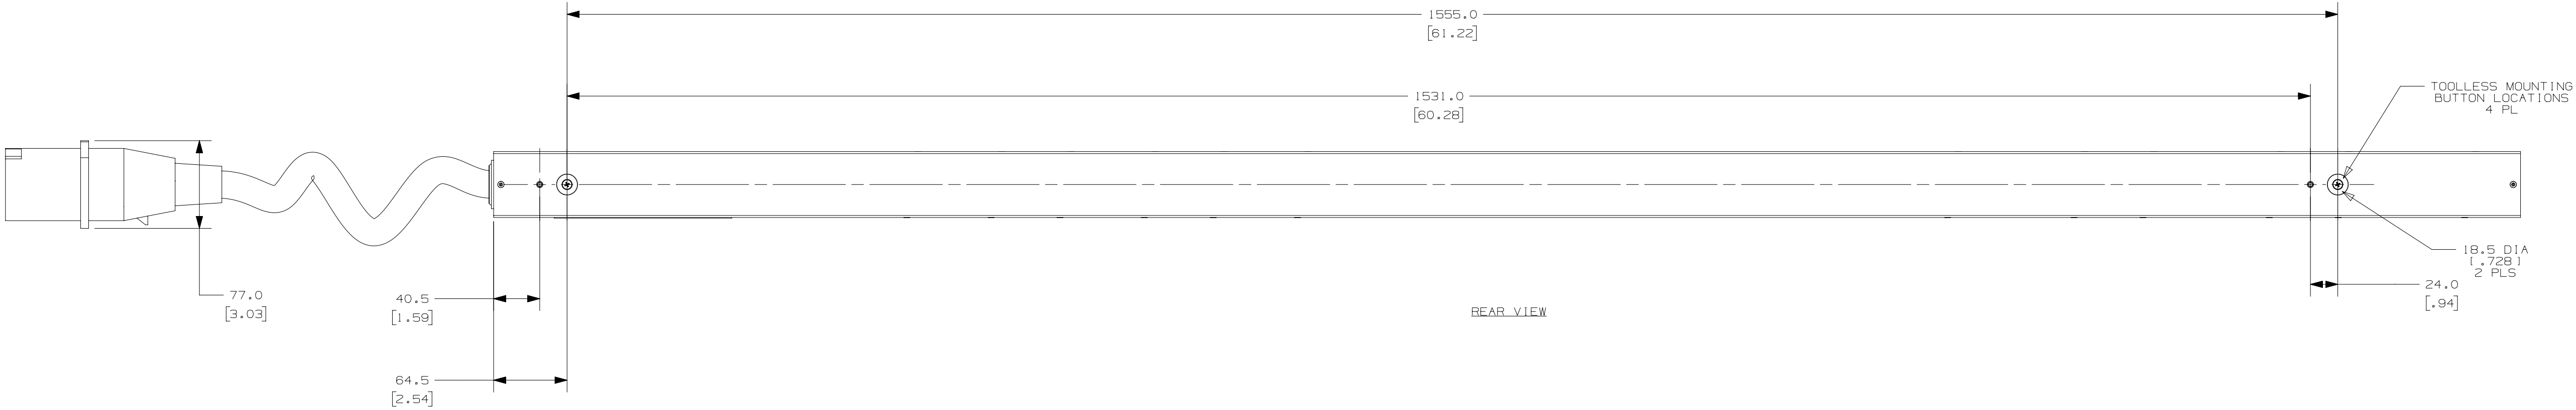

INPUT_PLUG_FRONT_VIEW

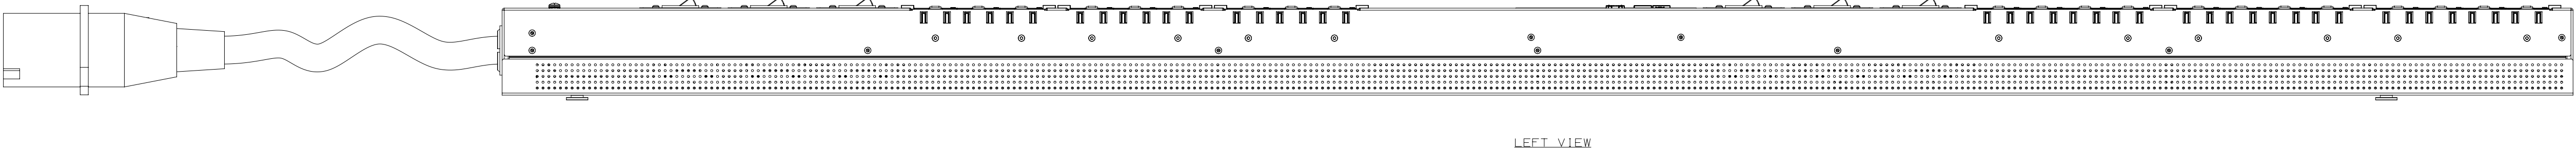

COMPLIANCE LABEL VIEW




SPECIFICATION

- STANDARD:
 - UNIT TYPE: MS
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (21)C13/C15, (21)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLE-POLE
 - INPUT PHASE: THREE-PHASE DELTA, L-L
 - RATED POWER: 17.3 KVA
 - INPUT PLUG: IEC 60309 3P+E 9h 60A (1P44)
- ADDITIONAL:
 - CORD TYPE: 4W 6AWG 500W
- ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN INCHES.
- HEXAGONS ARE USED FOR COMMUNICATION PURPOSES, CIRCLES ARE USED FOR CRITICAL DIMENSIONS, TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS, SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.

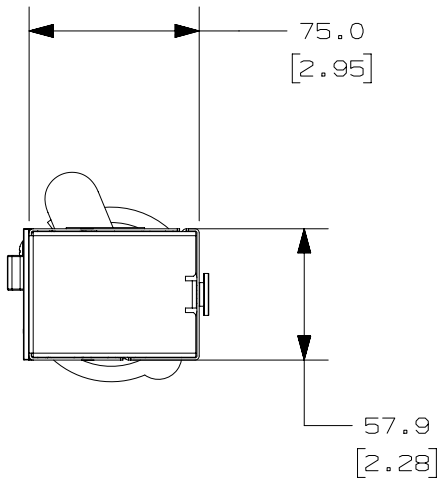

BOTTOM VIEW

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42E24L	EL2P MS PDU, 60 AMP, (21)C13/C15, (21)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (1P44)	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	15.8

TITLE					E42E24L				
CUSTOMER DRAWING					E42E24L-DC				
ITEM REVISION NAME					E42E24L-05				
DATASET FILE NAME					E42E24L-DC/05A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± .01 IN (1 IN 1)					NOT APPLICABLE				
THIRD ANGLE PROJECTION					E42E24L-DC				
DATE	BY	CHK	APR	DESCRIPTION	ECN	DATE	BY	CHK	APR
05A	04/02/2025	GLM	MIM	ADDED COMPLIANCE LABEL. ADDED CORD TYPE. ADDED WEIGHT	E42E24L	01/25/2024	GLM	MIM	3:10
04A	01/29/2025	GLM	MIM	RELEASE FOR PRODUCTION	E42E24L				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN			