


SPECIFICATION


- STANDARD:
 - UNIT TYPE: MSPO
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (21)C13/C15, (21)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLE-POLE
 - INPUT PHASE: THREE-PHASE DELTA, L-L
 - RATED POWER: 17.3 KVA
 - INPUT PLUG: IEC 60309 3P+E 9h 60A (1P44)
- ADDITIONAL:
 - CORD TYPE: 4W 6AWG 500W
- ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

NOTES


- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN INCHES
- HEXAGONS ARE USED FOR COMMUNICATION PURPOSES, CIRCLES ARE USED FOR CRITICAL DIMENSIONS, TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS, SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.

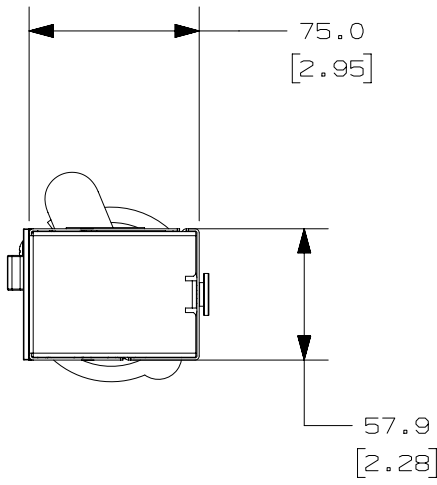

BOTTOM VIEW

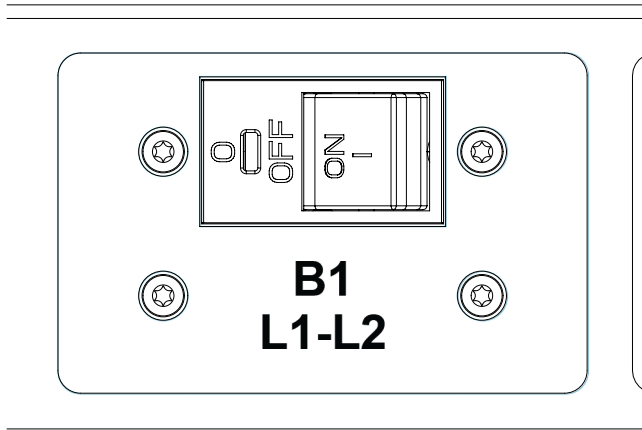

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 6X

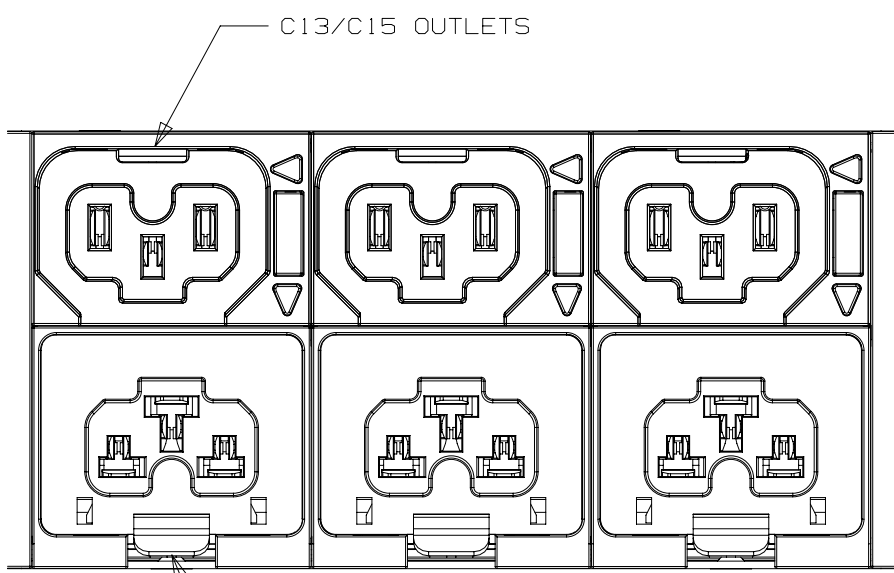


DETAIL B
SCALE 1:1
C13/C15/C19/C21 OUTLETS

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42G20L	EL2P MSPO PDU, 60 AMP, (21)C13/C15, (21)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (1P44)	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	15.8

INPUT_PLUG_FRONT_VIEW



COMPLIANCE_LABEL_VIEW

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com
SKU #: E42G20L
Model #: E2W048B0
INPUT: 200-240VAC, 3Ø, 50/60Hz, 48A
OUTPUT: C13; 200-240VAC, 10A per outlet
C19; 200-240VAC, 16A per outlet
48A Total

Power Distribution Unit

NOM **NYCE** **FC**

N **US** **50** **150**

62368-1
CAN ICES-003(A)/NMB-003(A)

Made in China

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	04/07/2025	GLM	MM JOHL	MJD RROD	ADDED WEIGHT, ADDED COMPLIANCE LABEL	E42G20L
02A	01/31/2025	GLM	MM JOHL	MJD RROD	RELEASE FOR PRODUCTION	E42G20L
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE	E42G20L
CUSTOMER DRAWING	E42G20L/03
DATASET FILE NAME	E42G20L-DC/03A
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± .001 IN (1)	MATERIAL
NOT APPLICABLE	NOT APPLICABLE
THIRD ANGLE PROJECTION	THIRD ANGLE PROJECTION
SCALE	SCALE
3:10	3:10
SHT 1 OF 1	SHT 1 OF 1