








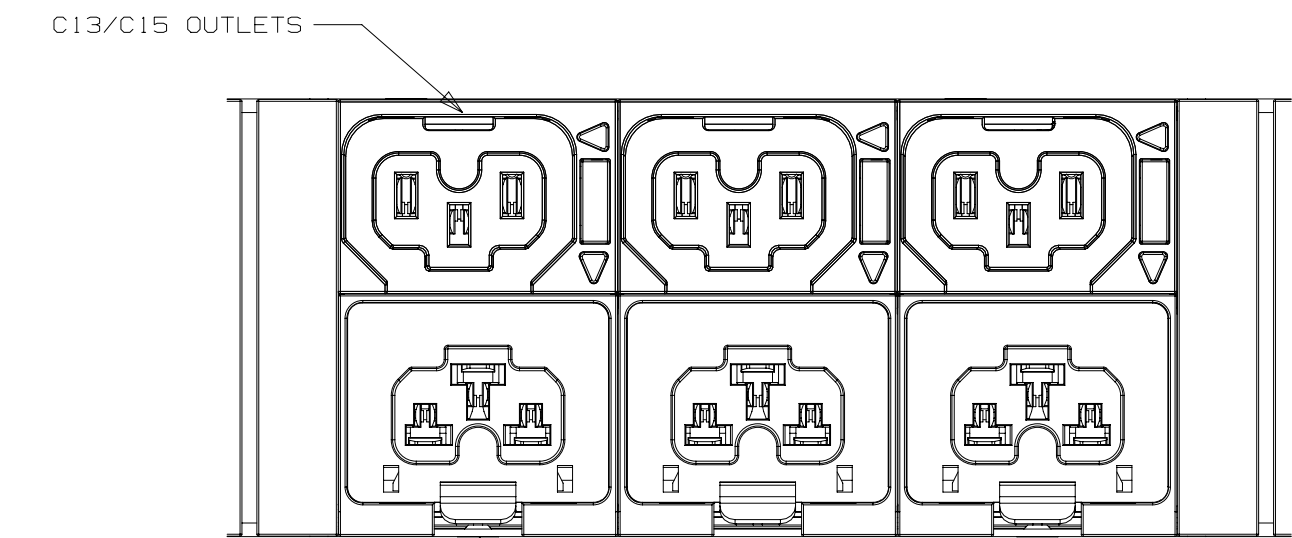


TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E42G22L	EL2P MSPO PDU, 50 AMP, (21)C13/C15, (21)C13/C15/C19/C21, C58365	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	15.8

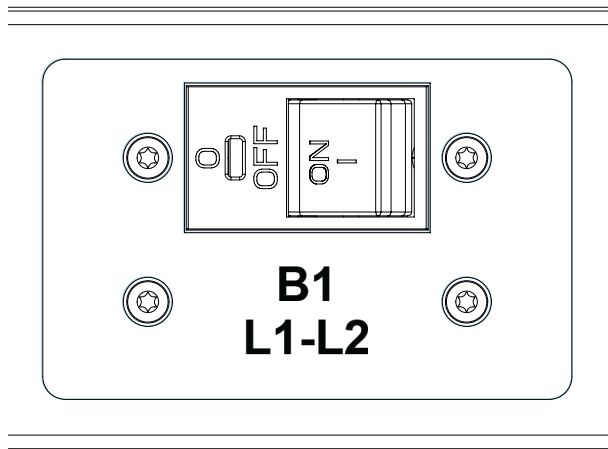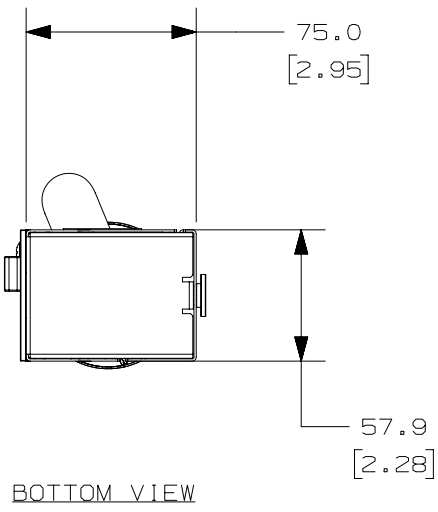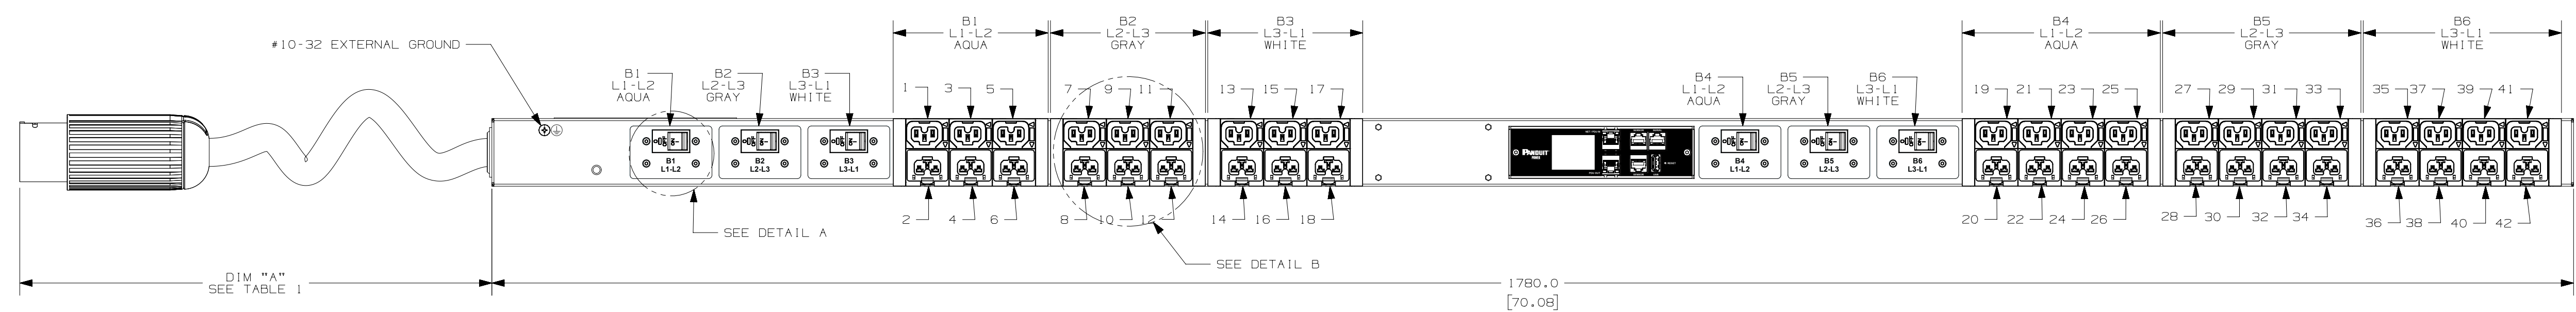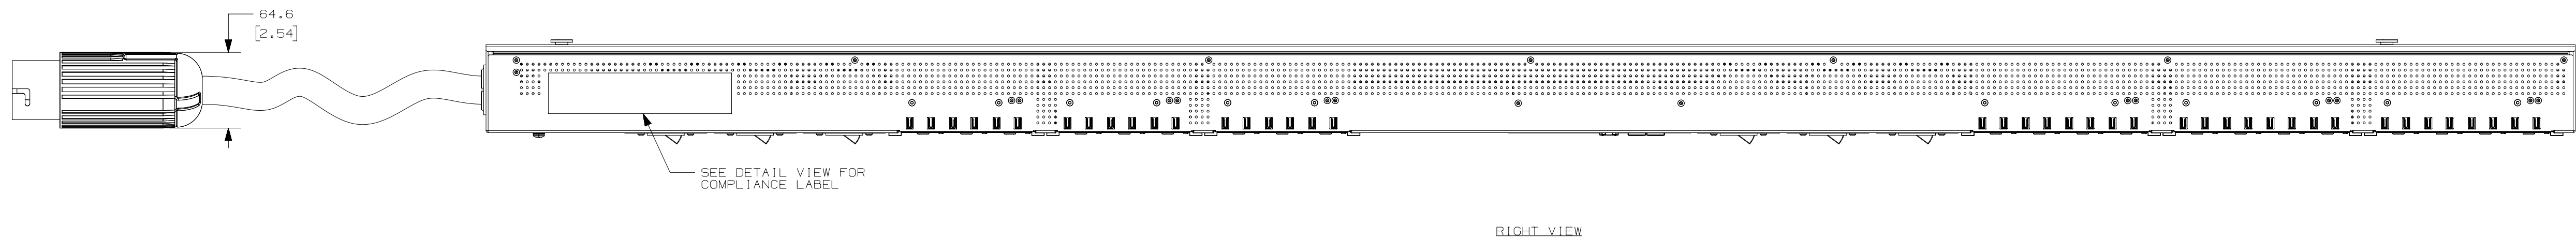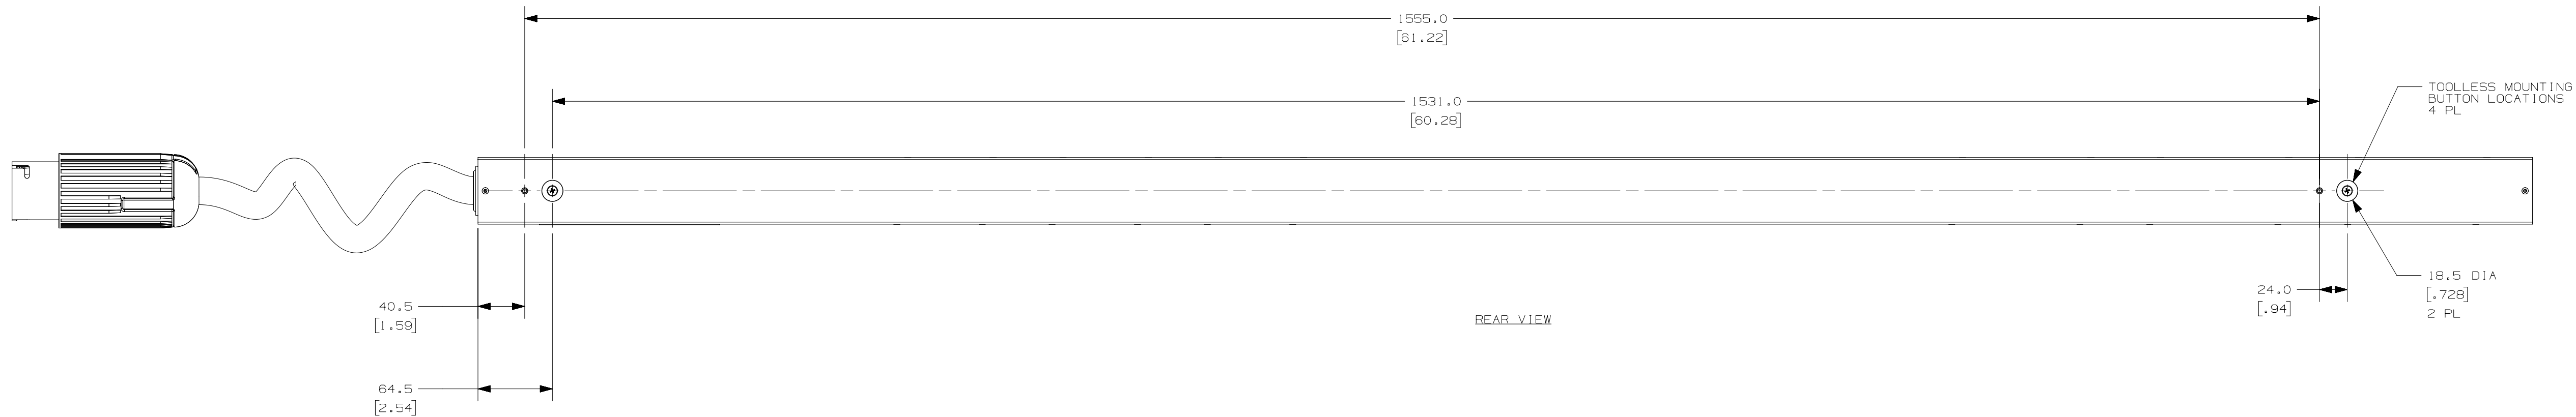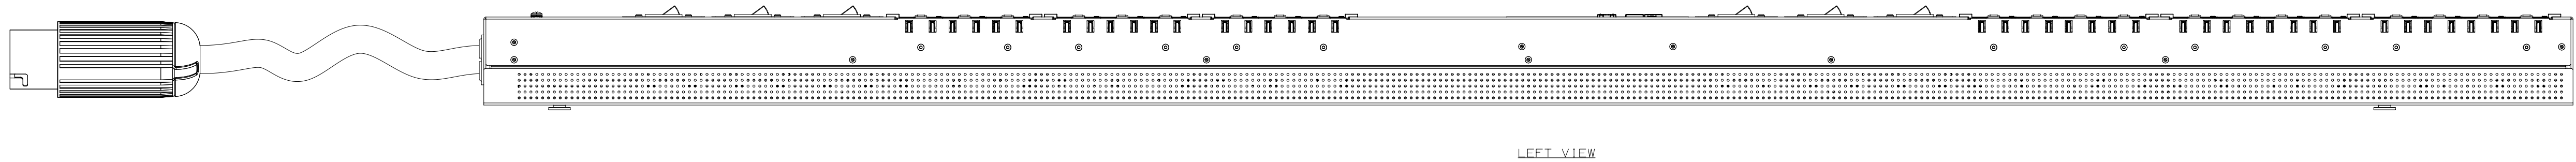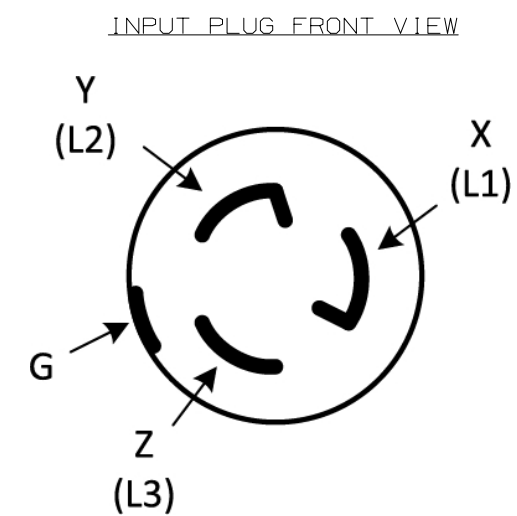

SPECIFICATION

- STANDARD:
 - UNIT TYPE: MSPO
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (21)C13/C15, (21)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 50A (40A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLE-POLE
 - INPUT PHASE: THREE-PHASE DELTA, L-L
 - RATED POWER: 14.4 KVA
 - INPUT PLUG: C58365, 3P 4W, 50A(40A DERATED)
- ADDITIONAL:
 - CORD TYPE: 4W 6AWG 500W
- ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TITLE						CUSTOMER DRAWING					
E42G22L						E42G22L-DC					
ITEM REVISION NAME						E42G22L/02					
DATASET FILE NAME						E42G22L-DC/02A					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± .01 IN (1 IN 1)						MATERIAL					
THIRD ANGLE PROJECTION						NOT APPLICABLE					
DRAWING NUMBER						E42G22L-DC					
SHEET 1 OF 2						SHT 1 OF 2					