

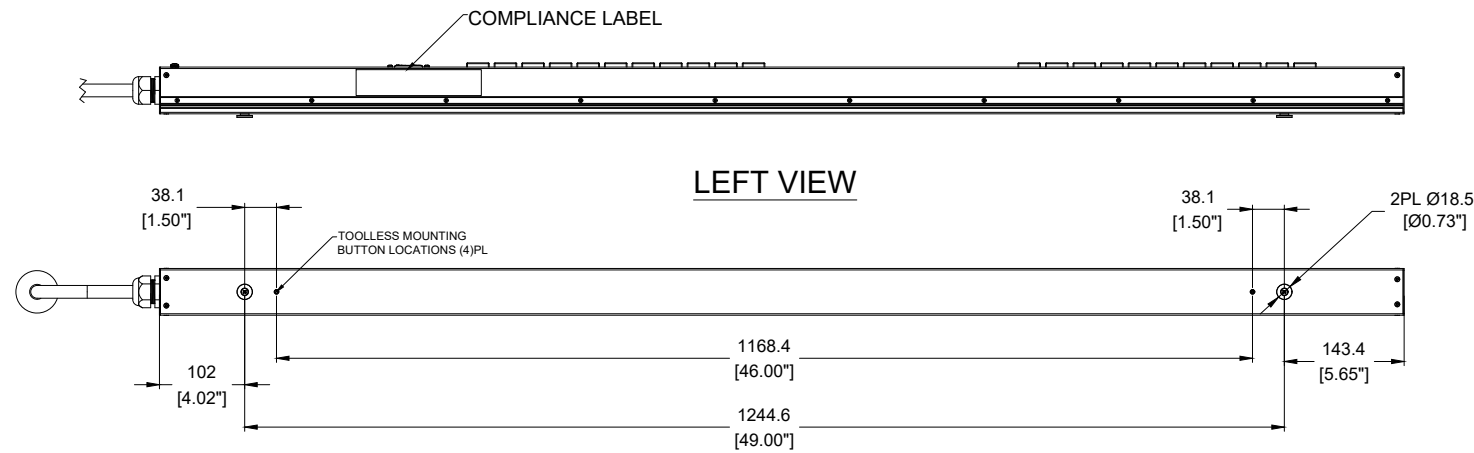



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

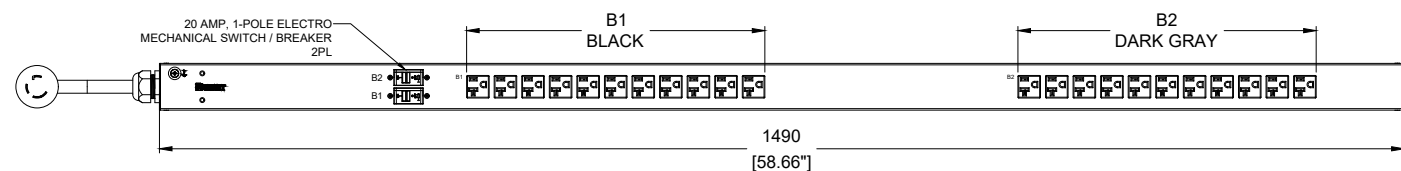

REAR VIEW

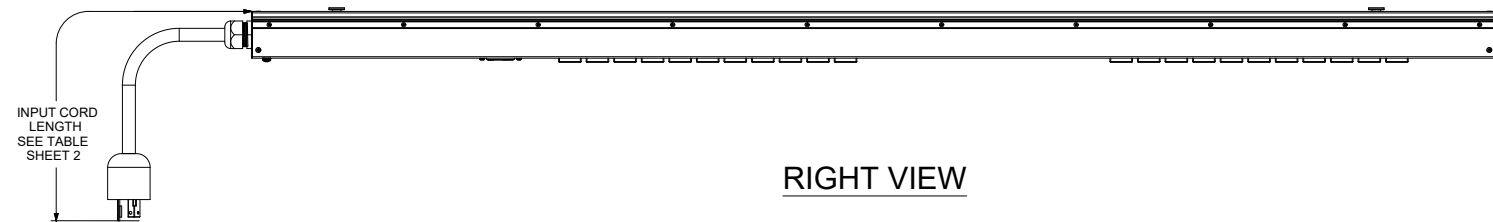

SPECIFICATION:


- STANDARD
UNIT TYPE: BASIC
ORIENTATION: VERTICAL, 0U MID
OUTLET QTY & TYPE: (22)5-20R
INPUT VOLTAGE: 100-120VAC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (2)20AMP, SINGLE-POLE
INPUT PHASE: SINGLE-PHASE,L-N
RATED POWER: 2.9 kVA
INPUT PLUG: NEMA L5-30P 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
- ADDITIONAL:
NONE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: E22B09M-XXYZ

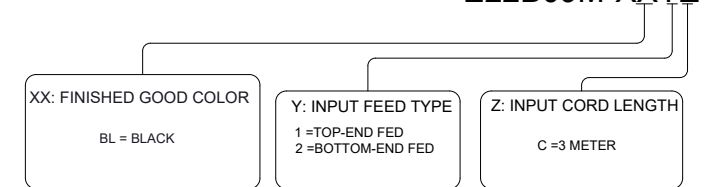

PLUG / RECEPTACLE BLOCK




PLUG
NEMA L5-30P 3W
30A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
16A, 125V MAX RATED OUTPUT

01A	06/01/2026	Mucl	MIM	MJD	UPDATE COMPLIANCE LABEL	E22B09M
00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E22B09M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E22B09M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E22B09M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER: E22B09M_DA			
DRAWN BY		DATE		CHK		SCALE	
Mucl		06/01/2026		MIM		NONE	
SHT 1 OF 3						SCALE B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E22B09M	ES2P BASIC PDU, 30A(24A DERATED) (22)5-20R, NEMA L5-30P 3W-3M, TOP-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

01A	06/01/2026	Mucl	MIM	MJD	UPDATE COMPLIANCE LABEL	E22B09M
00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E22B09M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E22B09M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E22B09M CONTROL DRAWING							
ITEM REVISION NAME:				PANDUIT			
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:			
THIRD ANGLE PROJECTION				N/A			
				DRAWING NUMBER:			
				E22B09M_DA			
				SHT 2 OF 3			
				SCALE			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 3		SCALE	
Mucl	06/01/2026	MIM	NONE			B	

