

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

1. STANDARD:


UNIT TYPE:	MONITORED INPUT
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(28) C13, (6) C19
INPUT VOLTAGE:	200-240VAC
INPUT CURRENT:	32A
BREAKER QTY&TYPE:	(2) 16AMP, SINGLE-POLE
INPUT PHASE:	SINGLE-PHASE
RATED POWER:	7.4kVA
INPUT PLUG:	IEC 60309 2P+E 6H 32A
INPUT POWER CORD:	SEE SHEET 2 FOR PART NUMBER TABLE
REGULATORY STANDARD:	RoHS COMPLIANT
2. ADDITIONAL:

THE G6 CONTROLLER IS NOT BACKWARDS COMPATIBLE
WITH ANY LEGACY CONTROLLERS
3. ACCESSORIES:

DOCUMENTATION KIT
PRODUCT SAFETY WARNING SHEET





1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: P34D41G-XX Y Z



XX: FINISHED GOOD COLOR BL=BLACK YL=YELLOW RD=RED BU=BLUE WH=WHITE GN=GREEN	Y: INPUT FEED TYPE 1=TOP-END FED 2=BOTTOM-END FED	Z: INPUT CORD LENGTH A=1 METER B=2 METER C=3 METER
--	--	--

BOTTOM VIEW

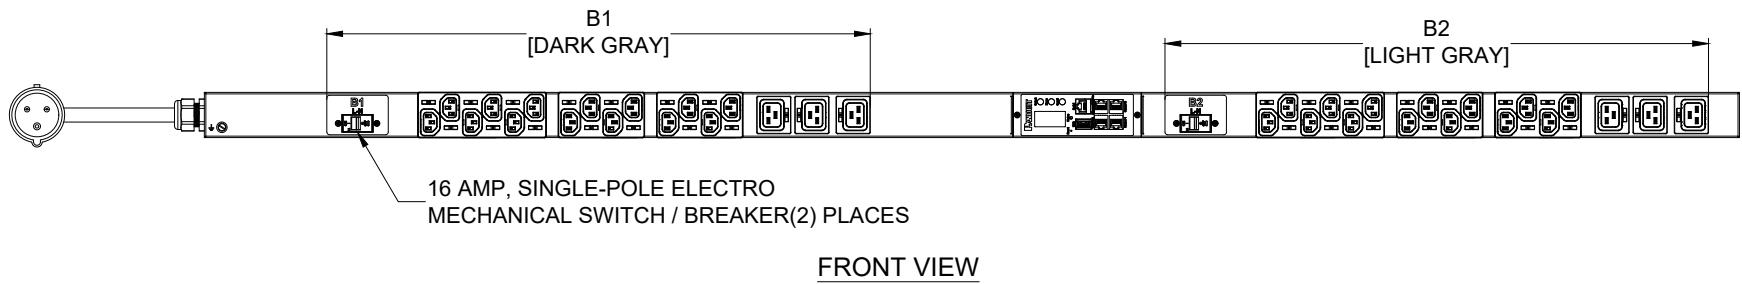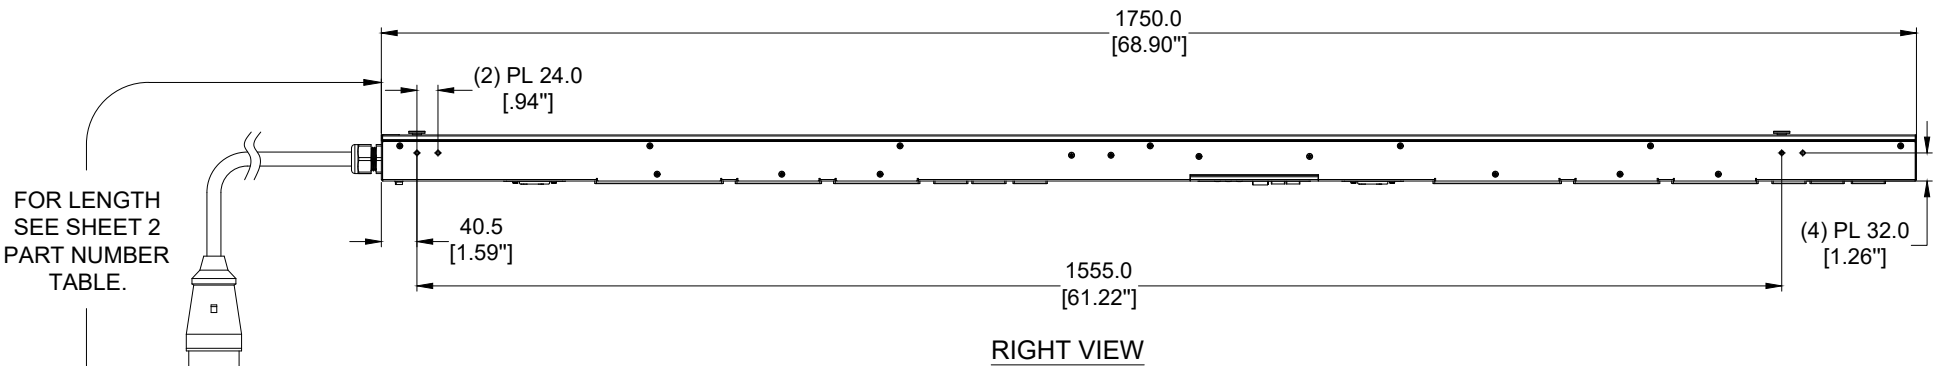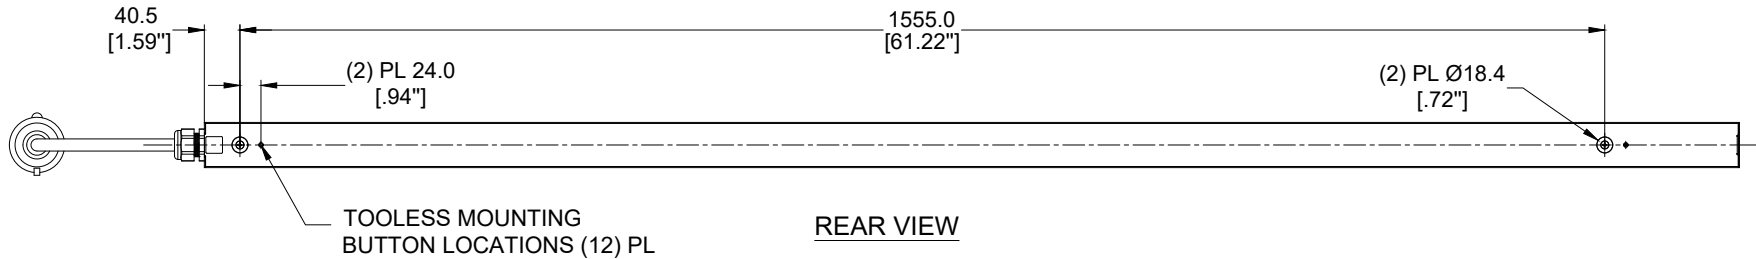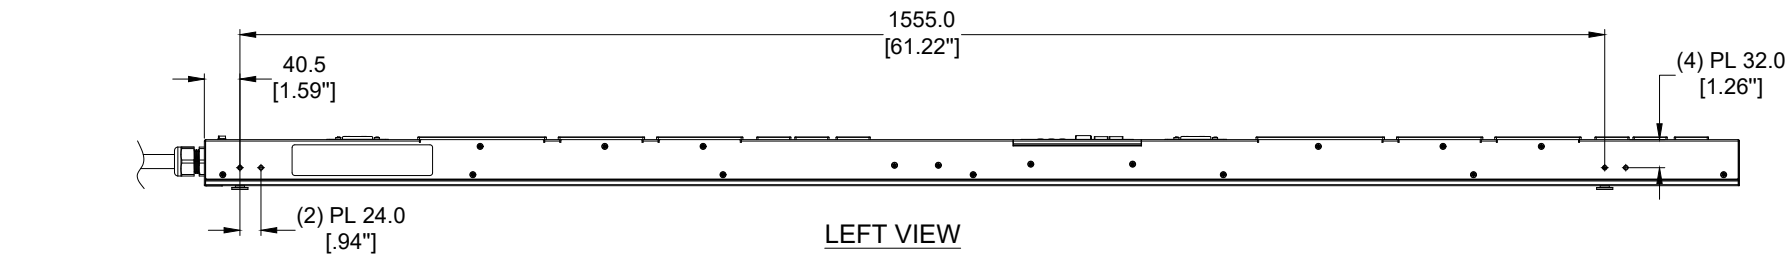

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPLASHPROOF)
32A, 200-250V MAX RATED INPUT




RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

00A	09/21/2023	NW	CSH	MJD	INITIAL RELEASE	P34D41G-XXYZ
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY				SIGN DATE PRINT	
TITLE INTELLIGENT SERIES PDU P34D41G-XXYZ CUSTOMER DRAWING					
ITEM REVISION NAME:					
DATASHEET FILE NAME:					
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:	
 THIRD ANGLE PROJECTION				Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0 N/A	
DRAWN BY NW DATE 08/30/2023 CHK CSH SCALE NONE				DRAWING NUMBER: P34D41G-XXYZ_DC	
				SHT 1 OF 2	
				SCALE B	



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P34D41G	G6 MI PDU, 32AMP, (28) C13 (6) C19, IEC 60309 2P 3W 6H IP44-3M, TOP FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM) 10' [+10/-5"]	6.5kg

B

B

A

A

							WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY SIGN DATE PRINT
00A	09/21/2023	NW	CSH	MJD	INITIAL RELEASE	P34D41G-XXYZ	
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	

TITLE

INTELLIGENT SERIES PDU
P34D41G-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)

0<L≤50 ±0.5

50<L≤250 ±1.0

250<L≤500 ±1.5

500<L≤1000 ±2.5

1000<L≤2000 ±4.0

MATERIAL/COLOR:

N/A

DRAWING NUMBER:

P34D41G-XXYZ_DC

DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2	SCALE B
NW	08/30/2023	CSH	NONE		

