



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

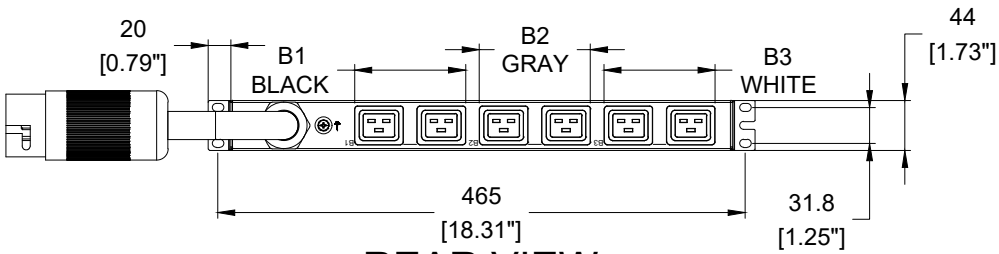


REAR VIEW

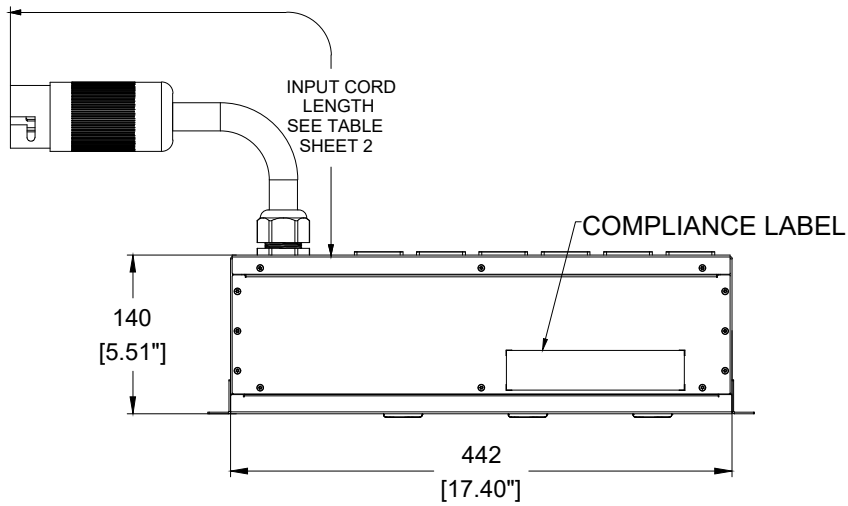

TOP VIEW

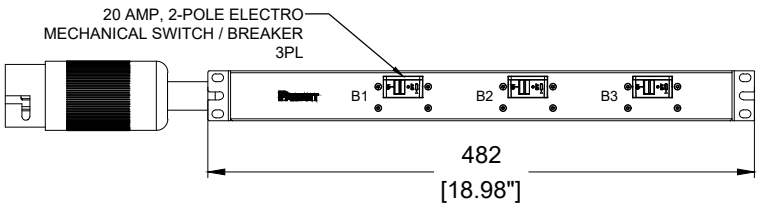

FRONT VIEW



SIDE VIEW

SPECIFICATION:


- STANDARD
UNIT TYPE: BASIC
ORIENTATION: HORIZONTAL (1U)
OUTLET QTY & TYPE: (6)C19
INPUT VOLTAGE: 200-240VAC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 50A(40A DERATED)
BREAKER QTY & TYPE: (3)20AMP, DOUBLE-POLE
INPUT PHASE: SINGLE-PHASE,L-L
RATED POWER: 8.3 kVA
INPUT PLUG: CS8265 50A 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
- ADDITIONAL:
NONE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY: (4) M6 × 12 PAN HEAD MACHINE SCREW
QTY: (4) M6 CAGE NUT

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: E06B48M-XXYZ

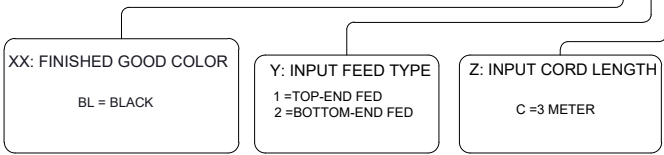

PLUG / RECEPTACLE BLOCK



PLUG
CS8265 50A 3W
50A, 250VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT

00A	12/05/2025	Mucl	MIM	MJD	INITIAL RELEASE	E06B48M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-140mm	
PART NUMBER		E06B48M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU							
E06B48M							
CONTROL DRAWING							
ITEM REVISION NAME:				PANDUIT			
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED				MATERIAL / COLOR:			
DIMENSIONAL TOLERANCE ARE :mm [IN]				N/A			
Tolerance (mm)							
0<L≤50 ±0.5							
50<L≤250 ±1.0							
250<L≤500 ±1.5							
500<L≤1000 ±2.5							
1000<L≤2000 ±4.0							
THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E06B48M_DC			
DRAWN BY		DATE		CHK		SCALE	
Mucl		12/05/2025		MIM		NONE	
SHT 1 OF 2						SCALE	
						B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E06B48M	BASIC PDU, 50A(40A DERATED), (6)C19, CS8265 50A 3W-3M, REAR-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

2

↓

1

00A	12/05/2025	Mucl	MIM	MJD	INITIAL RELEASE	E06B48M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-140mm	
PART NUMBER		E06B48M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E06B48M CONTROL DRAWING							
ITEM REVISION NAME:				PANDUIT			
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:			
THIRD ANGLE PROJECTION				N/A			
				DRAWING NUMBER:			
				E06B48M_DC			
				SCALE			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	12/05/2025	MIM	NONE			B	