

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:

ORIENTATION:

OUTLET QTY & TYPE:

INPUT VOLTAGE:

INPUT FREQUENCY:

INPUT CURRENT:

BREAKER QTY & TYPE:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT POWER CORD:

REGULATORY STANDARD:

BASIC

HORIZONTAL (1U)

(12)5-20R

100-120VAC

50/60HZ

15A(12A DERATED)

NONE

SINGLE PHASE, L-N

1.4 KVA

NEMA 5-15P 3W

SEE SHEET 2 PART NUMBER TABLE

UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:

PRODUCT SAFETY WARNING SHEET

QTY: (4) M6 X 12 PAN HEAD MACHINE SCREW


QTY: (4) M6 CAGE NUT

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E12B02M-XXYZ

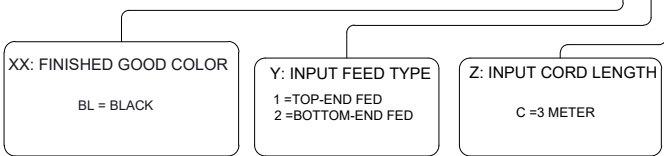


PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-45mm			
PART NUMBER				E12B02M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER				QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE									
INTELLIGENT SERIES PDU									
E12B02M									
CONTROL DRAWING									
ITEM REVISION NAME:									
DATASHEET FILE NAME:									
UNLESS OTHERWISE SPECIFIED					MATERIAL/COLOR:				
DIMENSIONAL TOLERANCE ARE: mm [IN]					N/A				
Tolerance (mm)									
0<L≤50 ±0.5									
50<L≤250 ±1.0									
250<L≤500 ±1.5									
500<L≤1000 ±2.5									
1000<L≤2000 ±4.0									
 THIRD ANGLE PROJECTION					DRAWING NUMBER:				
					E12B02M_DC				
DRAWN BY		DATE		CHK		SCALE			
MCL		04/09/2026		MIM		NONE		SHT 1 OF 2	
								SCALE	
								B	

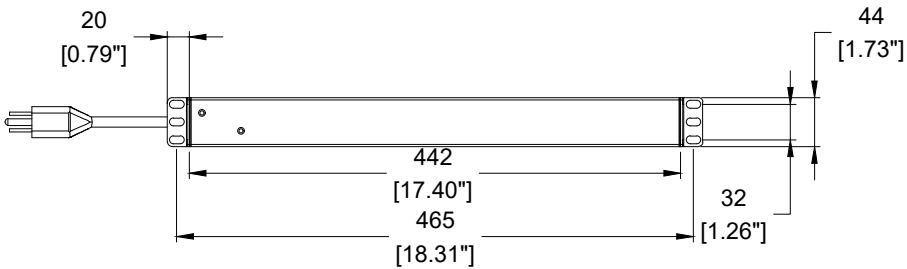


REAR VIEW

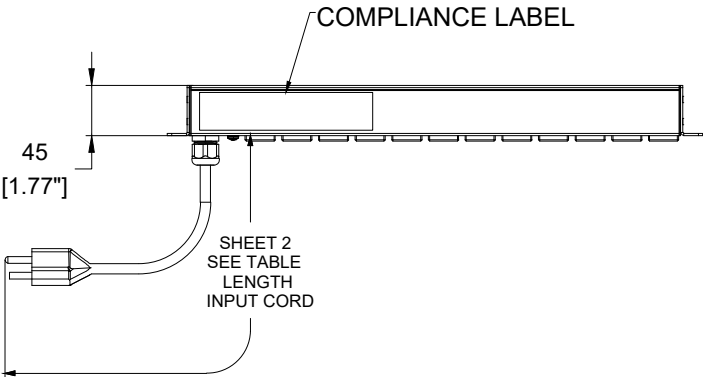

TOP VIEW

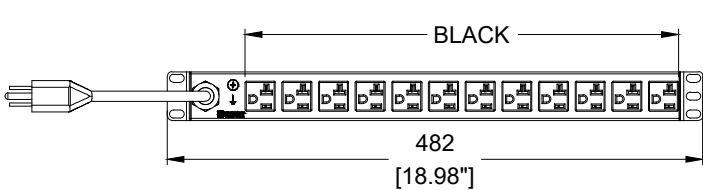

FRONT VIEW



SIDE VIEW

PLUG / RECEPTACLE BLOCK



PLUG
NEMA 5-15P 3W
15A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
20A, 125V MAX RATED OUTPUT

00A	04/09/2026	MCL	MIM	MJD	INITIAL RELEASE	E12B02M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E12B02M	BASIC PDU, 15A(12A DERATED), (12)5-20R, NEMA 5-15P 3W-3M, FRONT-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	04/09/2026	MCL	MIM	MJD	INITIAL RELEASE	E12B02M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-45mm	
PART NUMBER		E12B02M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E12B02M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION  Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				DRAWING NUMBER:			
				E12B02M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
MCL	04/09/2026	MIM	NONE			B	