



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

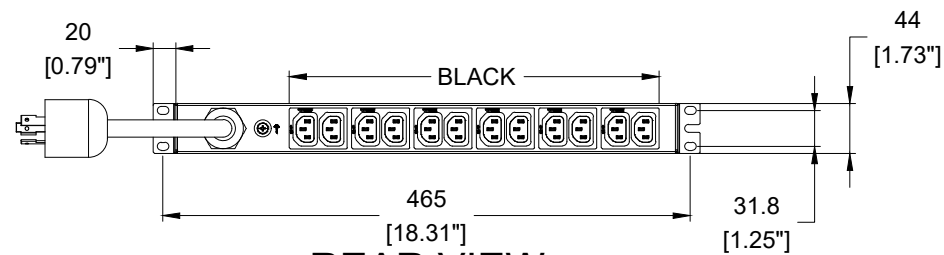


REAR VIEW

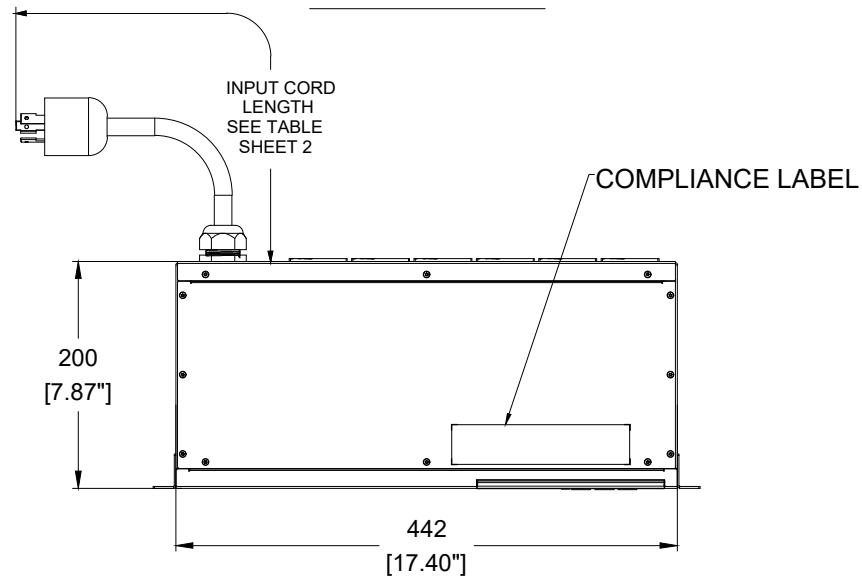

TOP VIEW

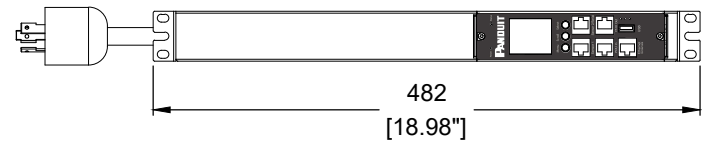

FRONT VIEW



SIDE VIEW

SPECIFICATION:


- STANDARD
UNIT TYPE: MONITORED INPUT
ORIENTATION: HORIZONTAL (1U)
OUTLET QTY & TYPE: (12)C13
INPUT VOLTAGE: 100-240VAC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 20A(16A DERATED)
BREAKER QTY & TYPE: NONE
INPUT PHASE: SINGLE-PHASE,L-L
RATED POWER: 3.3 kVA
INPUT PLUG: NEMA L6-20P 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
- ADDITIONAL:
NONE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY: (4) M6 × 12 PAN HEAD MACHINE SCREW
QTY: (4) M6 CAGE NUT

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E12D13M-XXYZ

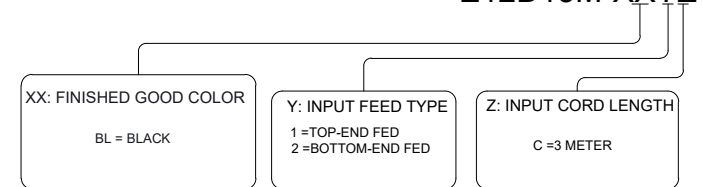

PLUG / RECEPTACLE BLOCK





PLUG
NEMA L6-20P 3W
20A, 250VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT

00A	12/08/2025	Mucl	MIM	MJD	INITIAL RELEASE	E12D13M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200mm	
PART NUMBER		E12D13M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E12D13M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]  THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
				DRAWING NUMBER:			
				E12D13M_DC			
DRAWN BY		DATE		CHK		SCALE	
Mucl		12/08/2025		MIM		NONE	
SHT 1 OF 2						SCALE	
						B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E12D13M	MI PDU, 20A(16A DERATED), (12)C13, NEMA L6-20P 3W-3M, REAR-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	12/08/2025	Mucl	MIM	MJD	INITIAL RELEASE	E12D13M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200mm	
PART NUMBER		E12D13M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E12D13M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0				MATERIAL/COLOR:			
				N/A			
				DRAWING NUMBER:			
				E12D13M_DC			
				DRAWN BY		DATE	
Mucl		12/08/2025		MIM		NONE	
SHT 2 OF 2				SCALE			
				B			