

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:


BASIC
VERTICAL, 0U MID
(16)5-20R
100-120AC
50/60HZ
20A(16A DERATED)
NONE
SINGLE-PHASE,L-N
1.9 kVA
NEMA 5-20P 3W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET


NOTES:



1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E16B07M-XXYZ

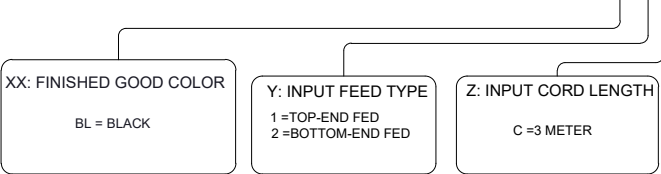

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E16B07M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU							
E16B07M							
CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED				MATERIAL/COLOR:			
DIENSIONAL TOLERANCE ARE: mm [IN]				N/A			
Tolerance (mm)							
0<L≤50 ±0.5							
50<L≤250 ±1.0							
250<L≤500 ±1.5							
500<L≤1000 ±2.5							
1000<L≤2000 ±4.0							
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E16B07M_DC			
DRAWN BY		DATE		CHK		SCALE	
MucI		04/09/2026		MIM		NONE	
SHT 1 OF 2						SCALE	
						B	

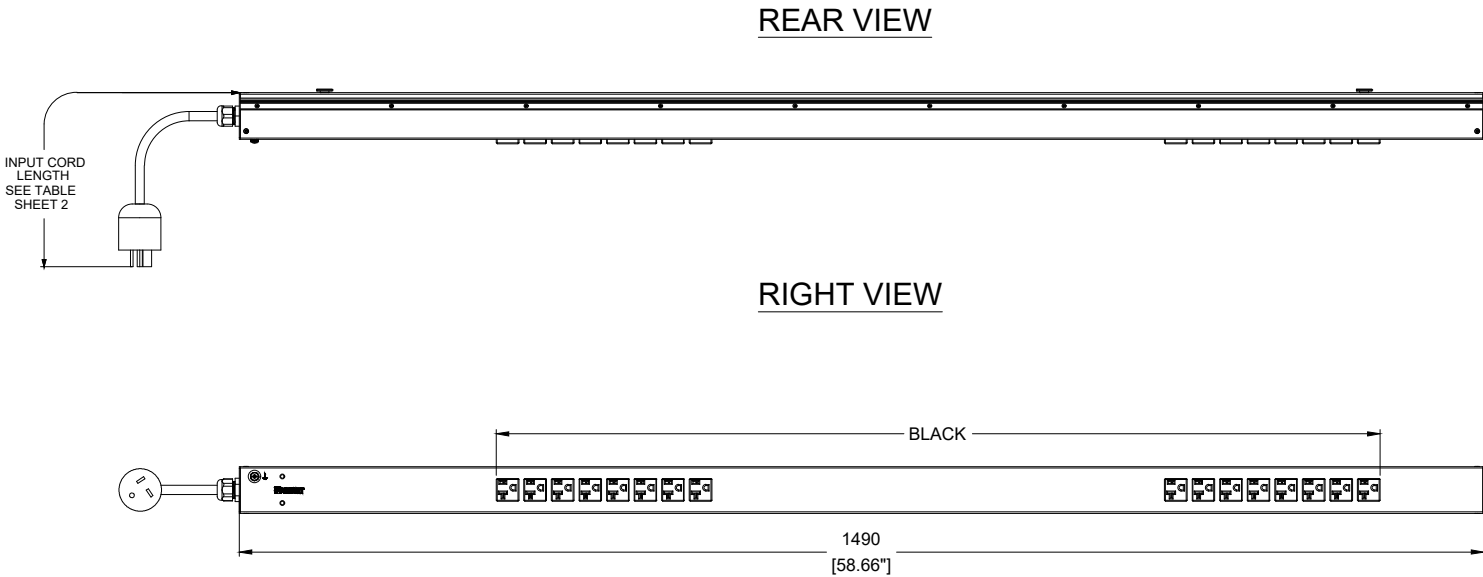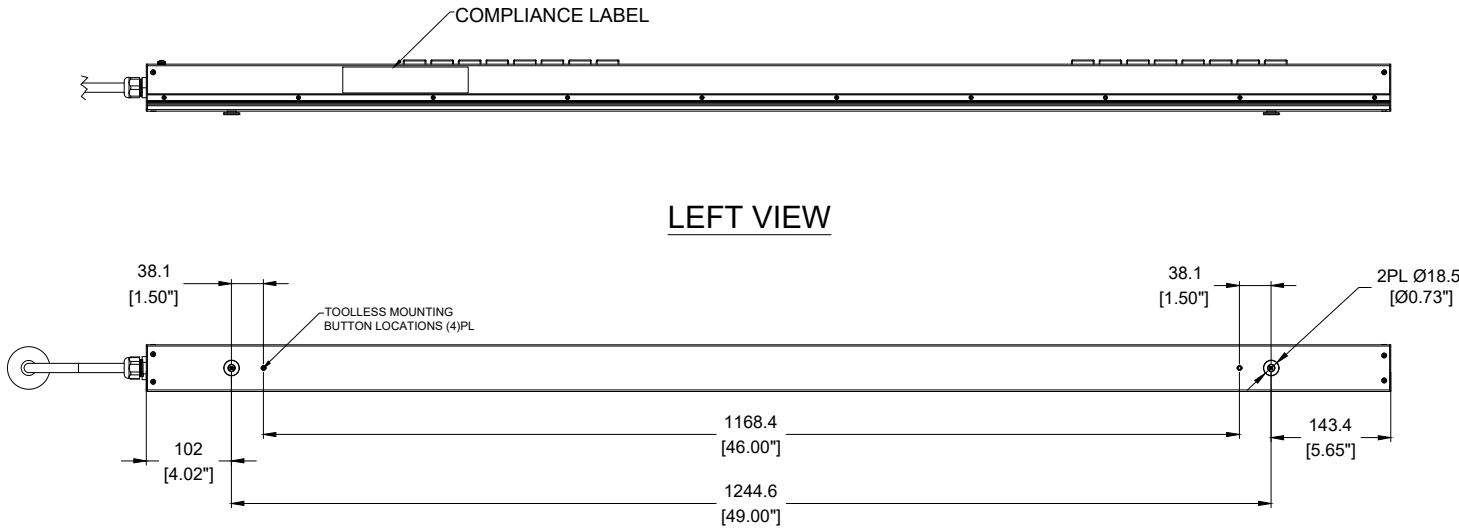

PLUG / RECEPTACLE BLOCK



PLUG
NEMA 5-20P 3W
20A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
16A, 125V MAX RATED OUTPUT

00A	04/09/2026	MucI	MIM	MJD	INITIAL RELEASE	E16B07M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E16B07M	BASIC, 20A(16A DERATED), (16)5-20R, NEMA 5-20P 3W-3M,TOP-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E16B07M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E16B07M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E16B07M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:			
 THIRD ANGLE PROJECTION				N/A			
				DRAWING NUMBER:			
				E16B07M_DC			
				SCALE			
				NONE			
DRAWN BY		DATE		CHK		SCALE	
Mucl		04/09/2026		MIM		NONE	
SHT 2 OF 2						SCALE	
						B	