




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

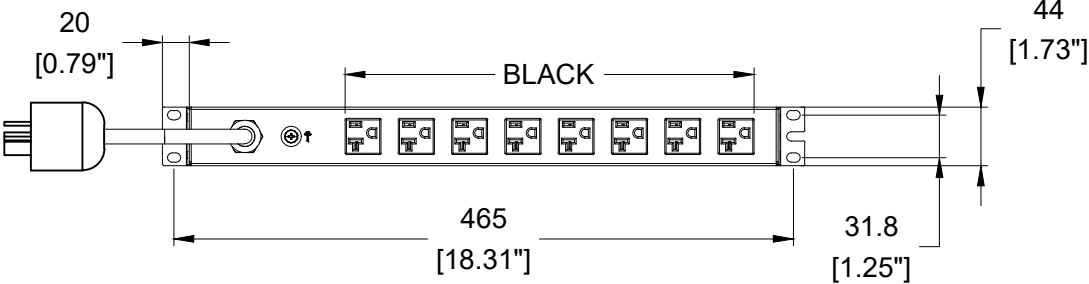


REAR VIEW

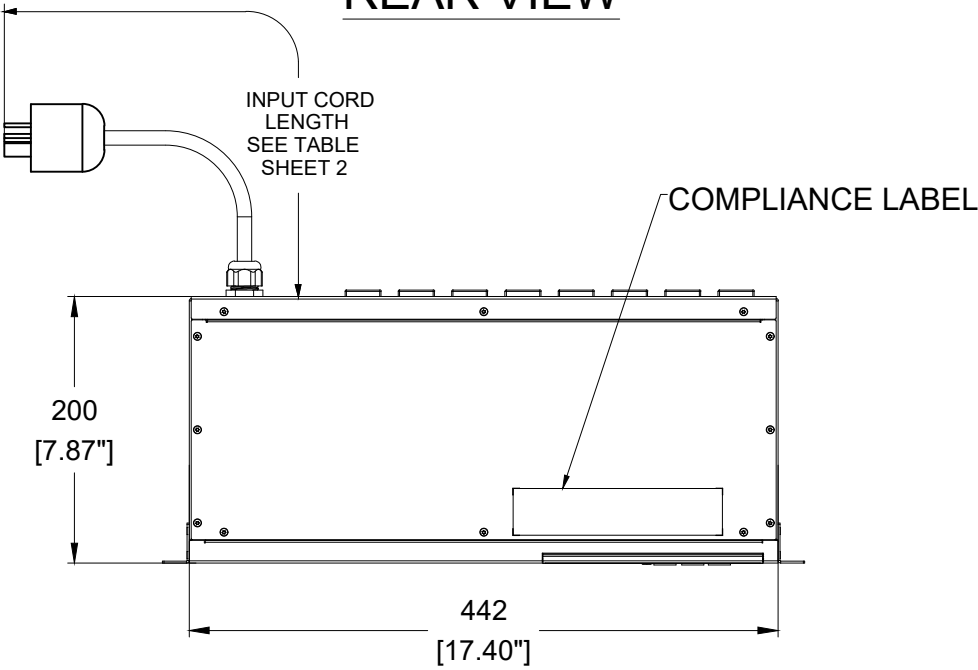

TOP VIEW

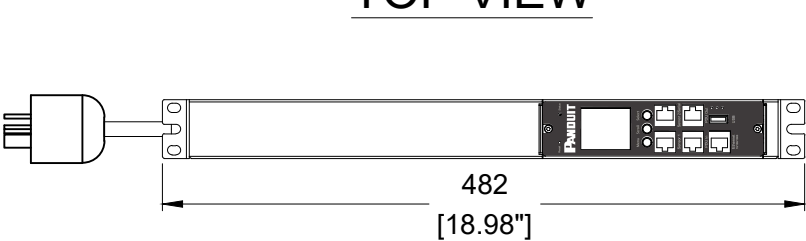

FRONT VIEW



SIDE VIEW

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:


- STANDARD
UNIT TYPE: MONITORED INPUT
ORIENTATION: HORIZONTAL(1U)
OUTLET QTY & TYPE: (8)5-20R
INPUT VOLTAGE: 100-120VAC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 20A(16A DERATED)
BREAKER QTY & TYPE: NONE
INPUT PHASE: SINGLE-PHASE,L-N
RATED POWER: 1.9 kVA
INPUT PLUG: NEMA 5-20P 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
- ADDITIONAL:
NONE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY:(4) M6 × 12 PAN HEAD MACHINE SCREW
QTY:(4) M6 CAGE NUT

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E08D10M-XXYZ

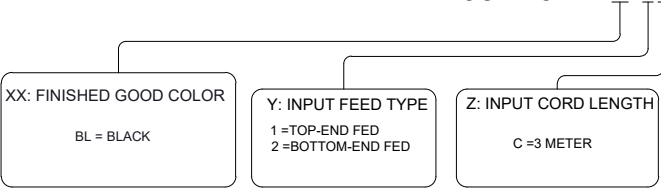

PLUG / RECEPTACLE BLOCK




PLUG
NEMA 5-20P 3W
20A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
20A, 125V MAX RATED OUTPUT

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E08D10M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200MM	
PART NUMBER		E08D10M		WORK INSTRUCTION		RD-01-02-25	
INSPCTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE INTELLIGENT SERIES PDU E08D10M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]  THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
				DRAWING NUMBER: E08D10M_DC			
DRAWN BY		DATE	CHK	SCALE		SCALE	
Mucl		04/09/2026	MIM	NONE		SHT 1 OF 2	
						B	

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E08D09M	MI PDU, 20A(16A DERATED), (8)5-20R, NEMA 5-20P 3W-3M, REAR-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E08D10M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200MM	
PART NUMBER		E08D10M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E08D10M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0 THIRD ANGLE PROJECTION				MATERIAL/COLOR:			
				N/A			
				DRAWING NUMBER:			
				E08D10M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	04/09/2026	MIM	NONE			B	