



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

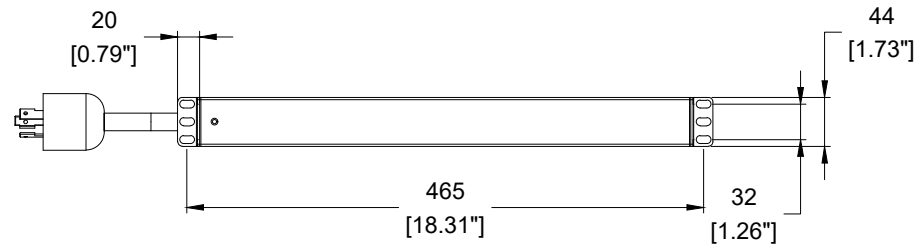


REAR VIEW

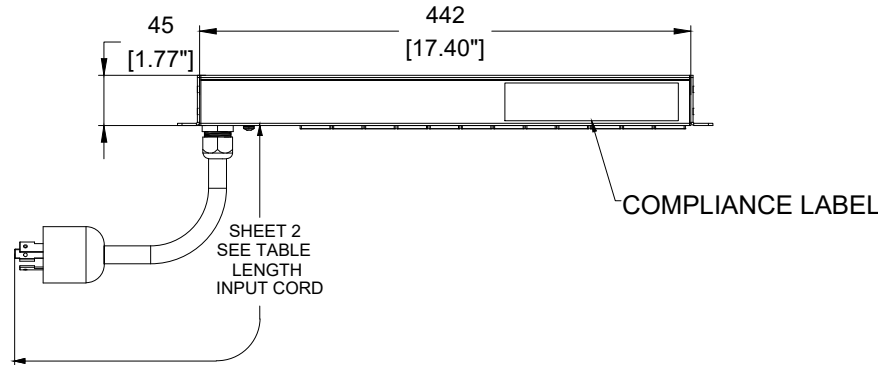

TOP VIEW

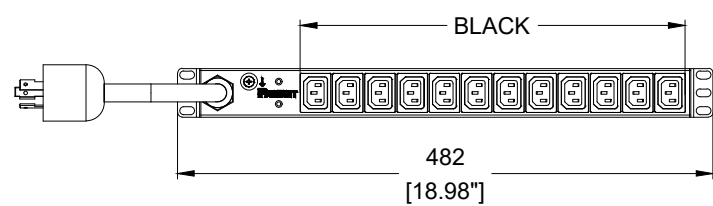

FRONT VIEW



SIDE VIEW

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:


BASIC
HORIZONTAL (1U)
(12)C13
100-240VAC
50/60HZ
20A(16A DERATED)
NONE
SINGLE PHASE, L-N
3.3 KVA
NEMA L6-20P 3W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY: (4) M6 X 12 PAN HEAD MACHINE SCREW
QTY: (4) M6 CAGE NUT

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E12B46M-XXYZ

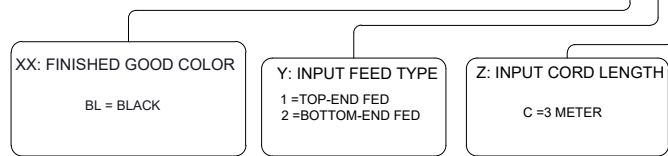

PLUG / RECEPTACLE BLOCK




PLUG
NEMA L6-20P 3W
20A, 250VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT

00A	04/09/2026	MCL	MIM	MJD	INITIAL RELEASE	E12B46M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-45mm	
PART NUMBER		E12B46M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU							
E12B46M							
CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED				MATERIAL/COLOR:			
DIMENSIONAL TOLERANCE ARE: mm [IN]				N/A			
Tolerance (mm)				 THIRD ANGLE PROJECTION			
0<L≤50 ±0.5							
50<L≤250 ±1.0							
250<L≤500 ±1.5							
500<L≤1000 ±2.5							
1000<L≤2000 ±4.0				DRAWING NUMBER:			
				E12B46M_DC			
DRAWN BY		DATE		CHK		SCALE	
MCL		04/09/2026		MIM		NONE	
SHT 1 OF 2						SCALE	
						B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E12B46M	BASIC PDU, 20A(16A DERATED), (12)C13, NEMA L6-20P 3W-3M, FRONT-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

2

↓

1

00A	04/09/2026	MCL	MIM	MJD	INITIAL RELEASE	E12B46M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-45mm	
PART NUMBER		E12B46M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E12B46M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:			
 THIRD ANGLE PROJECTION				N/A			
				DRAWING NUMBER:			
				E12B46M_DC			
				SHT 2 OF 2			
				SCALE			
DRAWN BY	DATE	CHK	SCALE			SCALE	
MCL	04/09/2026	MIM	NONE			B	