

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:

ORIENTATION:

OUTLET QTY & TYPE:

INPUT VOLTAGE:

INPUT FREQUENCY:

INPUT CURRENT:

BREAKER QTY & TYPE:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT POWER CORD:

REGULATORY STANDARD:

BASIC

VERTICAL, 0U MID

(16)5-20R

100-120VAC

50/60HZ

15A(12A DERATED)

NONE

SINGLE-PHASE,L-N

1.4 kVA

NEMA 5-15P 3W

SEE SHEET 2 PART NUMBER TABLE

UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:


PRODUCT SAFETY WARNING SHEET

NOTES:





1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E16B04M-XXYZ

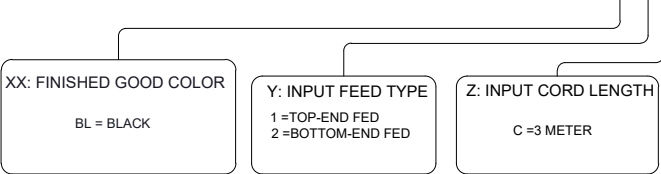

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E16B04M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E16B04M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) THIRD ANGLE PROJECTION 0<L≤50±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0				MATERIAL/COLOR:			
				N/A			
DRAWN BY Mucl				DRAWING NUMBER:			
				E16B04M_DC			
DATE		CHK		SCALE		SCALE	
03/04/2026		MIM		NONE		SHT 1 OF 2	
						B	

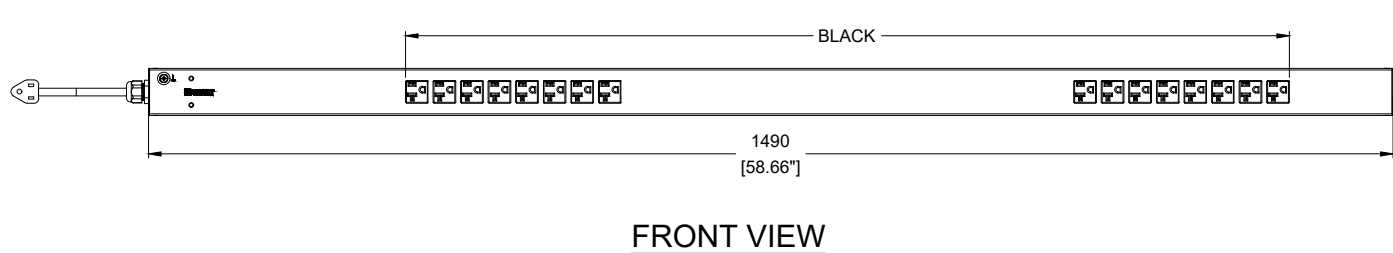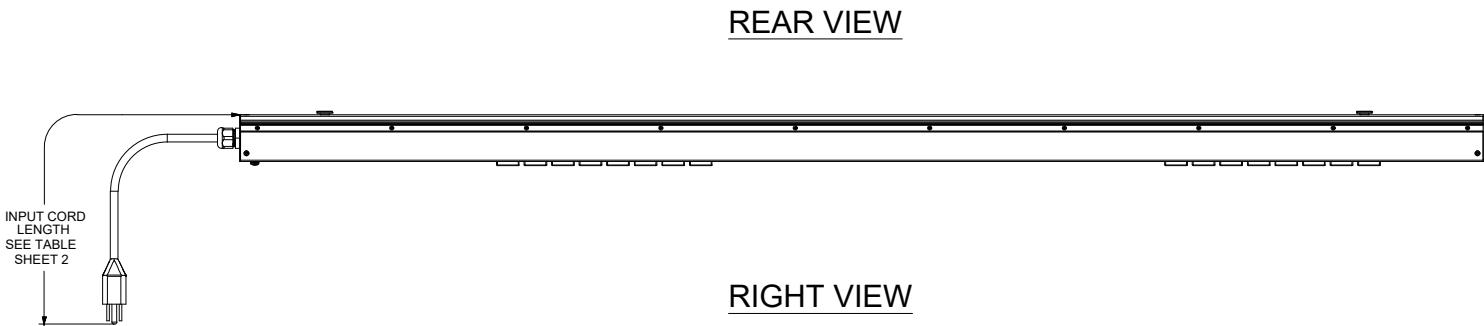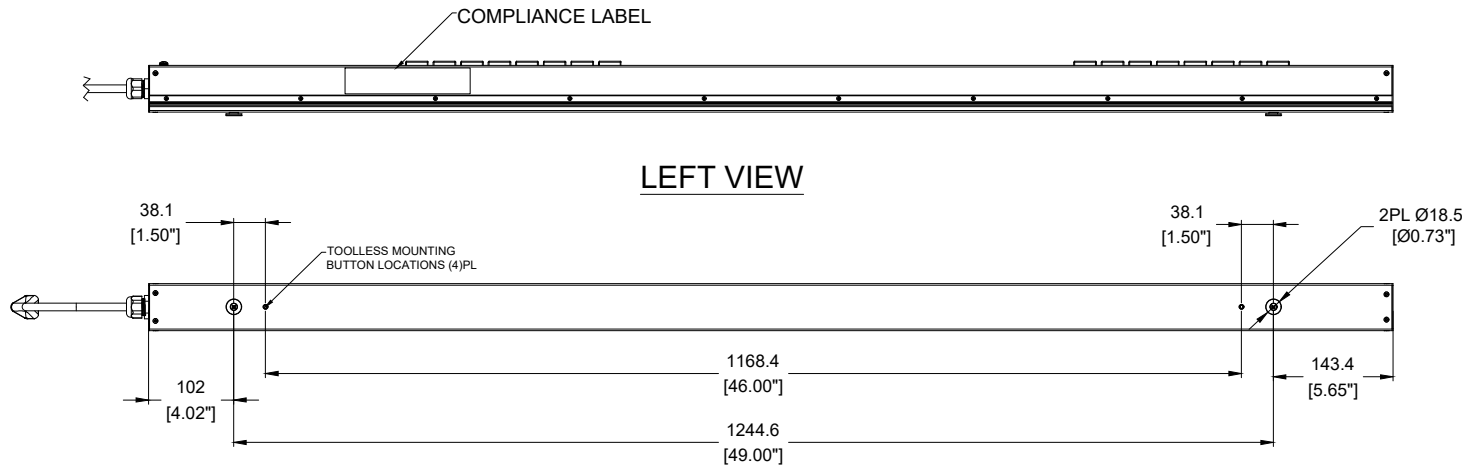

PLUG / RECEPTACLE BLOCK



PLUG
NEMA 5-15P 3W
15A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
16A, 125V MAX RATED OUTPUT

00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E16B04M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E16B04M	BASIC PDU, 15A(12A DERATED), (16)5-20R, NEMA 5-15P 3W-3M,TOP-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E16B04M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E16B04M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E16B04M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E16B04M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	03/04/2026	MIM	NONE			B	