




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

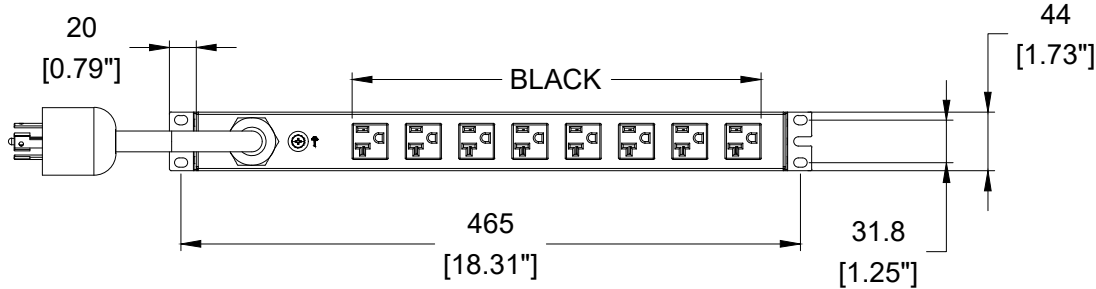

REAR VIEW

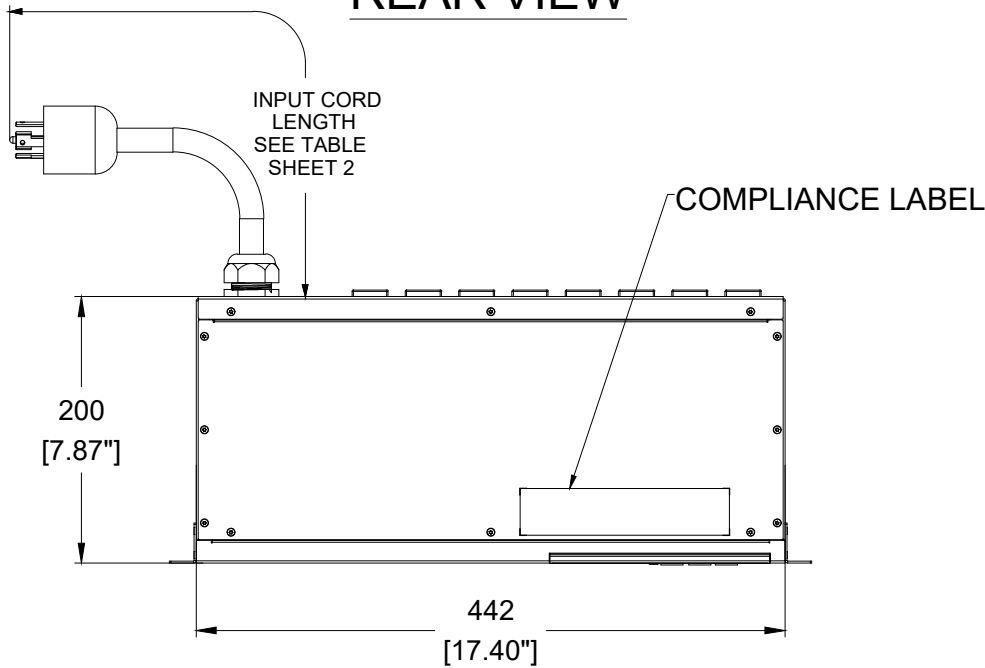

TOP VIEW

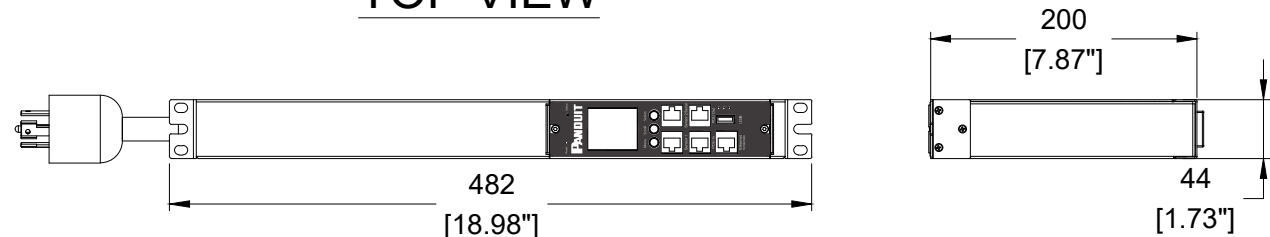

FRONT VIEW

SIDE VIEW

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:


1. STANDARD
- UNIT TYPE: MONITORED INPUT
- ORIENTATION: HORIZONTAL(1U)
- OUTLET QTY & TYPE: (8)5-20R
- INPUT VOLTAGE: 100-120VAC
- INPUT FREQUENCY: 50/60HZ
- INPUT CURRENT: 20A(16A DERATED)
- BREAKER QTY & TYPE: NONE
- INPUT PHASE: SINGLE-PHASE,L-N
- RATED POWER: 1.9 kVA
- INPUT PLUG: NEMA L5-20P 3W
- INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
- REGULATORY STANDARD: UL 498 COMPLIANT
2. ADDITIONAL: NONE
3. ACCESSORIES: PRODUCT SAFETY WARNING SHEET
- QTY:(4) M6 × 12 PAN HEAD MACHINE SCREW
- QTY:(4) M6 CAGE NUT

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
- SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: E08D11M-XXYZ

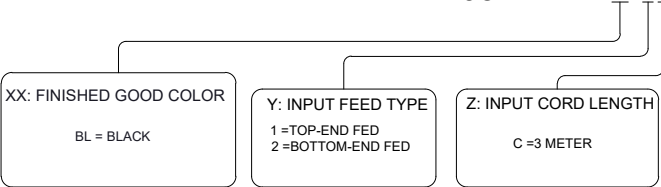

PLUG / RECEPTACLE BLOCK




PLUG
NEMA L5-20P 3W
20A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
20A, 125V MAX RATED OUTPUT

00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E08D11M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200MM	
PART NUMBER		E08D11M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU							
E08D11M							
CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED				MATERIAL/COLOR:			
DIMENSIONAL TOLERANCE ARE: mm [IN]				N/A			
Tolerance (mm)				DRAWING NUMBER:			
0<L≤50 ±0.5				E08D11M_DC			
50<L≤250 ±1.0							
250<L≤500 ±1.5							
500<L≤1000 ±2.5							
1000<L≤2000 ±4.0							
 THIRD ANGLE PROJECTION							
DRAWN BY		DATE		CHK		SCALE	
Mucl		03/04/2026		MIM		NONE	
						SHT 1 OF 2	
						SCALE	
						B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E08D11M	MI PDU, 20A(16A DERATED), (8)5-20R, NEMA L5-20P 3W-3M, REAR-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

2

↓

1

00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E08D11M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200MM					
PART NUMBER		E08D11M		WORK INSTRUCTION		RD-01-02-25					
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01					
TITLE											
INTELLIGENT SERIES PDU E08D11M CONTROL DRAWING											
ITEM REVISION NAME:				PANDUIT							
DATASHEET FILE NAME:											
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:							
THIRD ANGLE PROJECTION				N/A							
				DRAWING NUMBER:							
				E08D11M_DC							
				DRAWN BY		DATE		CHK		SCALE	
				Mucl		03/04/2026		MIM		NONE	
				SHT 2 OF 2		SCALE					
						B					