

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:

ORIENTATION:

OUTLET QTY & TYPE:

INPUT VOLTAGE:

INPUT FREQUENCY:

INPUT CURRENT:

BREAKER QTY & TYPE:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT POWER CORD:

REGULATORY STANDARD:

BASIC

HORIZONTAL (1U)

(12)5-20R

100-120VAC

50/60HZ

20A(16A DERATED)

NONE

SINGLE PHASE, L-N

1.9 KVA

NEMA 5-20P 3W

SEE SHEET 2 PART NUMBER TABLE

UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:

PRODUCT SAFETY WARNING SHEET

QTY: (4) M6 X 12 PAN HEAD MACHINE SCREW


QTY: (4) M6 CAGE NUT


NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E12B19M-XXYZ

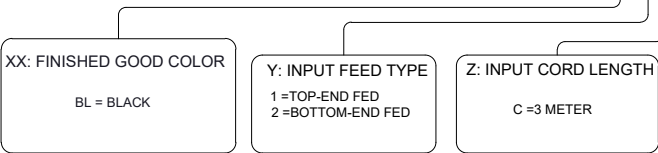


PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-45mm	
PART NUMBER		E12B19M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E12B19M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]  THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
				DRAWING NUMBER: E12B19M_DC			
DRAWN BY		DATE	CHK	SCALE			
MCL		04/09/2026	MIM	NONE		SHT 1 OF 2	
						SCALE B	

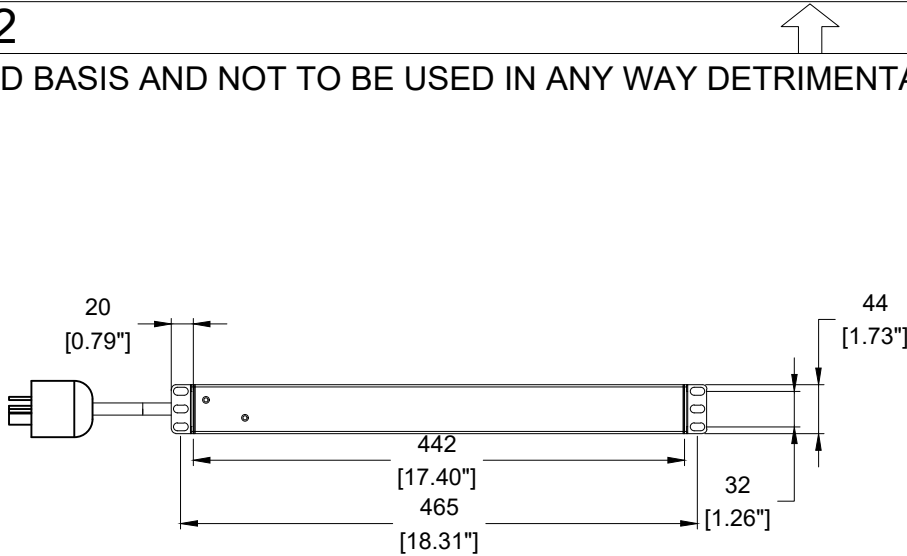


REAR VIEW

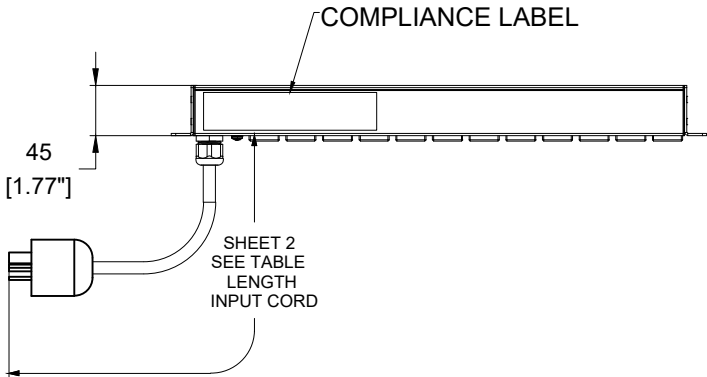

TOP VIEW

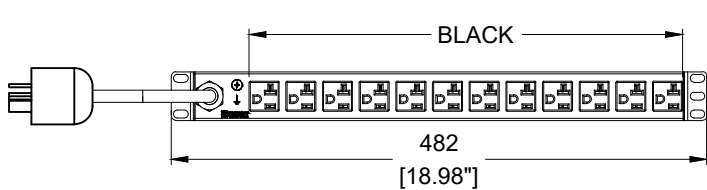

FRONT VIEW



SIDE VIEW

PLUG / RECEPTACLE BLOCK



PLUG
NEMA 5-20P 3W
20A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
20A, 125V MAX RATED OUTPUT

00A	04/09/2026	MCL	MIM	MJD	INITIAL RELEASE	E12B19M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E12B19M	BASIC PDU, 20A(16A DERATED), (12)5-20R, NEMA 5-20P 3W-3M, FRONT-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

2

↓

1

00A	04/09/2026	MCL	MIM	MJD	INITIAL RELEASE	E12B19M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-45mm	
PART NUMBER		E12B19M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E12B19M CONTROL DRAWING							
ITEM REVISION NAME:				PANDUIT			
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:			
THIRD ANGLE PROJECTION				N/A			
				DRAWING NUMBER:			
				E12B19M_DC			
				SCALE			
				NONE			
DRAWN BY		DATE		CHK		SCALE	
MCL		04/09/2026		MIM		NONE	
SHT 2 OF 2						SCALE	
						B	