




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

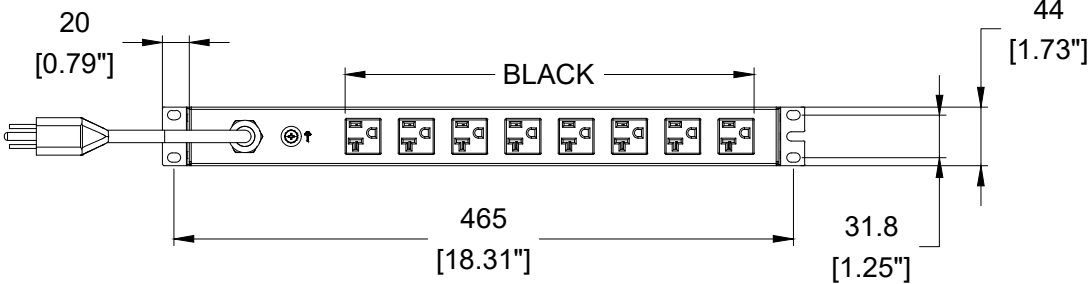


REAR VIEW

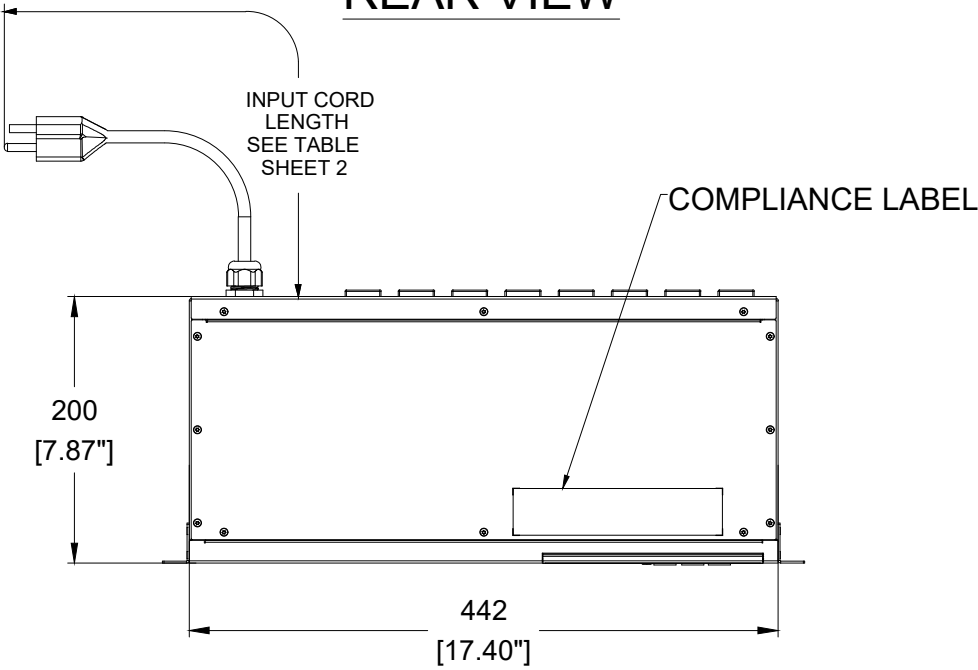

TOP VIEW

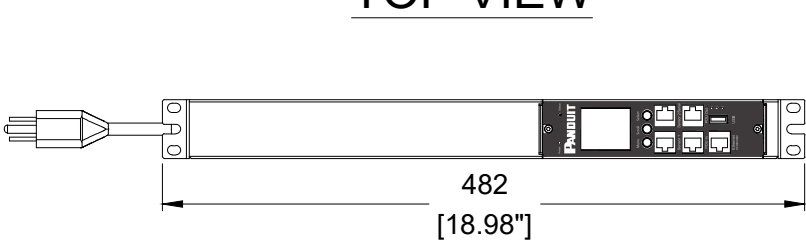

FRONT VIEW



SIDE VIEW

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:


MONITORED INPUT
HORIZONTAL(1U)
(8)5-20R
100-120VAC
50/60HZ
15A(12A DERATED)
NONE
SINGLE-PHASE,L-N
1.4 kVA
NEMA 5-15P 3W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY:(4) M6 × 12 PAN HEAD MACHINE SCREW
QTY:(4) M6 CAGE NUT

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E08D09M-XXYZ

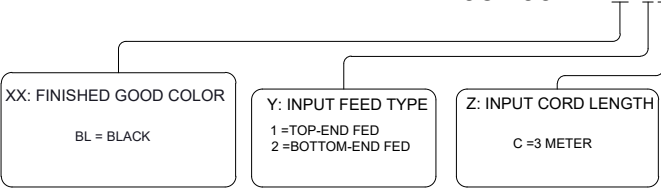

PLUG / RECEPTACLE BLOCK



PLUG
NEMA 5-15P 3W
15A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
20A, 125V MAX RATED OUTPUT

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E08D09M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200MM	
PART NUMBER		E08D09M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE INTELLIGENT SERIES PDU E08D09M CONTROL DRAWING							
ITEM REVISION NAME:				PANDUIT			
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
THIRD ANGLE PROJECTION				DRAWING NUMBER: E08D09M_DC			
DRAWN BY		DATE		CHK		SCALE	
Mucl		04/09/2026		MIM		NONE	
SHT 1 OF 2						SCALE B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E08D09M	MI PDU, 15A(12A DERATED), (8)5-20R, NEMA 5-15P 3W-3M, REAR-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E08D09M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-200MM					
PART NUMBER		E08D09M		WORK INSTRUCTION		RD-01-02-25					
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01					
TITLE											
INTELLIGENT SERIES PDU E08D09M CONTROL DRAWING											
ITEM REVISION NAME:				PANDUIT							
DATASHEET FILE NAME:											
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:							
THIRD ANGLE PROJECTION				N/A							
				DRAWING NUMBER:							
				E08D09M_DC							
				DRAWN BY		DATE		CHK		SCALE	
				Mucl		04/09/2026		MIM		NONE	
				SHT 2 OF 2		SCALE					
						B					