



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

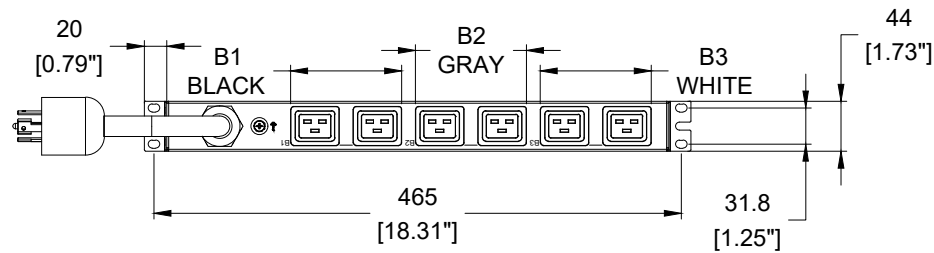


REAR VIEW

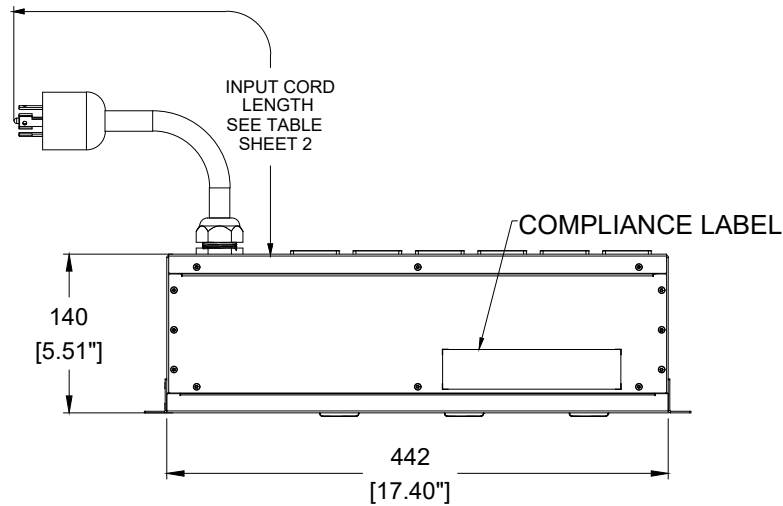

TOP VIEW

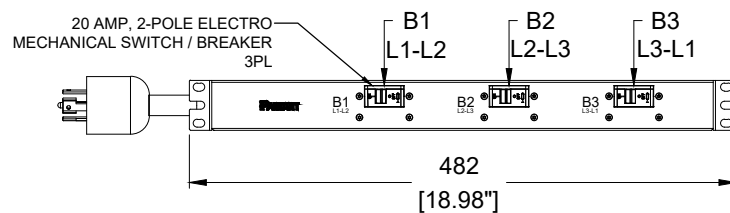

FRONT VIEW



SIDE VIEW

SPECIFICATION:


- STANDARD
UNIT TYPE: BASIC
ORIENTATION: HORIZONTAL (1U)
OUTLET QTY & TYPE: (6)C19
INPUT VOLTAGE: 100-120/200-240VAC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (3)20AMP, DOUBLE-POLE
INPUT PHASE: 3 PHASE DELTA ,L-L
RATED POWER: 8.6 kVA
INPUT PLUG: NEMA L21-30P 5W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
- ADDITIONAL:
NONE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY: (4) M6 × 12 PAN HEAD MACHINE SCREW
QTY: (4) M6 CAGE NUT

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E06B50M-XXYZ

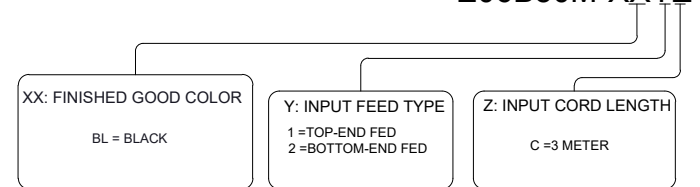

PLUG / RECEPTACLE BLOCK





PLUG
NEMA L21-30P 5W
30A, 208VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E06B50M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-140mm	
PART NUMBER		E06B50M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E06B50M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN]  THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER: E06B50M_DC			
DRAWN BY Mucl		DATE 04/09/2026		CHK MIM		SCALE NONE	
						SHT 1 OF 2	
						SCALE B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E06B50M	BASIC PDU, 30A(24A DERATED), (6)C19, NEMA L21-30P 5W-3M,REAR-PED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E06B50M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1U-140mm	
PART NUMBER		E06B50M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E06B50M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				N/A			
				DRAWING NUMBER:			
				E06B50M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	04/09/2026	MIM	NONE			B	