



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

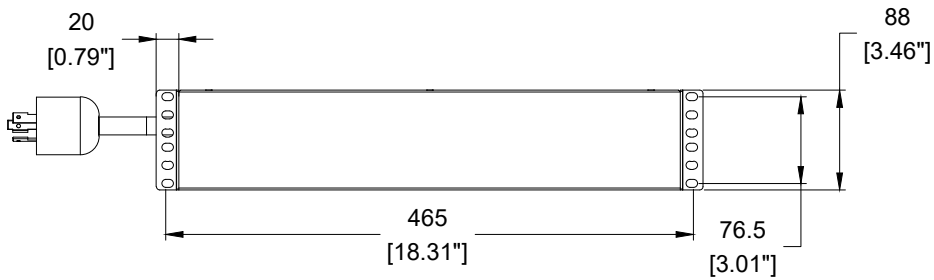

REAR VIEW

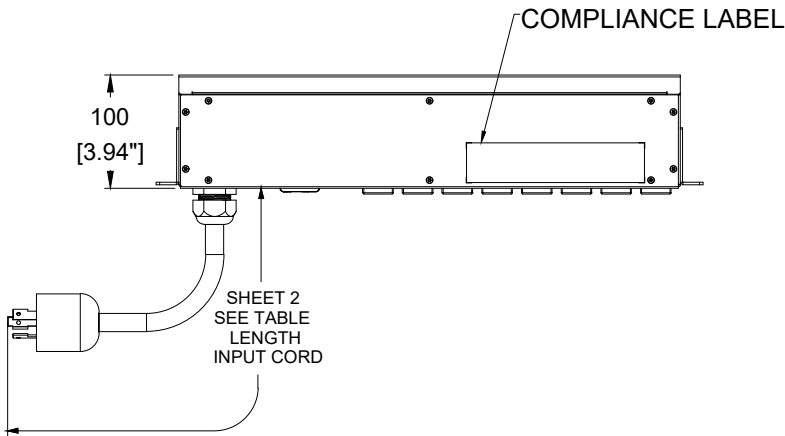

TOP VIEW

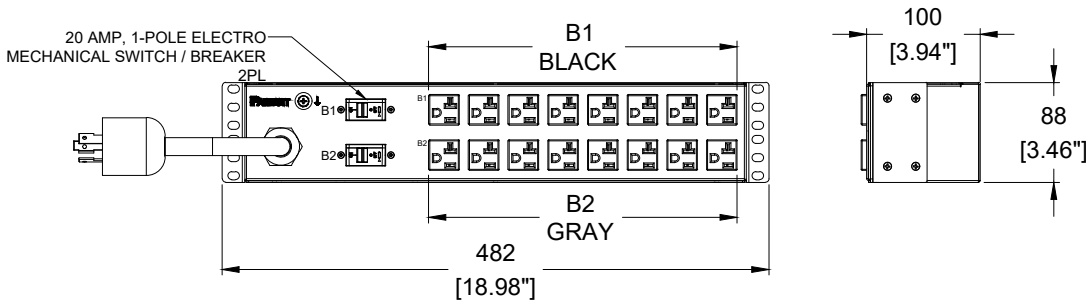

FRONT VIEW

SIDE VIEW

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:


BASIC
HORIZONTAL (2U)
(16)5-20R
100-120AC
50/60HZ
30A(24A DERATED)
(2)20AMP, SINGLE-POLE
SINGLE-PHASE,L-N
2.9 kVA
NEMA L5-30P 3W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY: (8) M6 × 12 PAN HEAD MACHINE SCREW
QTY: (8) M6 CAGE NUT

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E16B41M-XXYZ

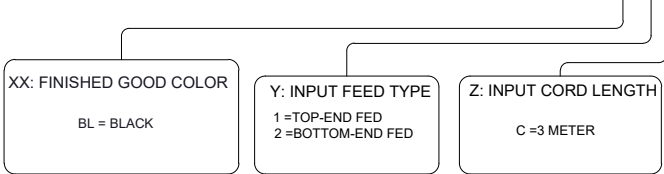

PLUG / RECEPTACLE BLOCK




PLUG
NEMA L5-30P 3W
30A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
16A, 125V MAX RATED OUTPUT

00A	12/05/2025	Mucl	MIM	MJD	INITIAL RELEASE	E16B41M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		2U-100mm											
PART NUMBER		E16B41M		WORK INSTRUCTION		RD-01-02-25											
INSPCTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01											
TITLE INTELLIGENT SERIES PDU E16B41M CONTROL DRAWING																	
ITEM REVISION NAME:																	
DATASHEET FILE NAME:																	
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE :mm [IN]  THIRD ANGLE PROJECTION Tolerance (mm) <table><tr><td>0<L≤50</td><td>±0.5</td></tr><tr><td>50<L≤250</td><td>±1.0</td></tr><tr><td>250<L≤500</td><td>±1.5</td></tr><tr><td>500<L≤1000</td><td>±2.5</td></tr><tr><td>1000<L≤2000</td><td>±4.0</td></tr></table>				0<L≤50	±0.5	50<L≤250	±1.0	250<L≤500	±1.5	500<L≤1000	±2.5	1000<L≤2000	±4.0	MATERIAL/COLOR:			
				0<L≤50	±0.5												
50<L≤250	±1.0																
250<L≤500	±1.5																
500<L≤1000	±2.5																
1000<L≤2000	±4.0																
				N/A													
				DRAWING NUMBER:													
				E16B41M_DC													
DRAWN BY		DATE	CHK	SCALE													
Mucl		12/05/2025	MIM	NONE		SHT 1 OF 2											
						SCALE B											

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E16B41M	BASIC PDU, 30A(24 DERATED), (16)5-20R, NEMA L5-30P 3W-3W,FRONT-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	12/05/2025	Mucl	MIM	MJD	INITIAL RELEASE	E16B41M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		2U-100mm	
PART NUMBER		E16B41M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E16B41M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E16B41M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	12/05/2025	MIM	NONE			B	