

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE: MONITORED INPUT
ORIENTATION: VERTICAL, 0U MID
OUTLET QTY & TYPE: (16)5-20R
INPUT VOLTAGE: 100-120AC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 20A(16A DERATED)
BREAKER QTY & TYPE: NONE
INPUT PHASE: SINGLE-PHASE,L-N
RATED POWER: 1.9 kVA
INPUT PLUG: NEMA L5-20P 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:


PRODUCT SAFETY WARNING SHEET


NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION





IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E16D22M-XXYZ

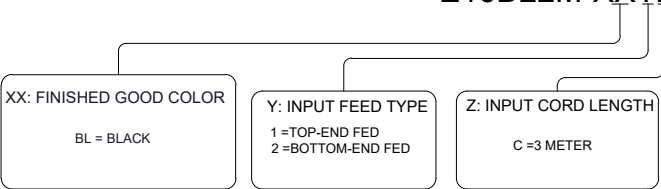


PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E16D22M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E16D22M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE :mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER: E16D22M_DC			
DRAWN BY		DATE		CHK		SCALE	
Mucl		12/08/2025		MIM		NONE	
						SHT 1 OF 2	
						SCALE B	

00A	12/08/2025	Mucl	MIM	MJD	INITIAL RELEASE	E16D22M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

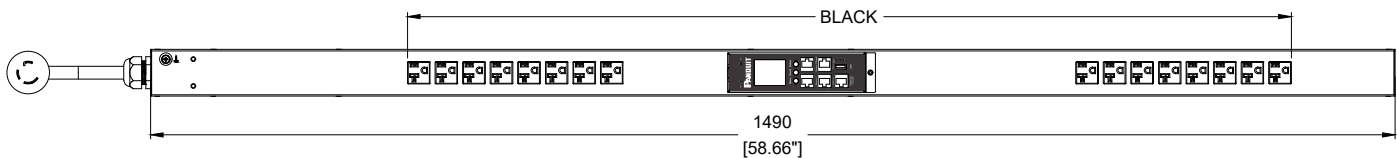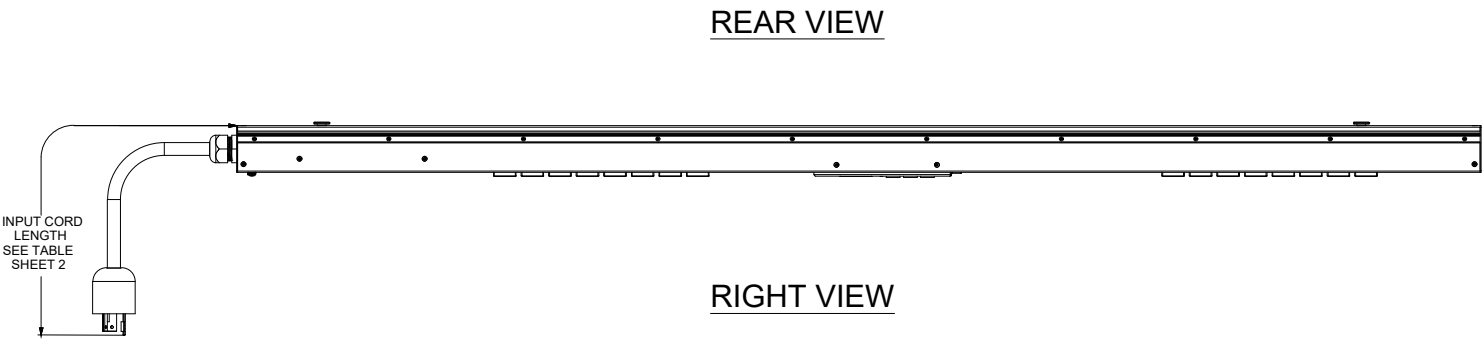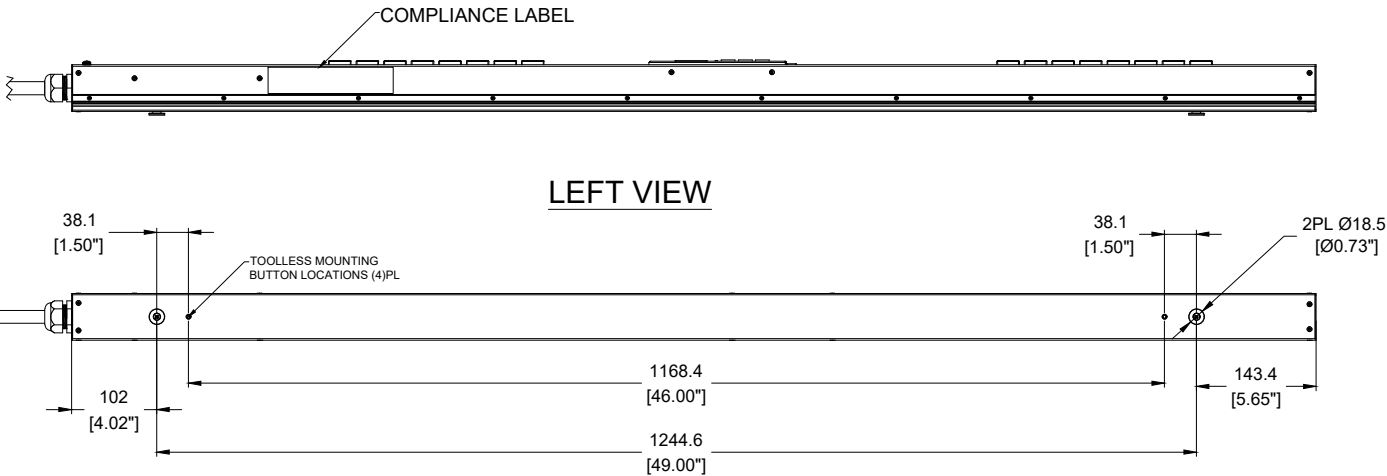

PLUG / RECEPTACLE BLOCK



PLUG
NEMA L5-20P 3W
20A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
20A, 125V MAX RATED OUTPUT

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E16D22M	MI PDU, 20A(16A DERATED), (16)5-20R, NEMA L5-20P 3W-3M, TOP-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	12/08/2025	Mucl	MIM	MJD	INITIAL RELEASE	E16D22M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56					
PART NUMBER		E16D22M		WORK INSTRUCTION		RD-01-02-25					
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01					
TITLE											
INTELLIGENT SERIES PDU E16D22M CONTROL DRAWING											
ITEM REVISION NAME:				PANDUIT							
DATASHEET FILE NAME:											
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:							
				N/A							
				DRAWING NUMBER:				E16D22M_DC			
				DRAWN BY		DATE		CHK		SCALE	
Mucl		12/08/2025		MIM		NONE					
				SHT 2 OF 2		SCALE					
						B					