


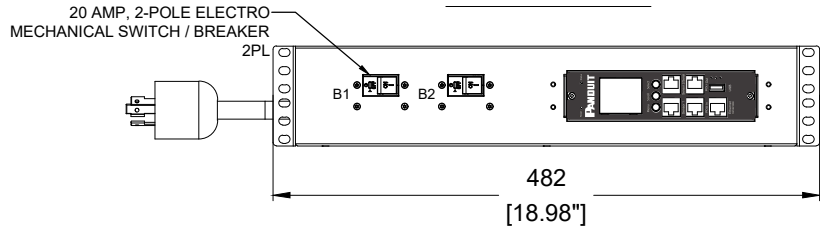


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

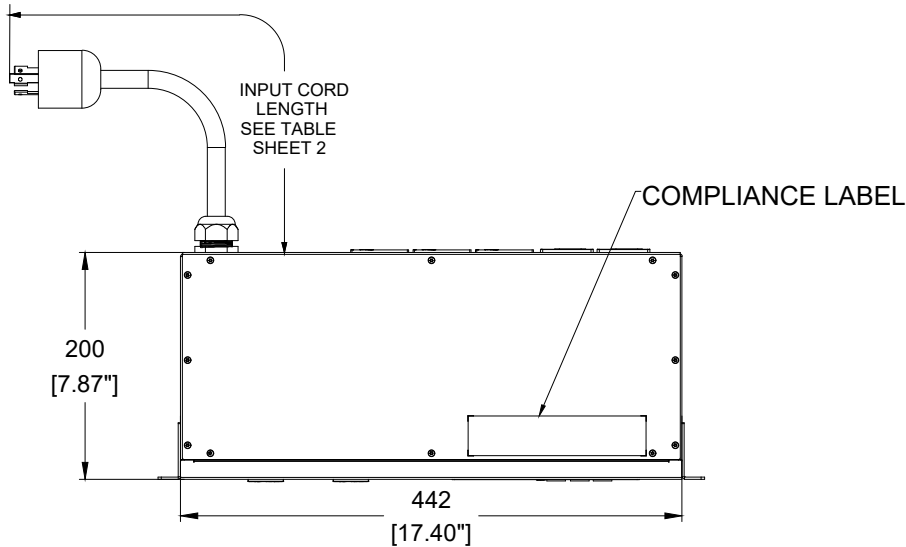


PLUG / RECEPTACLE BLOCK

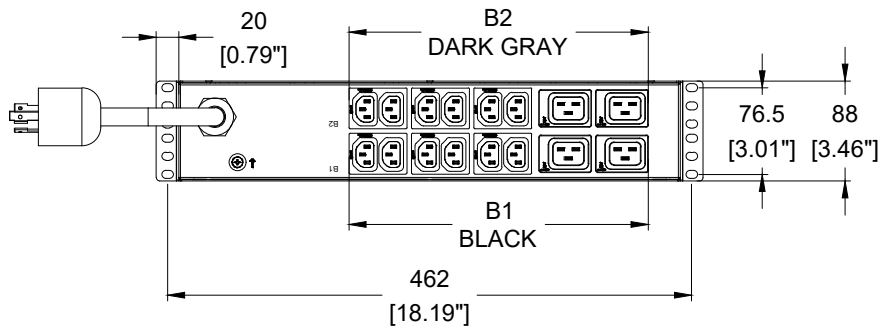

PLUG
NEMA L6-30P 3W
30A, 250VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT



RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT

FRONT VIEW

SIDE VIEW

00A	12/08/2025	Muc1	MIM	MJD	INITIAL RELEASE	E16D14M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

SPECIFICATION:


- STANDARD
UNIT TYPE: MONITORED INPUT
ORIENTATION: HORIZONTAL(2U)
OUTLET QTY & TYPE: (12)C13, (4)C19
INPUT VOLTAGE: 200-240VAC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (2)20AMP, DOUBLE-POLE
INPUT PHASE: SINGLE-PHASE,L-L
RATED POWER: 5 kVA
INPUT PLUG: NEMA L6-30P 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
- ADDITIONAL:
NONE
- ACCESSORIES:
PRODUCT SAFETY WARNING SHEET
QTY: (8) M6 × 12 PAN HEAD MACHINE SCREW
QTY: (8) M6 CAGE NUT

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: E16D14M-XXYZ

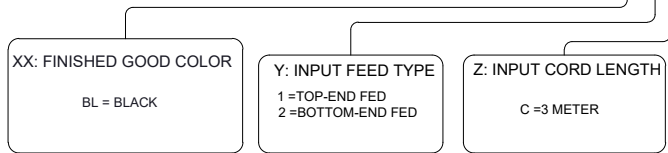

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		2U-200mm	
PART NUMBER		E16D14M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU							
E16D14M							
CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED				MATERIAL/COLOR:			
DIENSIONAL TOLERANCE ARE: mm [IN]				N/A			
Tolerance (mm)							
0<L≤50 ±0.5							
50<L≤250 ±1.0							
250<L≤500 ±1.5							
500<L≤1000 ±2.5							
1000<L≤2000 ±4.0							
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E16D14M_DC			
DRAWN BY		DATE		CHK		SCALE	
Mucl		12/08/2025		MIM		NONE	
SHT 1 OF 2						SCALE	
						B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E16D14M	MI PDU, 30A(24A DERATED), (12)C13 (4)C19, NEMA L6-30P 3W-3M,REAR-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	12/08/2025	Mucl	MIM	MJD	INITIAL RELEASE	E16D14M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		2U-200mm					
PART NUMBER		E16D14M		WORK INSTRUCTION		RD-01-02-25					
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01					
TITLE											
INTELLIGENT SERIES PDU E16D14M CONTROL DRAWING											
ITEM REVISION NAME:				PANDUIT							
DATASHEET FILE NAME:											
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:							
THIRD ANGLE PROJECTION				N/A							
				DRAWING NUMBER:							
				E16D14M_DC							
				DRAWN BY		DATE		CHK		SCALE	
				Mucl		12/08/2025		MIM		NONE	
				SHT 2 OF 2		SCALE					
						B					