




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.




LEFT VIEW

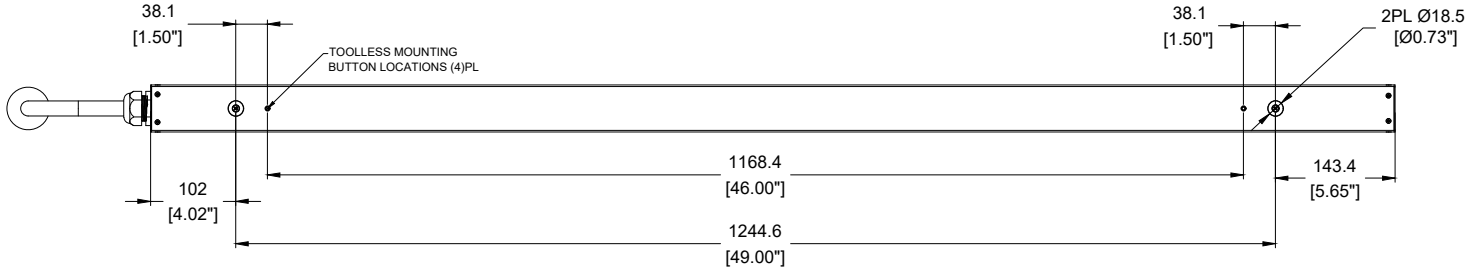


REAR VIEW

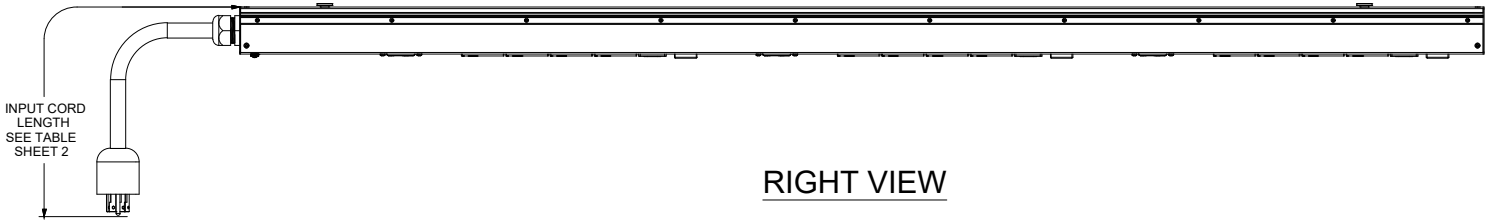

RIGHT VIEW

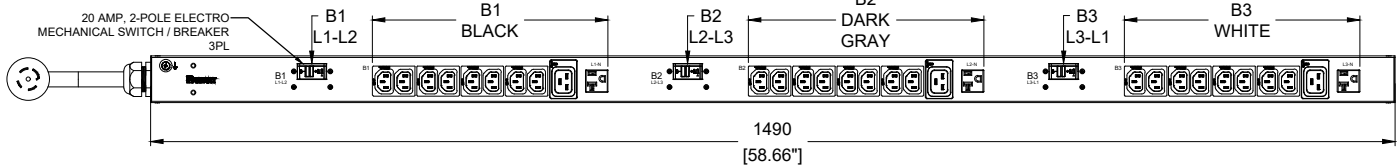

FRONT VIEW



BOTTOM VIEW

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE: BASIC

ORIENTATION: VERTICAL, 0U MID

OUTLET QTY & TYPE: (24)C13, (3)C19, (3)5-20R

INPUT VOLTAGE: 100-120/200-240VAC

INPUT FREQUENCY: 50/60HZ

INPUT CURRENT: 30A(24A DERATED)

BREAKER QTY & TYPE: (3)20AMP, DOUBLE-POLE

INPUT PHASE: 3 PHASE WYE ,L-L,L-N

RATED POWER: 8.6 kVA

INPUT PLUG: NEMA L21-30P 5W

INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE

REGULATORY STANDARD: UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:


PRODUCT SAFETY WARNING SHEET

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: E30B25M-XXYZ

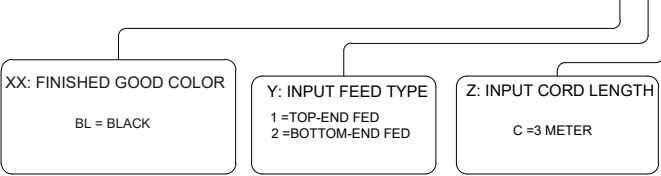


PLUG / RECEPTACLE BLOCK



PLUG
NEMA L21-30P 5W
30A, 208VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT




RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT



RECEPTACLE
5-20R
16A, 125V MAX RATED OUTPUT

00A	12/11/2025	Mucl	MIM	MJD	INITIAL RELEASE	E30B25M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E30B25M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE INTELLIGENT SERIES PDU E30B25M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
				DRAWING NUMBER: E30B25M_DC			
DRAWN BY		DATE	CHK	SCALE		SCALE	
Mucl		02/25/2026	MIM	NONE		SHT 1 OF 2	
						B	

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E30B25M	Basic PDU, 30A(24A DERATED), (24)C13 (3)C13 (3)5-20R, NEMA L21-30P 5W-3M,TOP-FED ,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

2

↓

1

00A	12/11/2025	Mucl	MIM	MJD	INITIAL RELEASE	E30B25M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56					
PART NUMBER		E30B25M		WORK INSTRUCTION		RD-01-02-25					
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01					
TITLE											
INTELLIGENT SERIES PDU E30B25M CONTROL DRAWING											
ITEM REVISION NAME:											
DATASHEET FILE NAME:											
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION  Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:							
				N/A							
				DRAWING NUMBER:				E30B25M_DC			
				DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	02/25/2026	MIM	NONE			B					