

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

MONITORED INPUT
VERTICAL, 0U FULL
(30)C13 , (6)C19
200-240VAC
50/60HZ
30A(24A DERATED)
(3)20AMP, DOUBLE-POLE
3 PHASE DELTA,L-L
8.6 kVA
NEMA L15-30P 4W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:


PRODUCT SAFETY WARNING SHEET

NOTES:




1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E36D08M-XXYZ

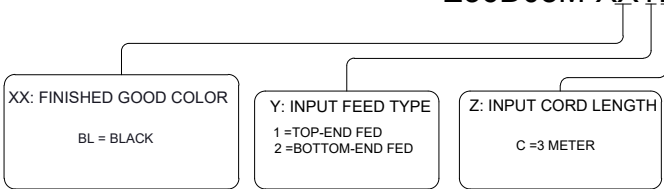


PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1750×55×75	
PART NUMBER		E36D08M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E36D08M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤500±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0 THIRD ANGLE PROJECTION				MATERIAL/COLOR:			
				N/A			
DRAWN BY Mucl DATE 03/13/2026 CHK MIM SCALE NONE				DRAWING NUMBER:			
				E36D08M_DC			
SHT 1 OF 2				SCALE			
				B			

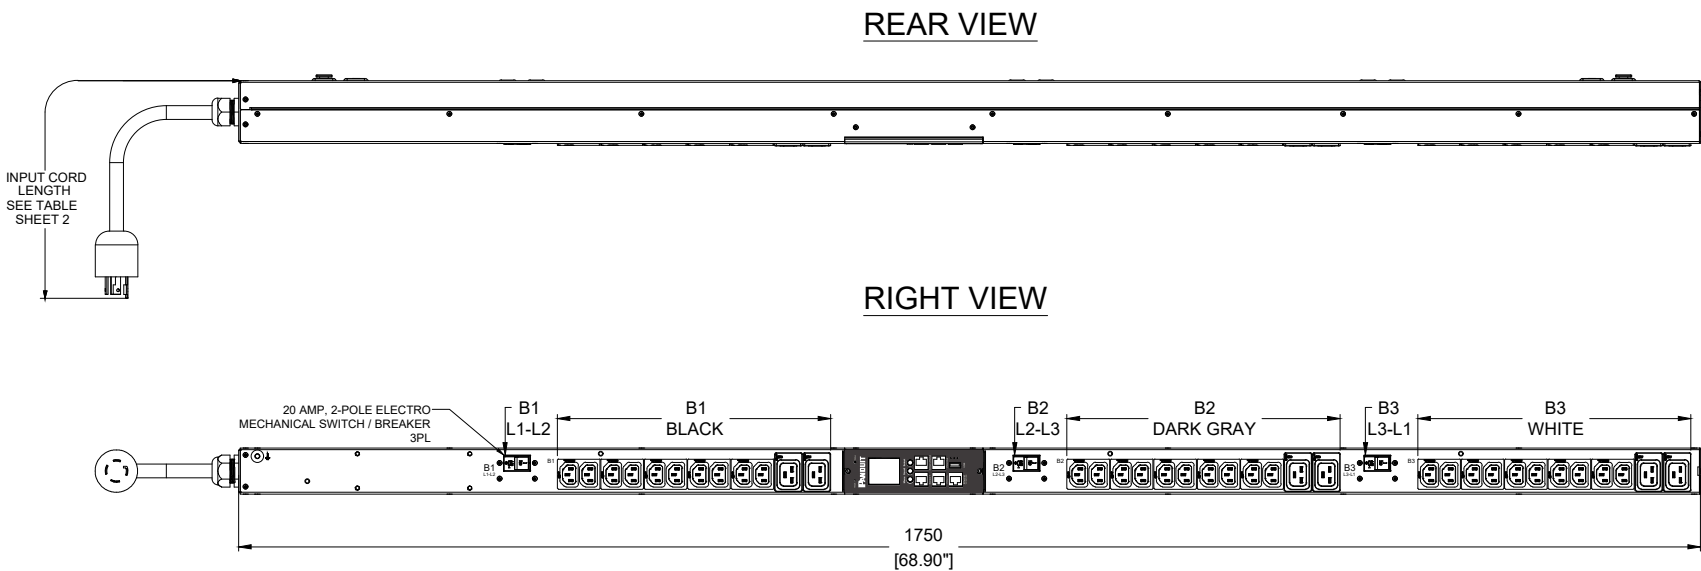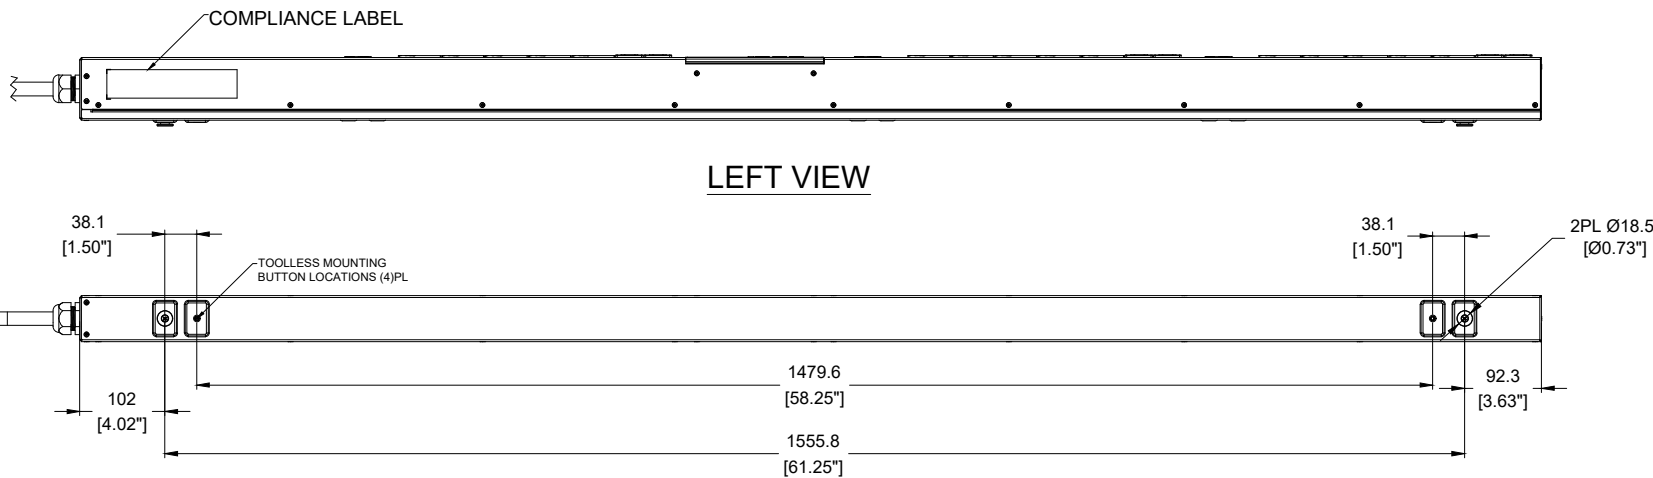


PLUG / RECEPTACLE BLOCK



PLUG
NEMA L15-30P 4W
30A, 208VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT



RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT

00A	03/13/2026	Mucl	MIM	MJD	INITIAL RELEASE	E36D08M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E36D08M	MI PDU, 30A(24A DERATED), (30)C13 (6)C19, NEMA L15-30P 4W-3M,TOP-FED ,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	03/13/2026	Mucl	MIM	MJD	INITIAL RELEASE	E36D08M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1750×55×75	
PART NUMBER		E36D08M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E36D08M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E36D08M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	03/13/2026	MIM	NONE			B	