
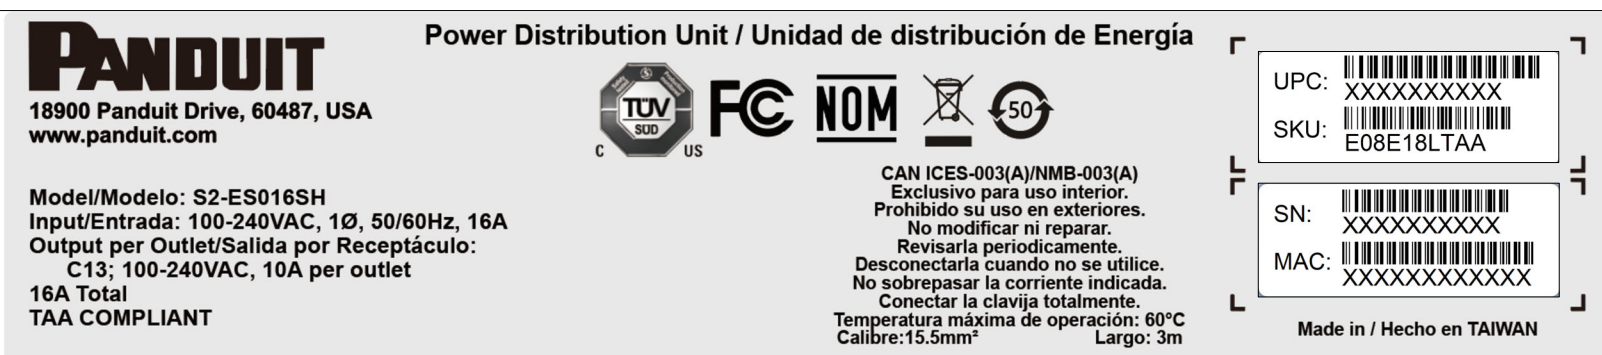
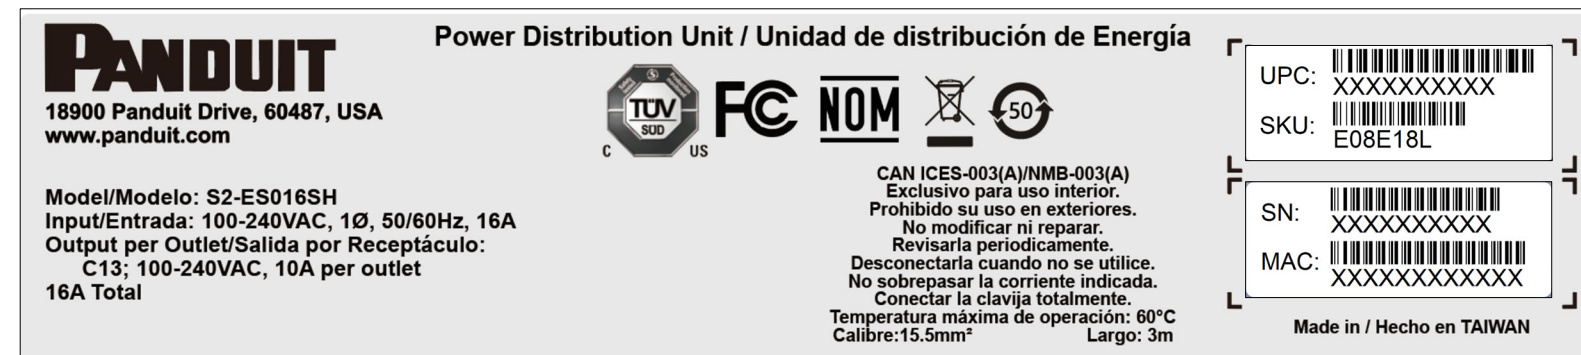
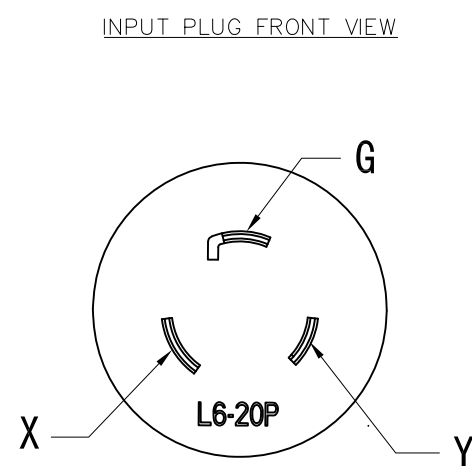
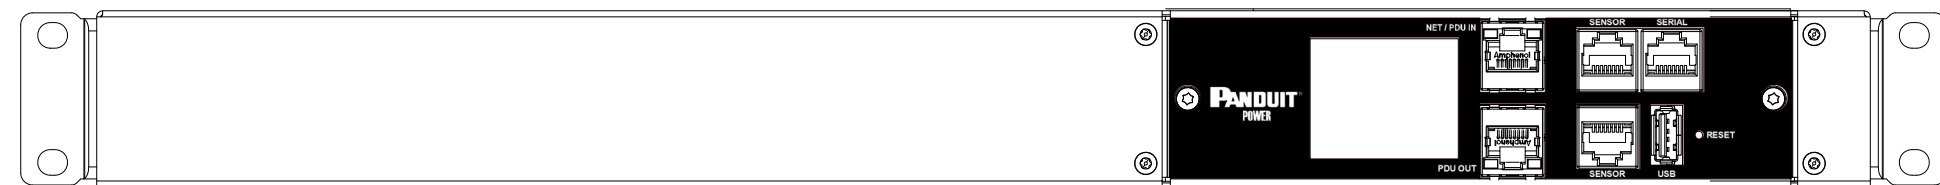
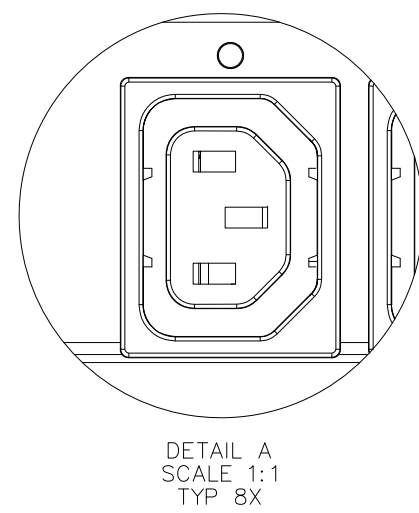
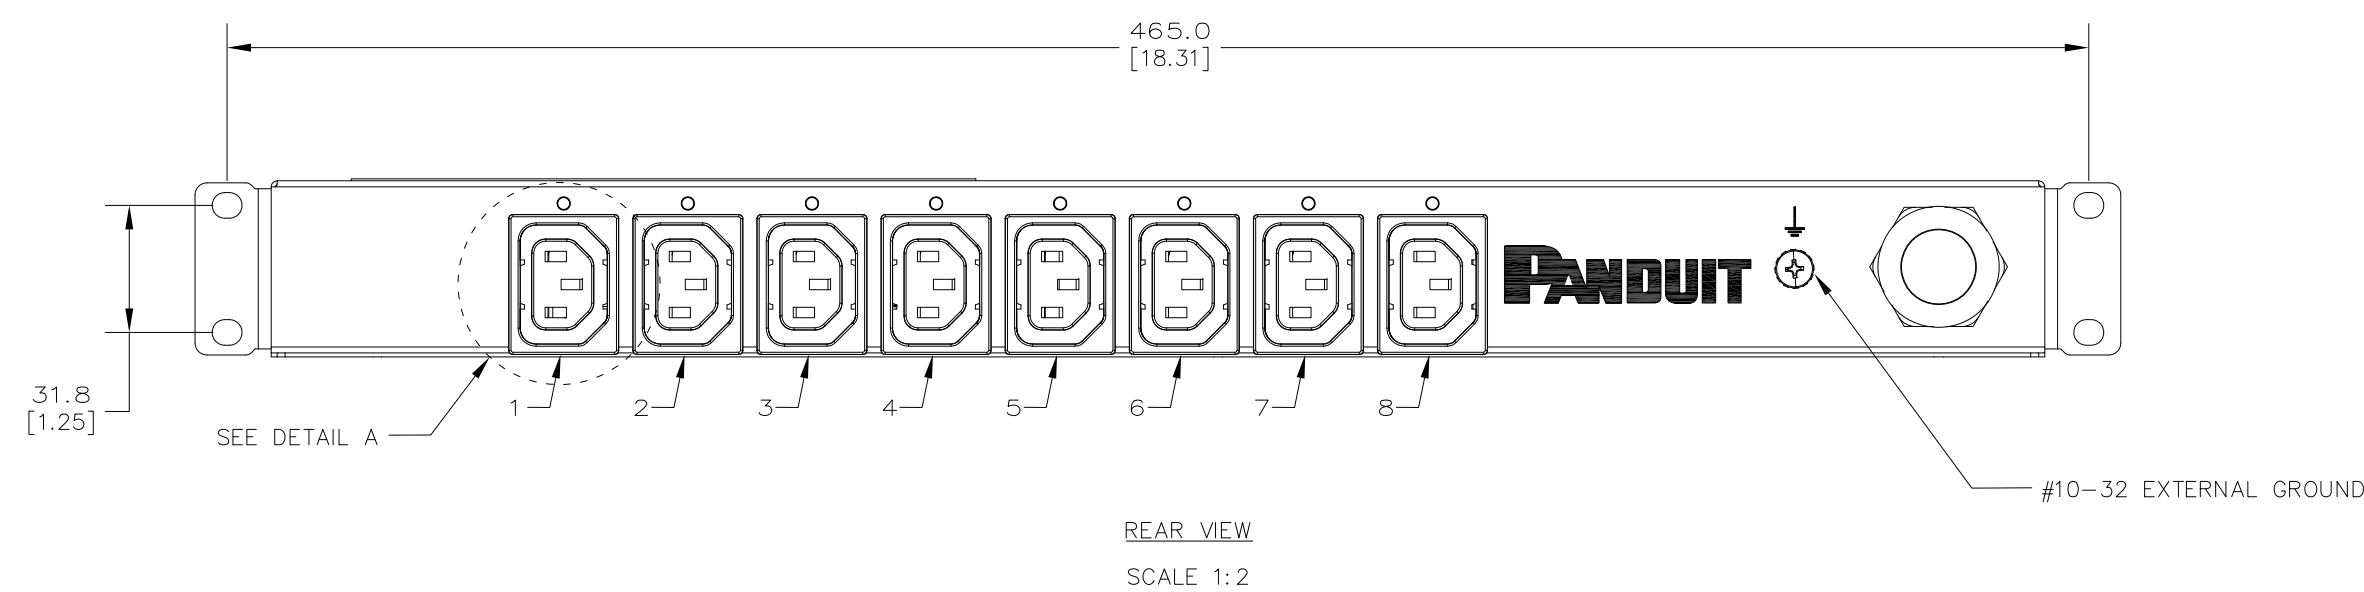
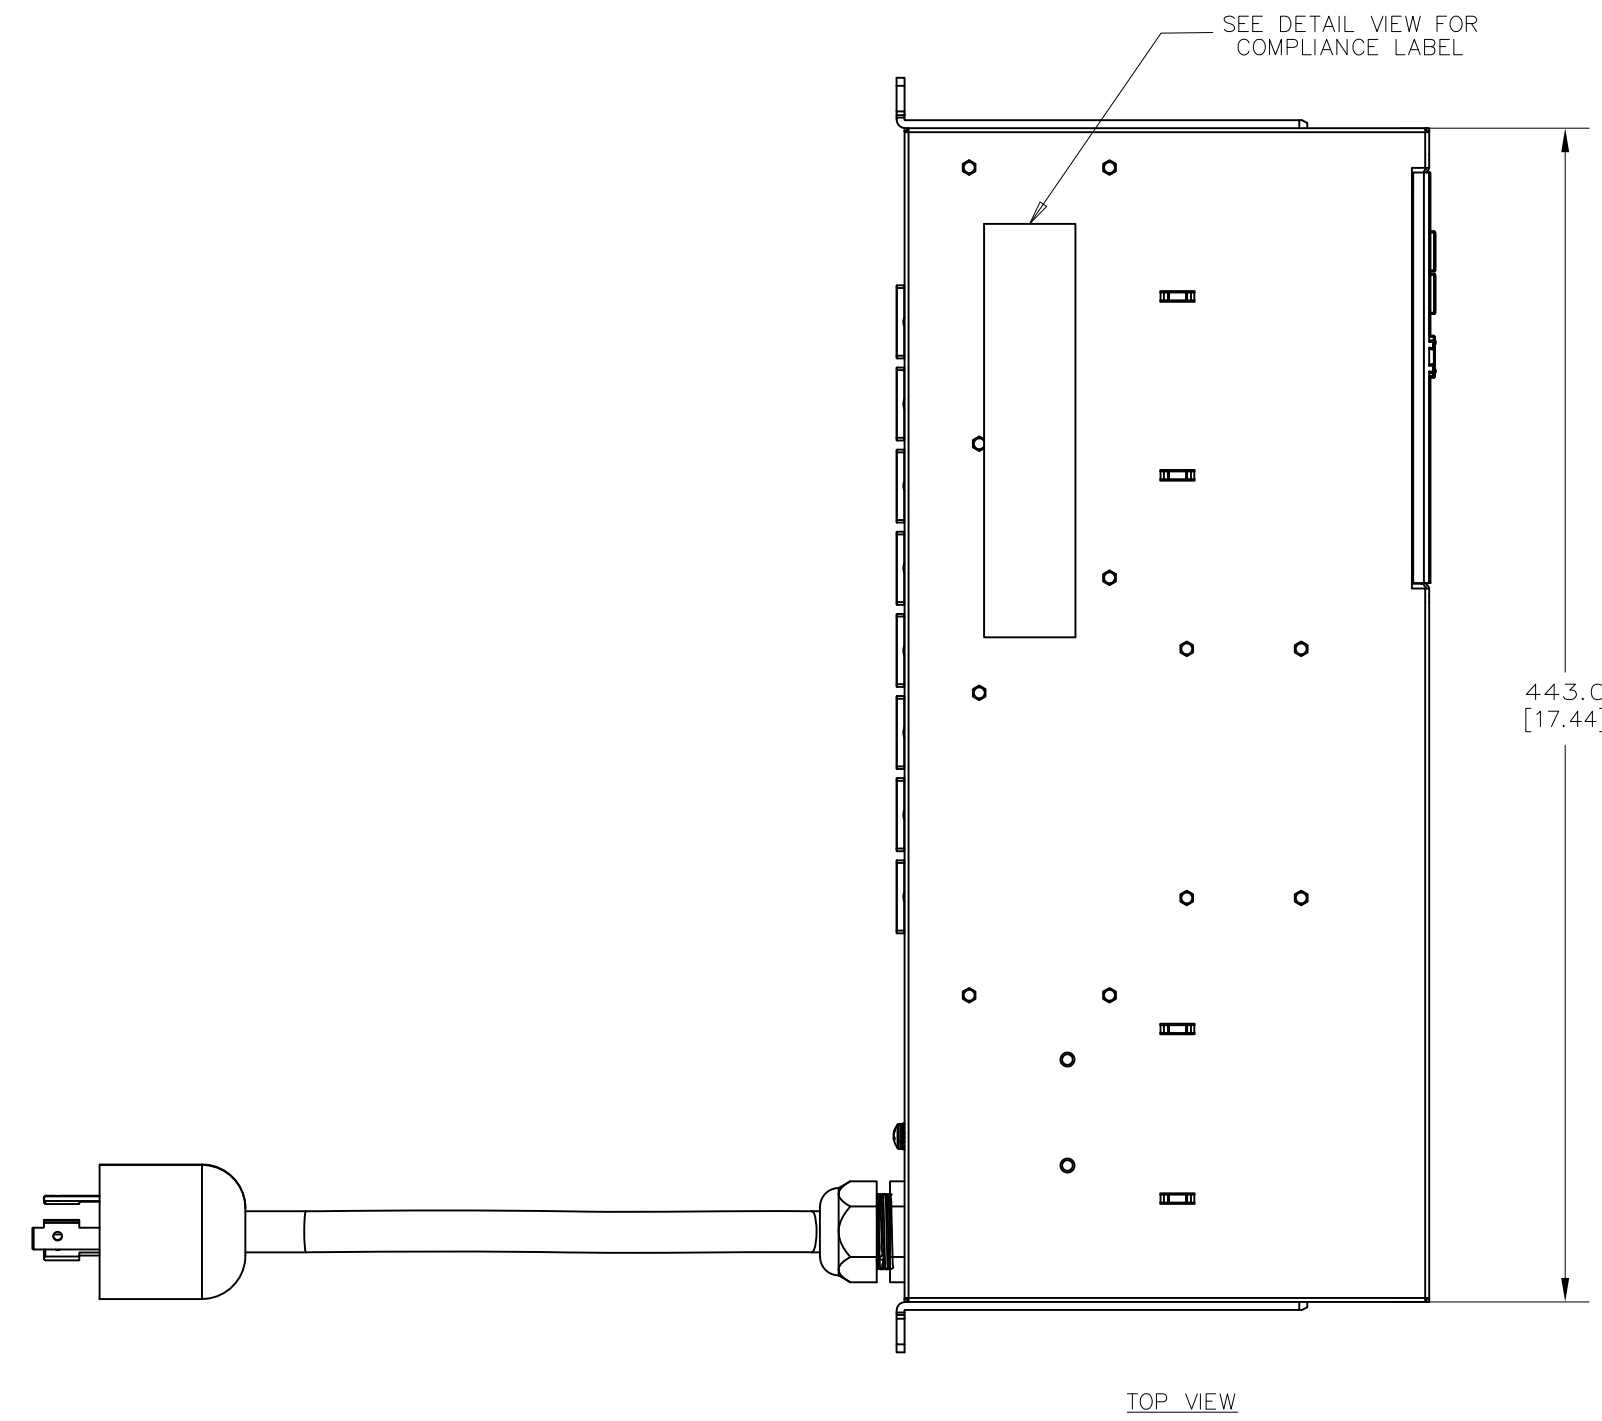


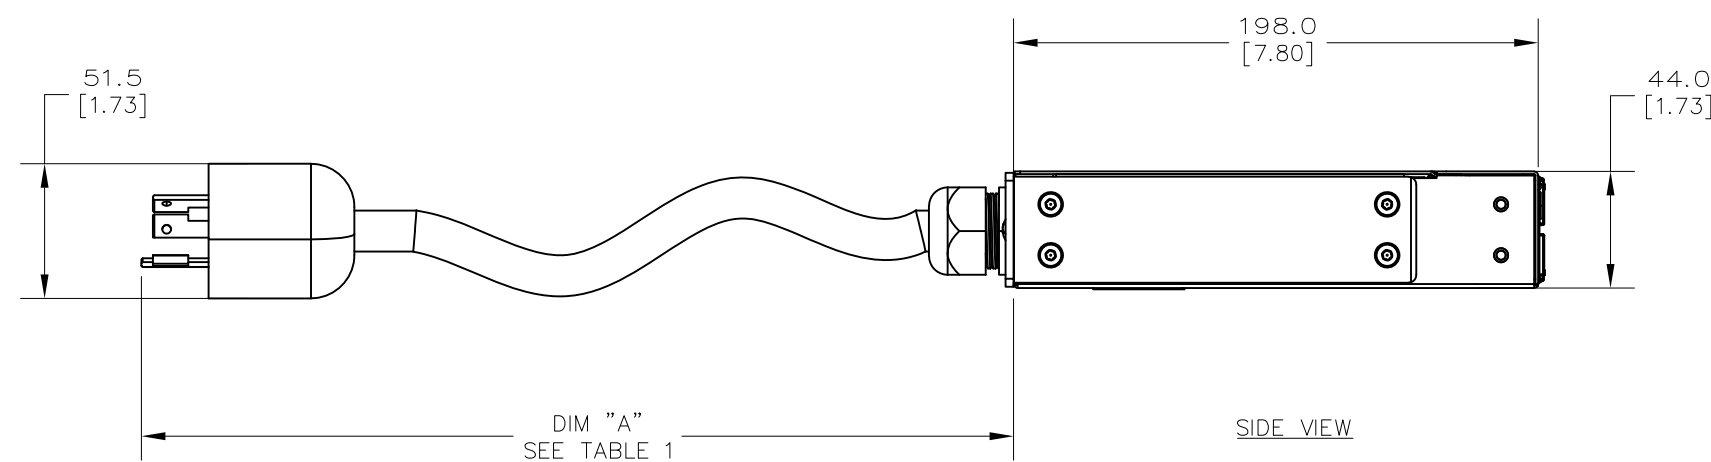

00A	02/03/2026	CHF	CSH	MJD	RELEASE FOR PRODUCTION	E08E18L
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

SPECIFICATION

1. STANDARD:
- | | |
|---------------------|-------------------|
| UNIT TYPE: | MS |
| ORIENTATION: | HORIZONTAL, 1U |
| OUTLET QTY & TYPE: | (8)C13 |
| INPUT VOLTAGE: | 100-240 VAC |
| INPUT CURRENT: | 20A (16A DERATED) |
| BREAKER QTY & TYPE: | / |
| INPUT PHASE: | SINGLE-PHASE, L-L |
| RATED POWER: | 3.3 KVA |
| INPUT PLUG: | NEMA L6-20P 3W |
2. ADDITIONAL:
3. ACCESSORIES:
- PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E08E18L	EL2P MS PDU, 20 AMP, (8)C13, NEMA L6-20P 3W 12AWG S00W	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD
E08E18LTAA	TAA EL2P MS PDU, 20 AMP, (8)C13, NEMA L6-20P 3W 12AWG S00W	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD

FRONT VIEW

SCALE 1:2