

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:


BASIC
VERTICAL, 0U MID
(18)C13
100-120/200-240VAC
50/60HZ
30A(24A DERATED)
(3)20AMP, DOUBLE-POLE
3-PHASE,WYE,L-L
8.6 kVA
NEMA L21-30P 5W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET


NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION


IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E18B24M-XXYZ

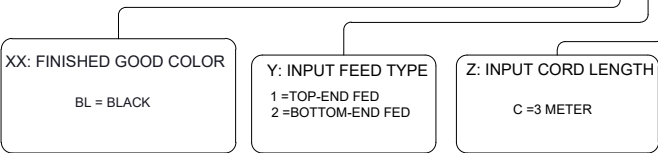


PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56			
PART NUMBER				E18B24M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER				QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE									
INTELLIGENT SERIES PDU									
E18B24M									
CONTROL DRAWING									
ITEM REVISION NAME:									
DATASHEET FILE NAME:									
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) THIRD ANGLE PROJECTION 0<L≤50±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0					MATERIAL/COLOR:				
					N/A				
					DRAWING NUMBER:				
					E18B24M_DC				
DRAWN BY		DATE		CHK		SCALE			
Muc1		12/10/2025		MIM		NONE		SHT 1 OF 2	
								SCALE	
								B	


LEFT VIEW

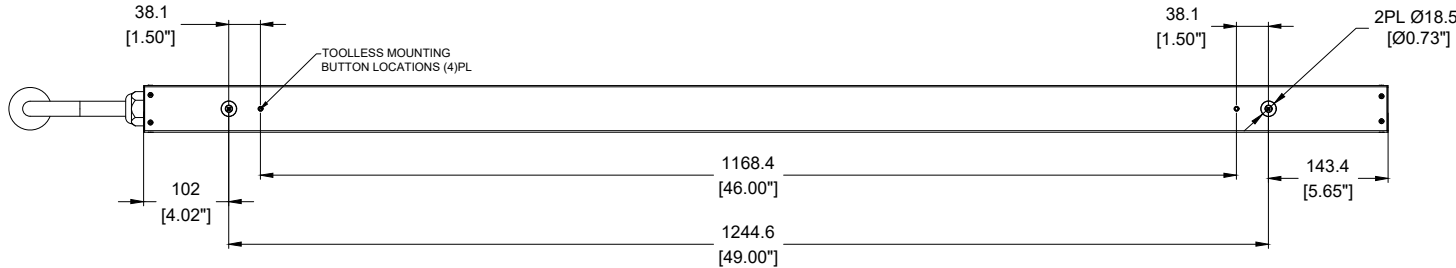


REAR VIEW

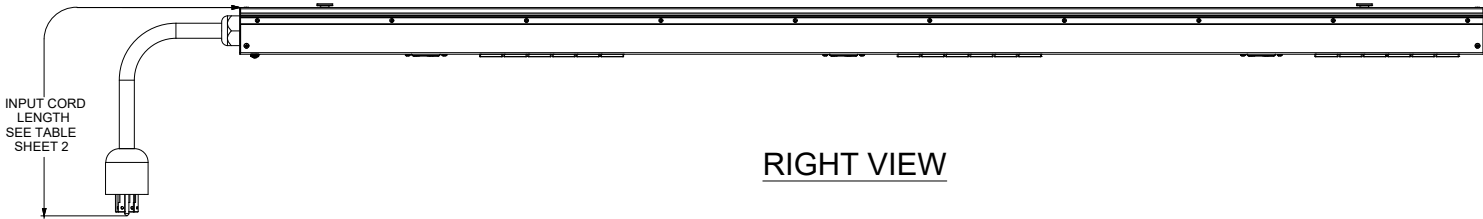

RIGHT VIEW

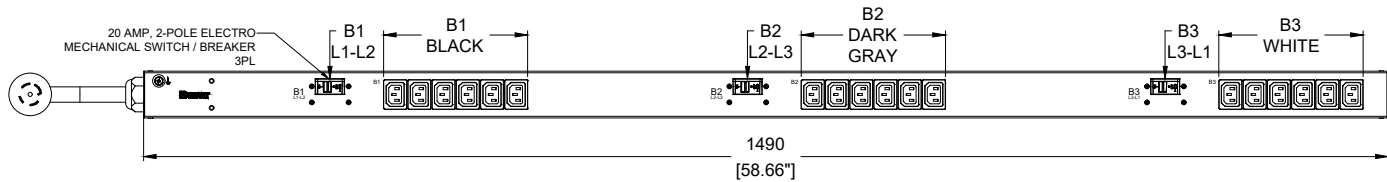

FRONT VIEW




BOTTOM VIEW

PLUG / RECEPTACLE BLOCK



PLUG
NEMA L21-30P 5W
30A, 208VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT

00A	12/10/2025	Muc1	MIM	MJD	INITIAL RELEASE	E18B24M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E18B24M	Basic PDU, 30A(24 DERATED), (18)C13, NEMA L21-30P 5W-3M, TOP-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	12/10/2025	Mucl	MIM	MJD	INITIAL RELEASE	E18B24M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E18B24M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E18B24M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E18B24M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	12/10/2025	MIM	NONE			B	