

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:

ORIENTATION:

OUTLET QTY & TYPE:

INPUT VOLTAGE:

INPUT FREQUENCY:

INPUT CURRENT:

BREAKER QTY & TYPE:

INPUT PHASE:

RATED POWER:

INPUT PLUG:

INPUT POWER CORD:

REGULATORY STANDARD:

BASIC

VERTICAL, 0U HALF

(20)C13, (2)C19

100-120AC

50/60HZ

20A(16A DERATED)

NONE

SINGLE-PHASE,L-N

1.9 kVA

NEMA L5-20P 3W

SEE SHEET 2 PART NUMBER TABLE

UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:


PRODUCT SAFETY WARNING SHEET

NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:


FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E22B05M-XXYZ

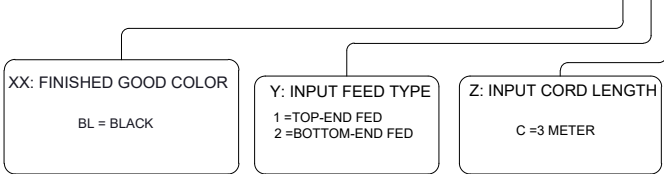


PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		800×56×56	
PART NUMBER		E22B05M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E22B05M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) THIRD ANGLE PROJECTION 0<L≤50±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0				MATERIAL/COLOR:			
				N/A			
				DRAWING NUMBER:			
				E22B05M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 2		SCALE	
Muc1	04/09/2026	MIM	NONE			B	




LEFT VIEW

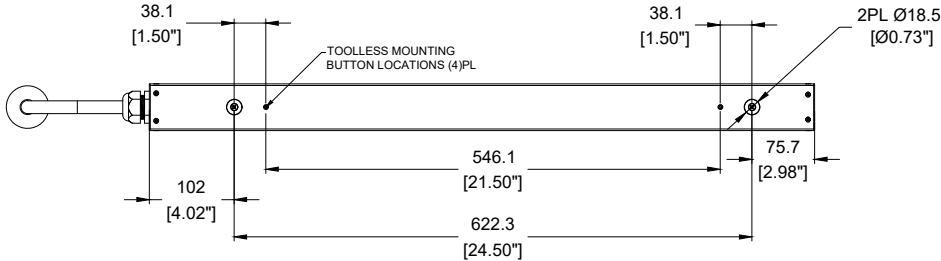


REAR VIEW

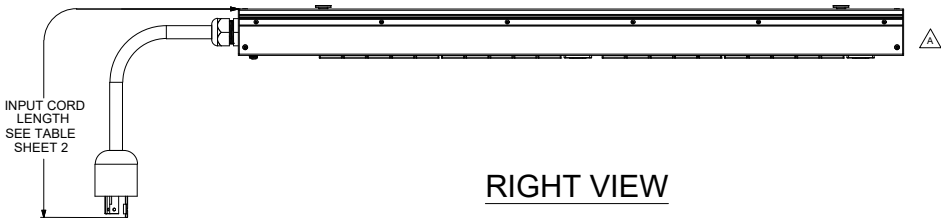

RIGHT VIEW

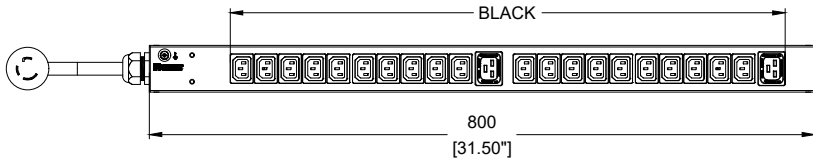

FRONT VIEW




BOTTOM VIEW


PLUG / RECEPTACLE BLOCK



PLUG
NEMA L5-20P 3W
20A, 125VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT



RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT

00A	04/09/2026	Muc1	MIM	MJD	INITIAL RELEASE	E22B05M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E22B10M	BASIC, 20A(16A DERATED), (20)C13 (2)C19, NEMA L5-20P 3W-3M,TOP-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	04/09/2026	Mucl	MIM	MJD	INITIAL RELEASE	E22B05M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		800×56×56	
PART NUMBER		E22B05M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE INTELLIGENT SERIES PDU E22B05M CONTROL DRAWING							
ITEM REVISION NAME:				PANDUIT			
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR: N/A			
				DRAWING NUMBER: E22B05M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	04/09/2026	MIM	NONE			B	