

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD

UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:

MONITORED INPUT
VERTICAL, 0U FULL
(12)C13 , (12)C19
200-240VAC
50/60HZ
60A(48A DERATED)
(6)20AMP, DOUBLE-POLE
3 PHASE DELTA,L-L
17.3 kVA
IEC 60309 3P+E 9H 63A (IP44)
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:

NONE
3. ACCESSORIES:

PRODUCT SAFETY WARNING SHEET


NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION


IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E24D34M-XXYZ


XX: FINISHED GOOD COLOR BL = BLACK	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH C =3 METER
---------------------------------------	---	------------------------------------

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1750×55×75	
PART NUMBER		E24D34M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU							
E24D34M							
CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED				MATERIAL/COLOR:			
DIENSIONAL TOLERANCE ARE: mm [IN]				N/A			
Tolerance (mm)							
0<L≤50 ±0.5							
50<L≤250 ±1.0							
250<L≤500 ±1.5							
500<L≤1000 ±2.5							
1000<L≤2000 ±4.0							
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E24D34M_DA			
DRAWN BY		DATE		CHK		SCALE	
Mucl		03/13/2026		MIM		NONE	
SHT 1 OF 3						SCALE	
						B	


LEFT VIEW

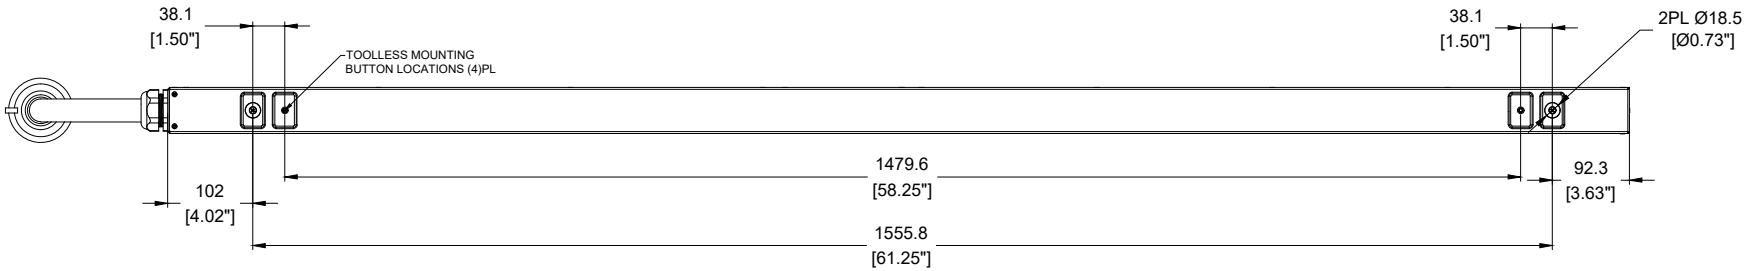


REAR VIEW

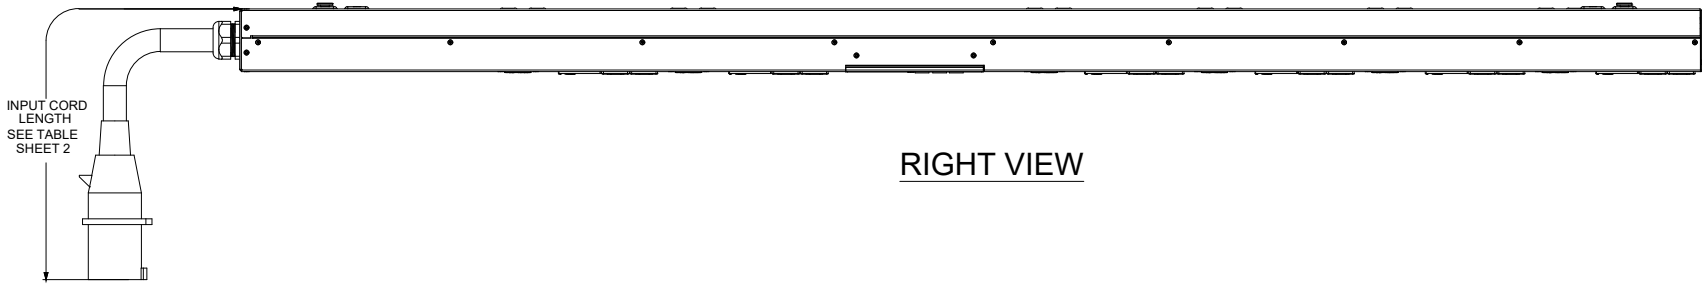

RIGHT VIEW

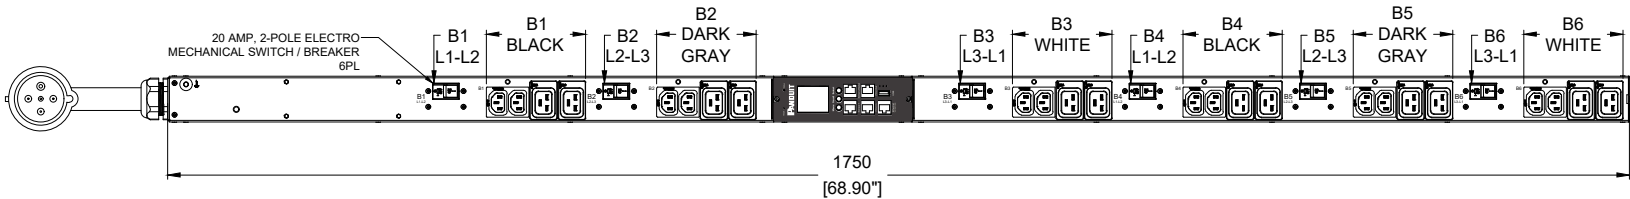


FRONT VIEW




BOTTOM VIEW


PLUG / RECEPTACLE BLOCK



PLUG
IEC 60309 3P+E 9H
IP44 (SPLASHPROOF)
63A, 230VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT



RECEPTACLE
IEC 60320 C19
16A, 240V MAX RATED OUTPUT

00A	03/13/2026	Mucl	MIM	MJD	INITIAL RELEASE	E24D34M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E24D34M	MI PDU, 60A(48A DERATED), (12)C13 (12)C19, IEC 60309 3P+E 9H IP44-3M,TOP-FED ,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	03/13/2026	Mucl	MIM	MJD	INITIAL RELEASE	E24D34M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1750×55×75	
PART NUMBER		E24D34M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E24D34M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0				MATERIAL/COLOR:			
				N/A			
 THIRD ANGLE PROJECTION				DRAWING NUMBER:			
				E24D34M_DA			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 3		SCALE	
Mucl	03/13/2026	MIM	NONE			B	