

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:

1. STANDARD
- UNIT TYPE:
ORIENTATION:
OUTLET QTY & TYPE:
INPUT VOLTAGE:
INPUT FREQUENCY:
INPUT CURRENT:
BREAKER QTY & TYPE:
INPUT PHASE:
RATED POWER:
INPUT PLUG:
INPUT POWER CORD:
REGULATORY STANDARD:


BASIC
VERTICAL, 0U MID
(20)C13
200-240VAC
50/60HZ
30A(24A DERATED)
(2)20AMP, DOUBLE-POLE
SINGLE-PHASE,L-L
5 KVA
NEMA L6-30P 3W
SEE SHEET 2 PART NUMBER TABLE
UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET


NOTES:


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL,STATE,AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:




FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E20B16M-XXYZ

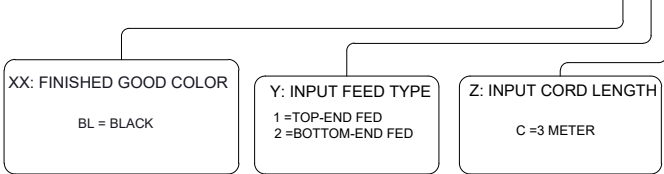

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E20B16M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E20B16M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) THIRD ANGLE PROJECTION 0<L≤50±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0				MATERIAL/COLOR:			
				N/A			
				DRAWING NUMBER:			
				E20B16M_DC			
DRAWN BY		DATE		CHK		SCALE	
Mucl		03/042026		MIM		NONE	
SHT 1 OF 2						SCALE B	

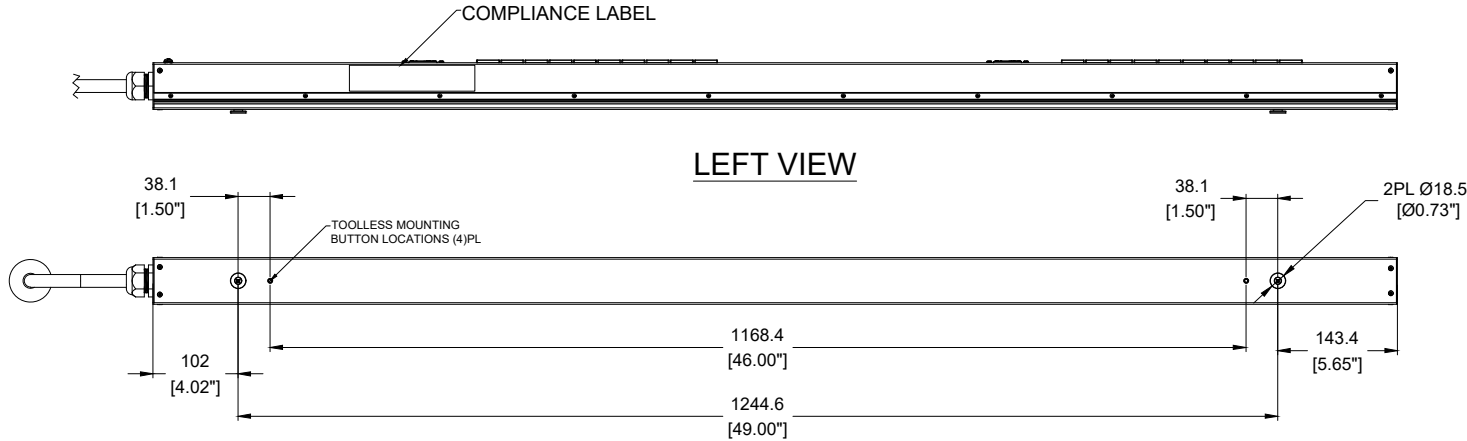


REAR VIEW

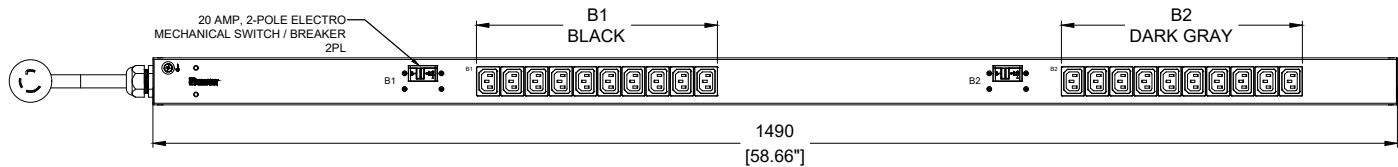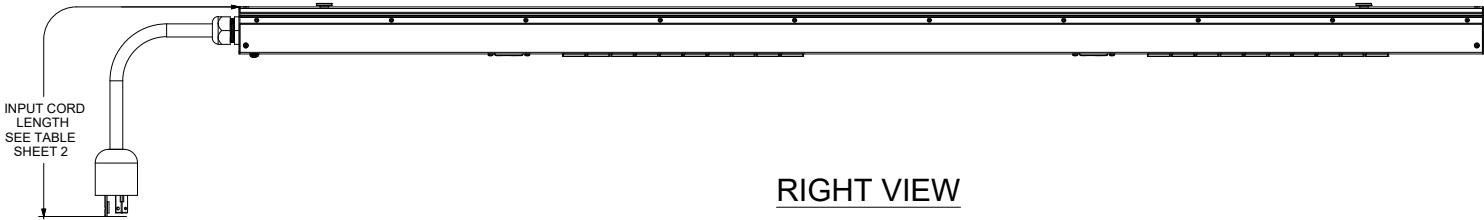

PLUG / RECEPTACLE BLOCK



PLUG
NEMA L6-30P 3W
30A, 250VAC MAX RATED INPUT



RECEPTACLE
IEC 60320 C13
10A, 240V MAX RATED OUTPUT

00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E20B16M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E20B16M	BASIC PDU, 30A(24A DERATED), (20)C13, NEMA L6-30P 3W-3M,TOP-FED, BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

2

↓

1

00A	03/04/2026	Mucl	MIM	MJD	INITIAL RELEASE	E20B16M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E20B16M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E20B16M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] THIRD ANGLE PROJECTION Tolerance (mm) 0<L≤50±0.5 50<L≤250±1.0 250<L≤500±1.5 500<L≤1000±2.5 1000<L≤2000±4.0				MATERIAL/COLOR:			
				N/A			
				DRAWING NUMBER:			
				E20B16M_DC			
DRAWN BY	DATE	CHK	SCALE	SHT 2 OF 2		SCALE	
Mucl	03/04/2026	MIM	NONE			B	