



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

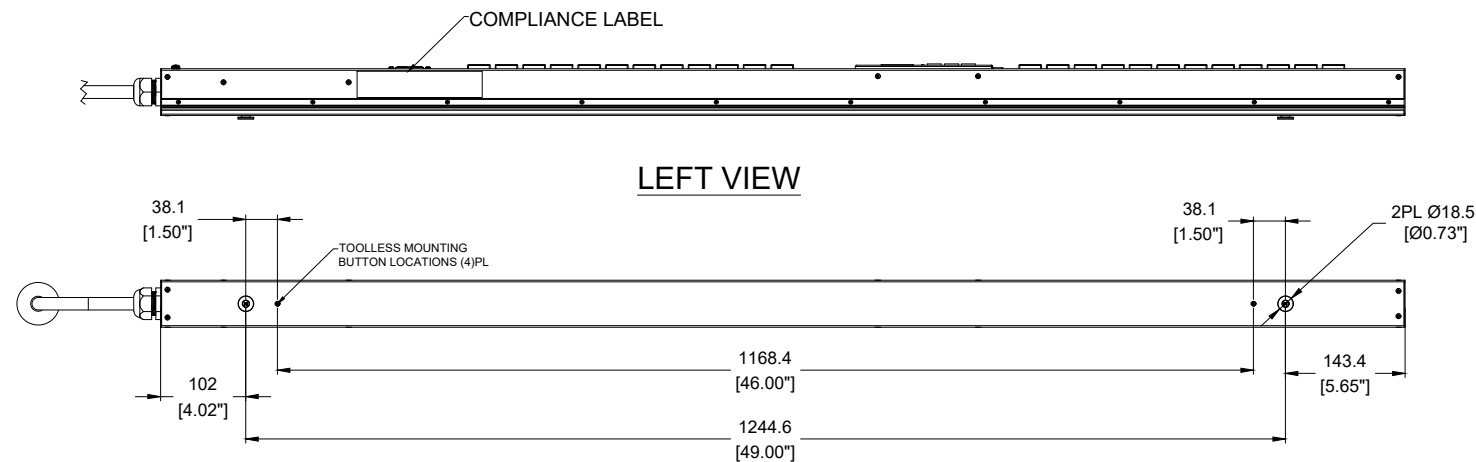


LEFT VIEW

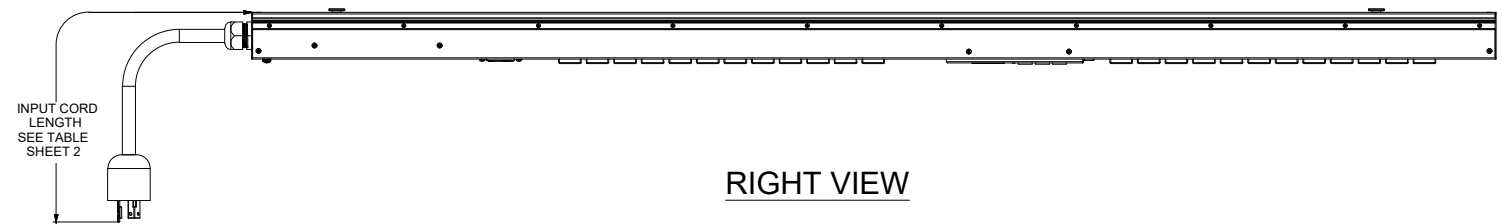

RIGHT VIEW



FRONT VIEW



BOTTOM VIEW

PLUG / RECEPTACLE BLOCK



PLUG
NEMA L5-30P 3W
30A, 125VAC MAX RATED INPUT



RECEPTACLE
5-20R
16A, 125V MAX RATED OUTPUT

00A	12/10/2025	Mucl	MIM	MJD	INITIAL RELEASE	E24D23M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PANDUIT P/N	WEIGHT
SEE SHEET 2	SEE SHEET 2

SPECIFICATION:


1. STANDARD
UNIT TYPE: MONITORED INPUT
ORIENTATION: VERTICAL, 0U MID
OUTLET QTY & TYPE: (24)5-20R
INPUT VOLTAGE: 100-120AC
INPUT FREQUENCY: 50/60HZ
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (2)20AMP, SINGLE-POLE
INPUT PHASE: SINGLE-PHASE,L-N
RATED POWER: 2.9 kVA
INPUT PLUG: NEMA L5-30P 3W
INPUT POWER CORD: SEE SHEET 2 PART NUMBER TABLE
REGULATORY STANDARD: UL 498 COMPLIANT
2. ADDITIONAL:
NONE
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET


NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS.
SECONDARY DIMENSIONS ARE IN [INCHES]
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE
NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM
FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR
USE WITH THIS PART
4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER
MANUAL
5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP
END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE
SHEET 2 CONFIGURABLE PART NUMBERS: E24D23M-XXYZ

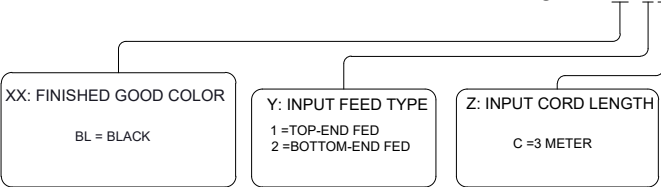

PROJECT SPEC		SPS-EDI-611		PACKAGING SPEC		1490×56×56	
PART NUMBER		E24D23M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE INTELLIGENT SERIES PDU E24D23M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance (mm) 0<L≤50 ±0.5 50<L≤250 ±1.0 250<L≤500 ±1.5 500<L≤1000 ±2.5 1000<L≤2000 ±4.0  THIRD ANGLE PROJECTION				MATERIAL/COLOR: N/A			
DRAWING BY: Mucl DATE: 12/10/2025 CHK: MIM SCALE: NONE				DRAWING NUMBER: E24D23M_DC			
				SHT 1 OF 2 SCALE B			

2


↑

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
E24D23M	MI PDU, 30A(24A DERATED) (24)5-20R, NEMA L5-30P 3W-3M, TOP-FED,BLACK	BLACK(RAL 9005)	3M(+254MM/-127MM)[10'(+10"/-5")]	TBD

00A	12/10/2025	Mucl	MIM	MJD	INITIAL RELEASE	E24D23M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

PROJECT SPEC		SPS-EDI-611		PACKGING SPEC		1490×56×56	
PART NUMBER		E24D23M		WORK INSTRUCTION		RD-01-02-25	
INSPECTION INSTRUCTION NUMBER		QA-SIP-03		FMEA & CONTROL PLAN		PFMEA-P-01 CP-P-01	
TITLE							
INTELLIGENT SERIES PDU E24D23M CONTROL DRAWING							
ITEM REVISION NAME:							
DATASHEET FILE NAME:							
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]				MATERIAL/COLOR:			
 THIRD ANGLE PROJECTION				N/A			
				DRAWING NUMBER:			
				E24D23M_DC			
				SCALE			
				NONE			
DRAWN BY		DATE		CHK		SCALE	
Mucl		12/10/2025		MIM		SHT 2 OF 2	
						SCALE	
						B	