




LEFT VIEW

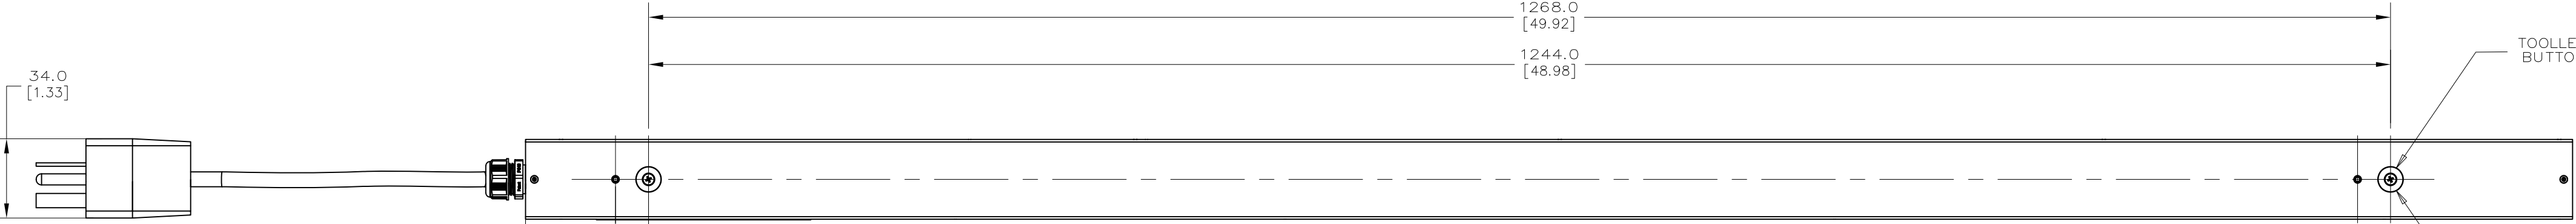


REAR VIEW

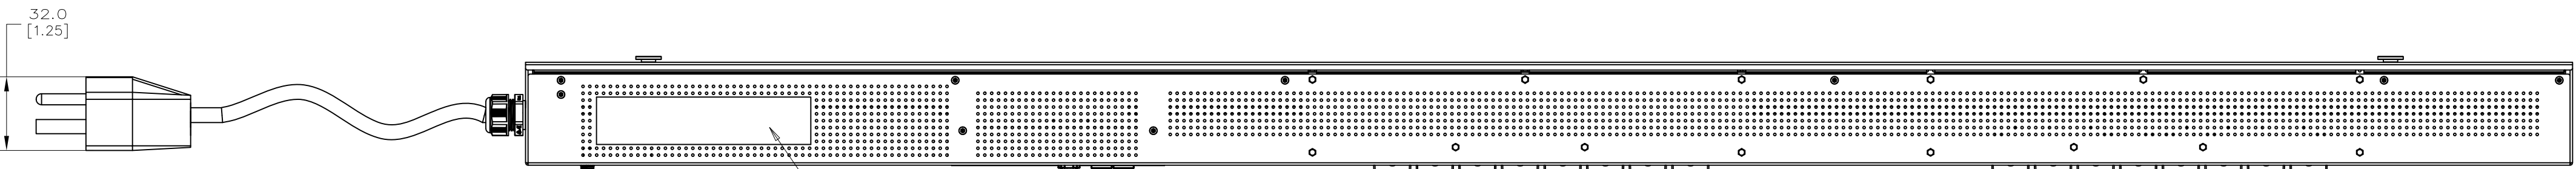


RIGHT VIEW

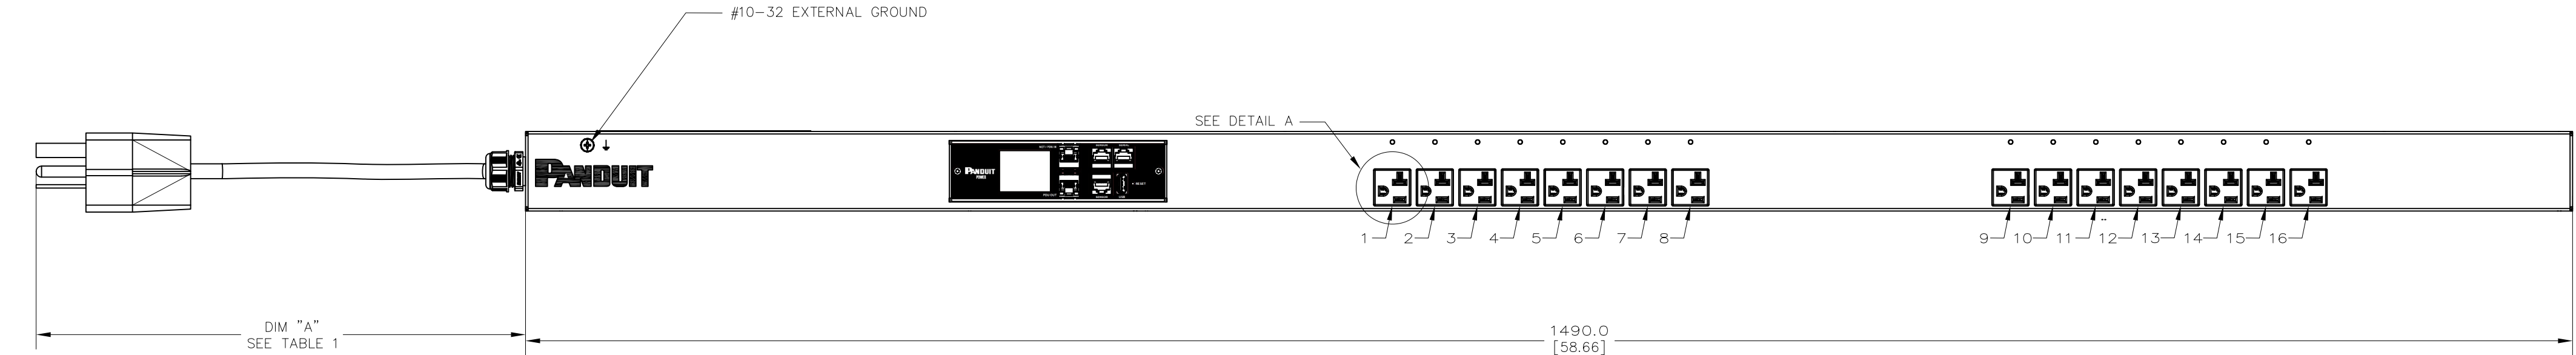

FRONT VIEW

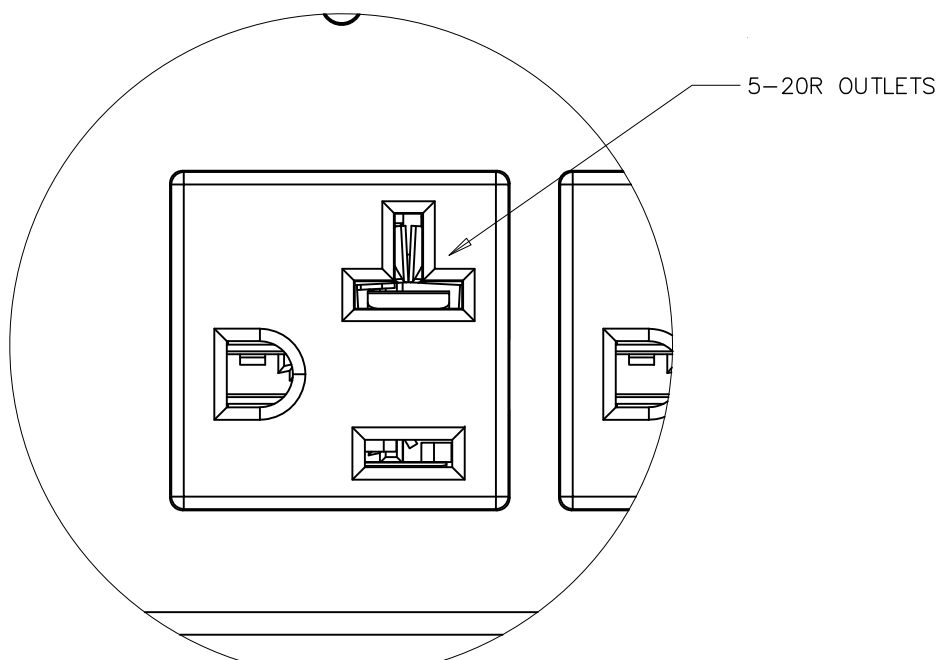

DETAIL A
SCALE 1:1
TYP 24X

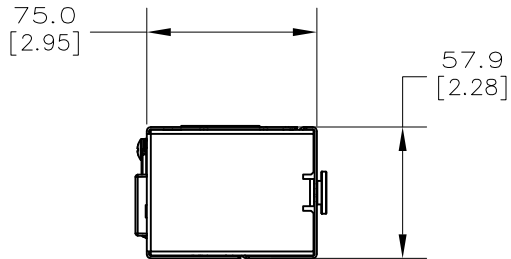

BOTTOM VIEW

SPECIFICATION

- STANDARD:
 - UNIT TYPE: MS
 - ORIENTATION: VERTICAL, OU MID
 - OUTLET QTY & TYPE: (16)5-20R
 - INPUT VOLTAGE: 100-120VAC
 - INPUT CURRENT: 20A (16A DERATED)
 - BREAKER QTY & TYPE: /
 - INPUT PHASE: SINGLE-PHASE, L-N
 - RATED POWER: 1.9 KVA
 - INPUT PLUG: NEMA 5-20P 3W
- ADDITIONAL:
- ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET


NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
- HEXAGONS ARE USED FOR COMMUNICATION PURPOSES. CIRCLES ARE USED FOR CRITICAL DIMENSIONS. TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS. SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E16E21L	EL2P MS PDU, 16 AMP, (16)5-20R, NEMA 5-20P 3W 12AWG SJT	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD
E16E21LTAA	TAA EL2P MS PDU, 16 AMP, (16)5-20R, NEMA 5-20P 3W 12AWG SJT	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD

INPUT PLUG FRONT VIEW

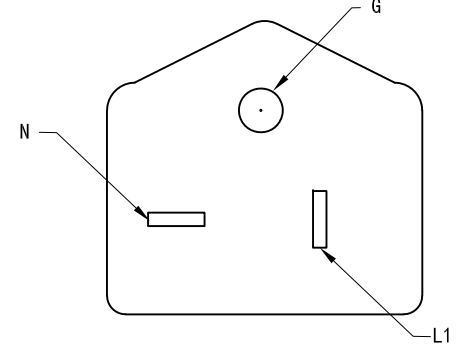

COMPLIANCE LABEL VIEW



00A	11/26/2025	CHF	CSH	MJD	RELEASE FOR PRODUCTION	E16E21L
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

DRAWN BY	DATE	CHK	SCALE	THIRD ANGLE PROJECTION	DRAWING NUMBER	SIZE
CHF	11/26/2025	CSH	3:10	THIRD ANGLE PROJECTION	E16E21L-DC	D

TITLE		CUSTOMER DRAWING	
E16E21L		E16E21L-00	
ITEM REVISION NAME		E16E21L-DC/00A	
DATABASE FILE NAME		E16E21L-DC/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]		MATERIAL	
NOT APPLICABLE		NOT APPLICABLE	
DRAWING NUMBER		E16E21L-DC	
SHT 1 OF 1		SIZE	