THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

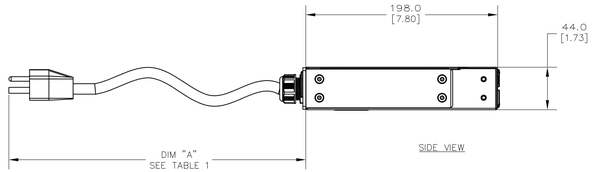

SIDE VIEW

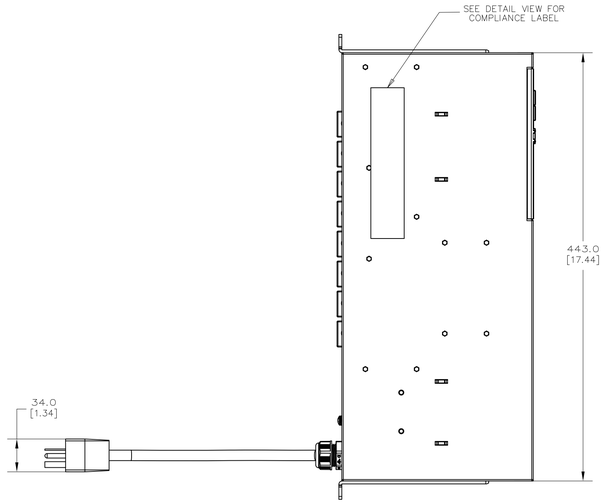

TOP VIEW

SPECIFICATION

1. STANDARD:

UNIT TYPE:	MS
ORIENTATION:	HORIZONTAL, 1U
OUTLET QTY & TYPE:	(8)5–20R
INPUT VOLTAGE:	100–120VAC
INPUT CURRENT:	20A (16A DERATED)
BREAKER QTY & TYPE:	/
INPUT PHASE:	SINGLE–PHASE, L–N
RATED POWER:	1.9 KVA
INPUT PLUG:	NEMA 5–20P 3W

2. ADDITIONAL:

3. ACCESSORIES:
   PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (–XX)	SHIPPING WEIGHT (KG)
E08E15L	EL2P MS PDU, 20 AMP, (8)5–20R, NEMA 5–20P 3W 12AWG SJT	3000 +178/–89 [118.1 +7/–3.5]	BLACK (RAL 9005)	TBD
E08E15LTAA	TAA EL2P MS PDU, 20 AMP, (8)5–20R, NEMA 5–20P 3W 12AWG SJT	3000 +178/–89 [118.1 +7/–3.5]	BLACK (RAL 9005)	

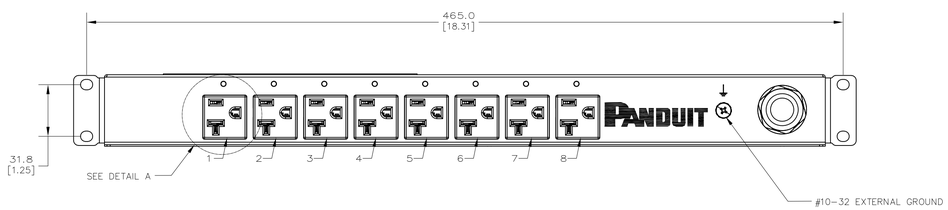

REAR VIEW

SCALE 1:2

FRONT VIEW

SCALE 1:2



DETAIL A
SCALE 1:1
TYP 8X

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	02/03/2026	CHF	CSH	MJD	RELEASE FOR PRODUCTION	E08E15L

TITLE: E08E15L

CUSTOMER DRAWING

ITEM REVISION NAME: E08E15L/00

DATASET FILE NAME: E08E15L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]
INCH: ±.03
MILLIMETER: ±0.8
ANGLE: ±1
MINLENG: ±1
MAXLENG: ±1
THIRD ANGLE PROJECTION

MATERIAL: NOT APPLICABLE

DRAWING NUMBER: E08E15L-DC

DRAWN BY	DATE	CHK	SCALE	SIZE
CHF	02/03/2026	CSH	3:10	D

SHT 1 OF 1

D1010020/7.6