


SPECIFICATION


1. STANDARD:
 - UNIT TYPE: MS
 - ORIENTATION: VERTICAL, 0U MID
 - OUTLET QTY & TYPE: (12)C13/C15, (12)C13/C15/C19/C12
 - INPUT VOLTAGE: 200~240VAC
 - INPUT CURRENT: 30A(24A DERATED)
 - BREAKER QTY & TYPE: (3) 20AMP, DOUBLE-POLE
 - INPUT PHASE: 3 PHASE DELTA, L-L
 - RATED POWER: 8.6 KVA
 - INPUT PLUG: NEMA L15-30P 4W
 - REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
3. ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

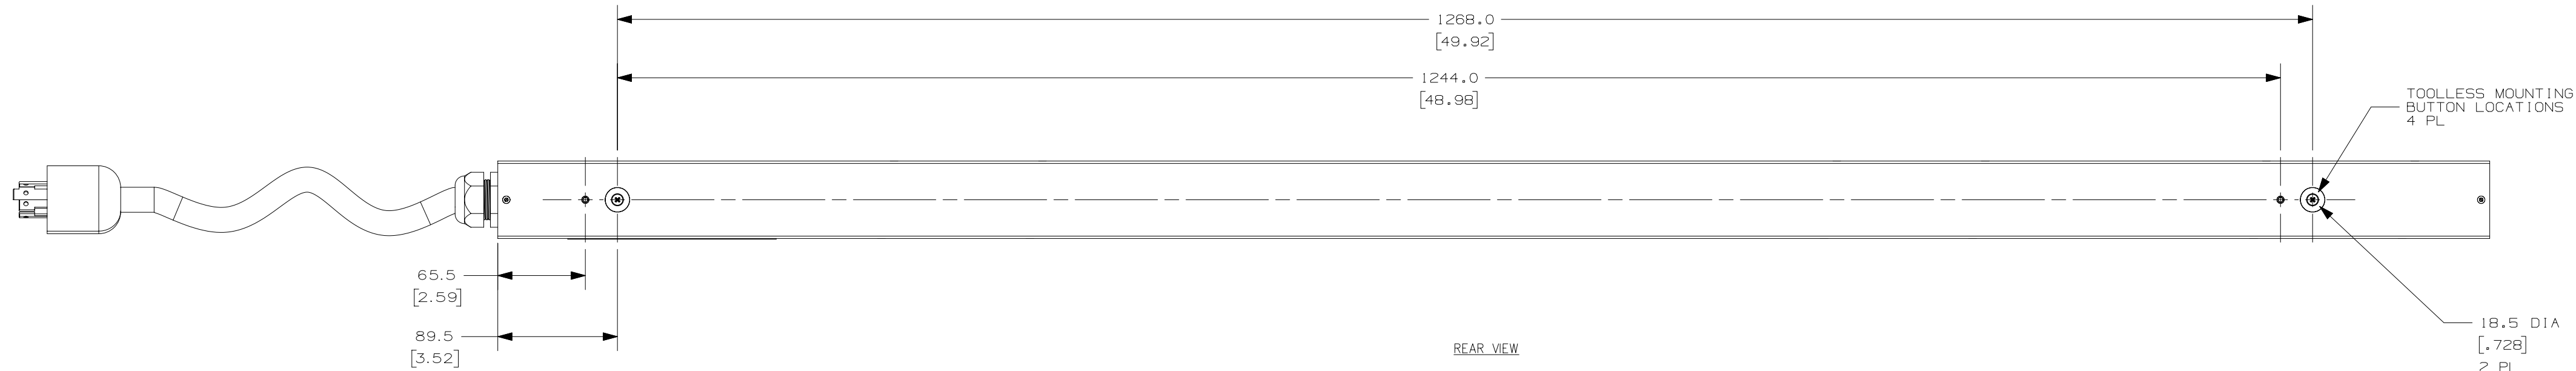


REAR VIEW

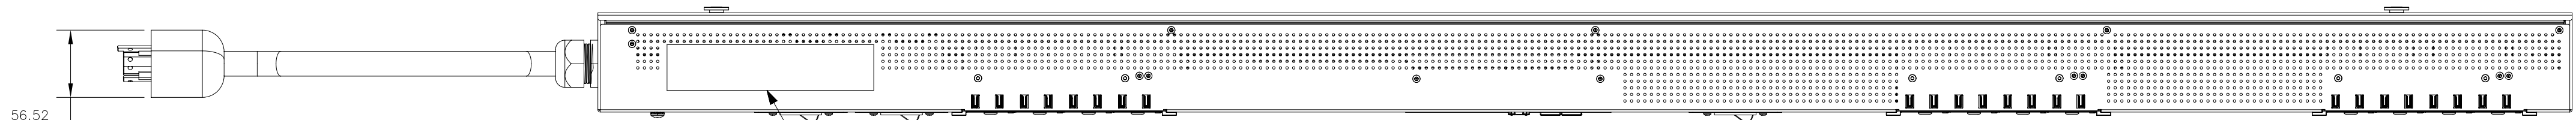


SEE DETAIL VIEW FOR COMPLIANCE LABEL


RIGHT VIEW

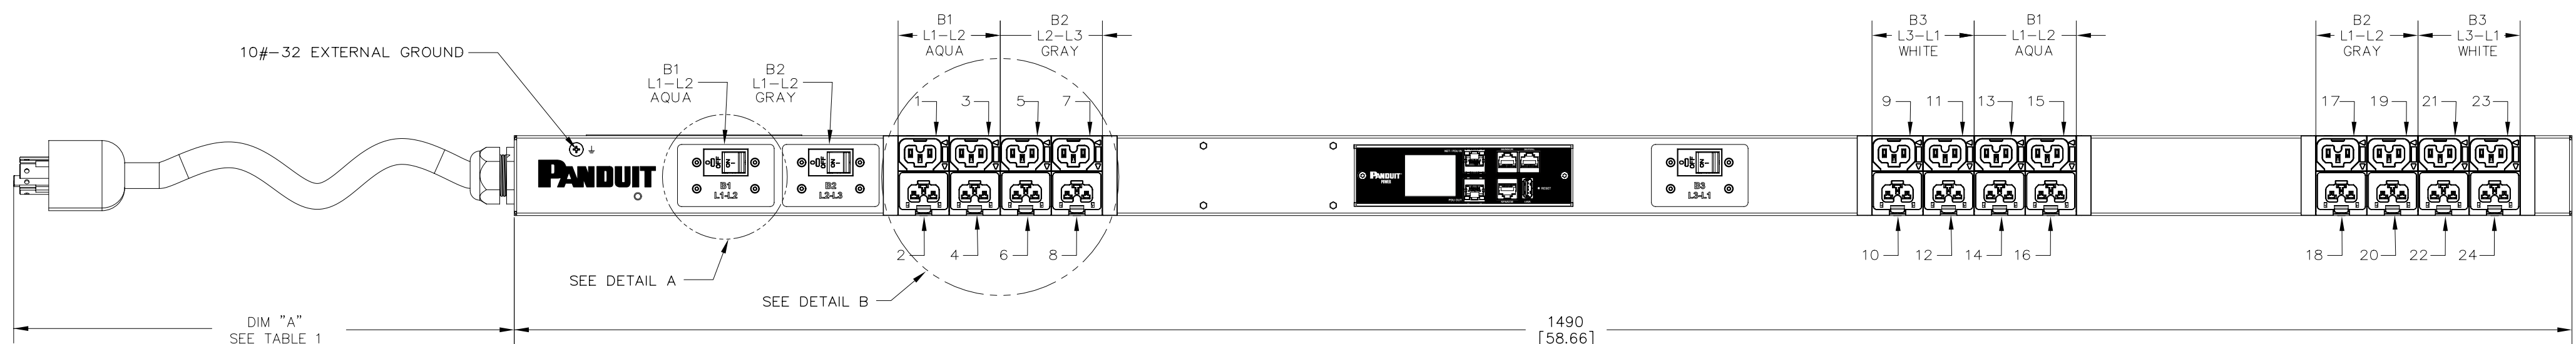


FRONT VIEW

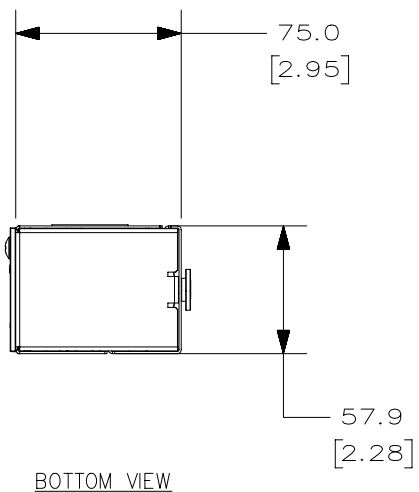

BOTTOM VIEW

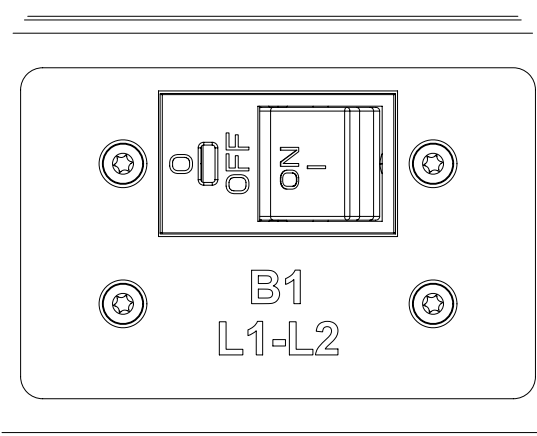

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 3X



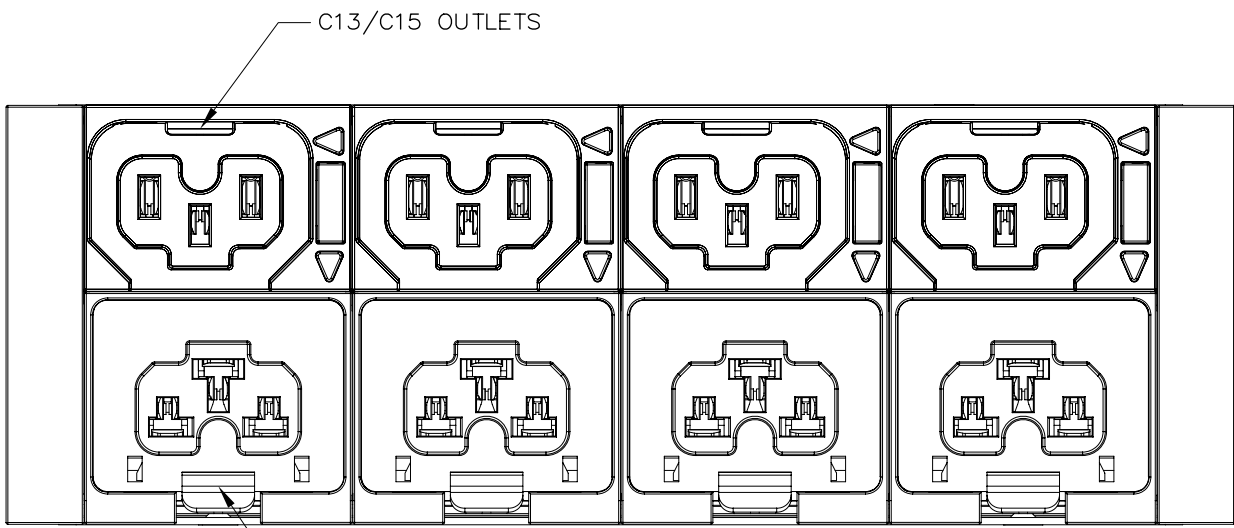


— C13/C15/C19/C21 OUTLETS

DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E24E29L	EL2P MS PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L15-30P-3M ,BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	TBD
E24E29LTAA	TAA EL2P MS PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L15-30P-3M ,BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	TBD

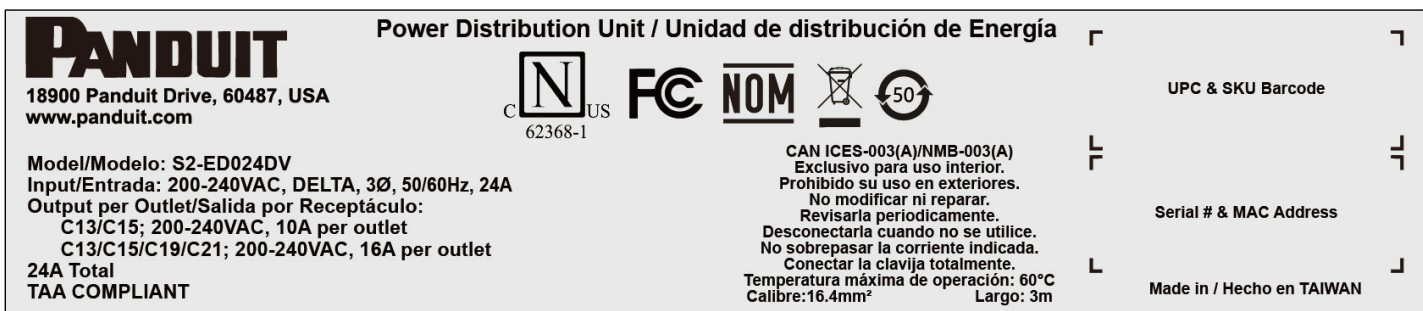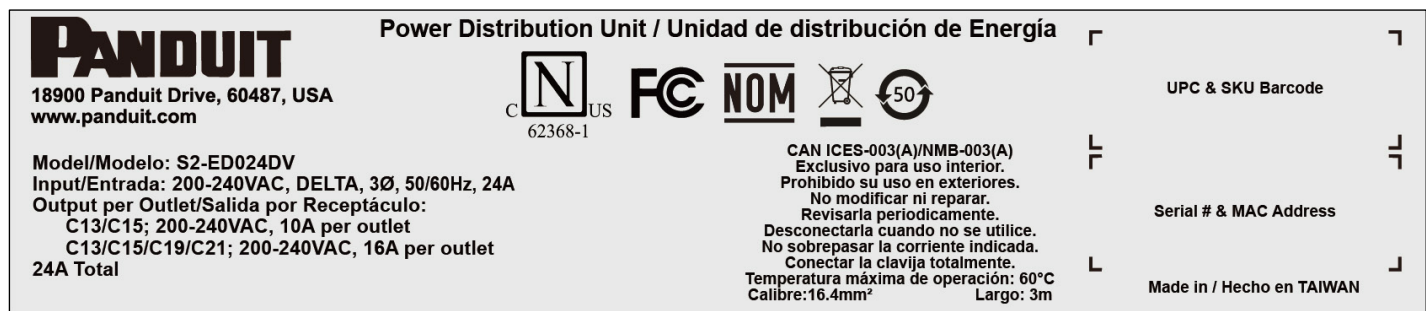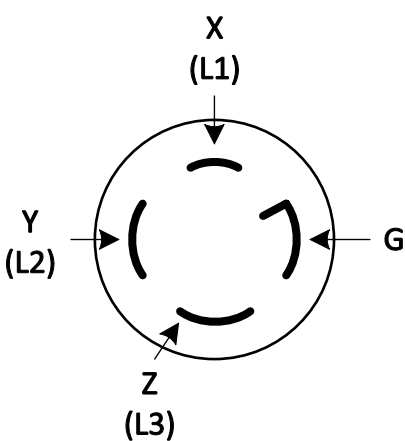[illegible]