

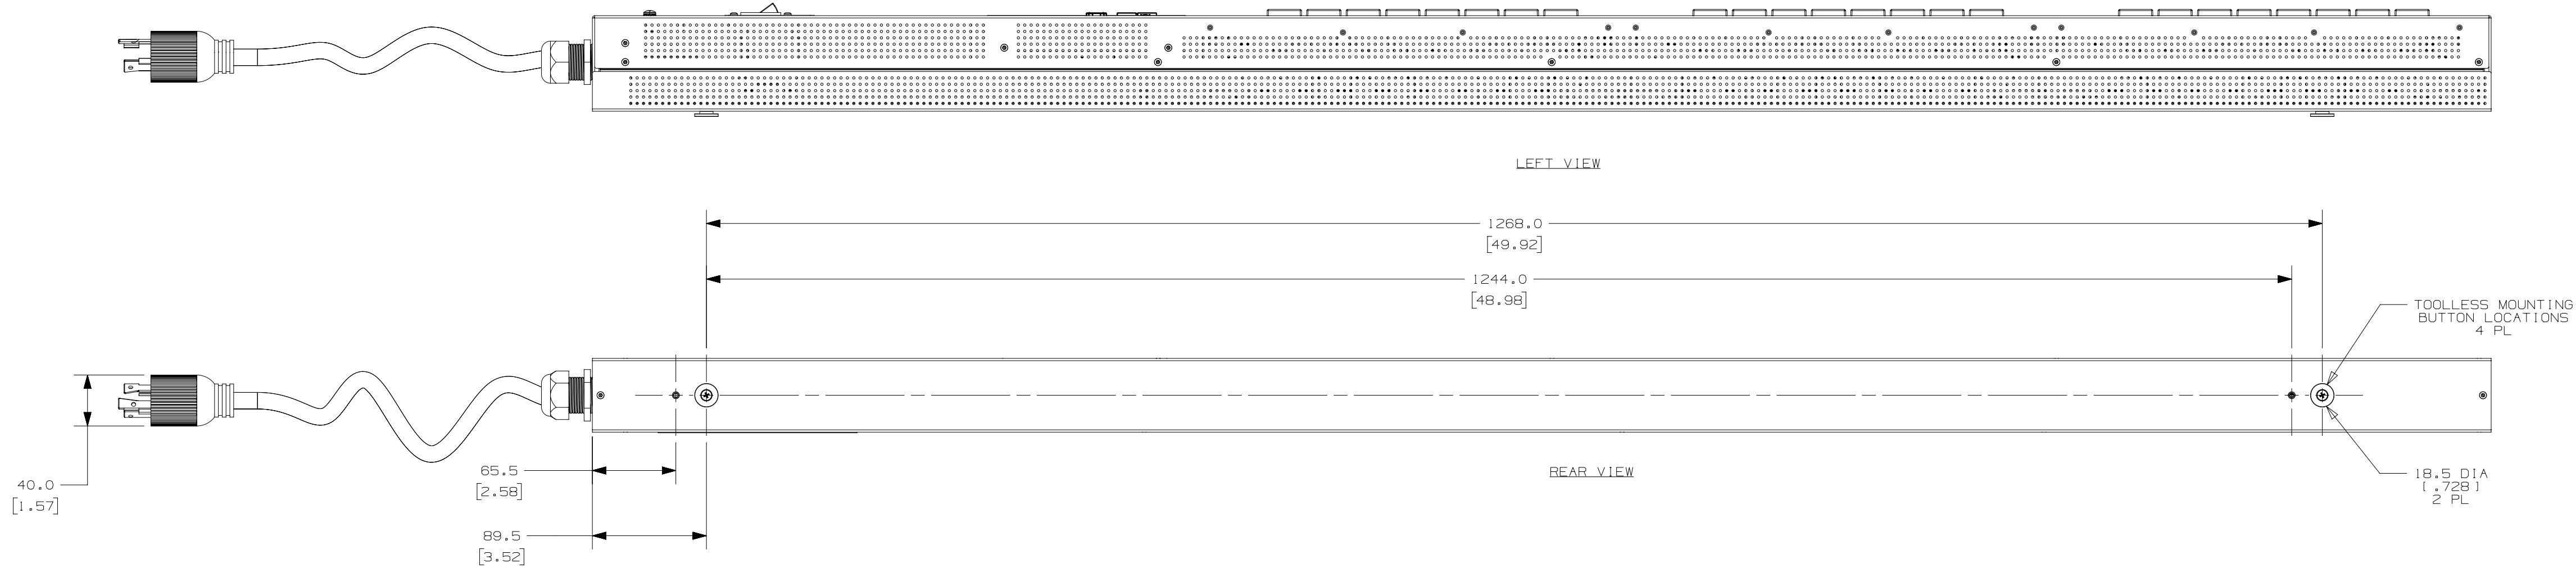



D

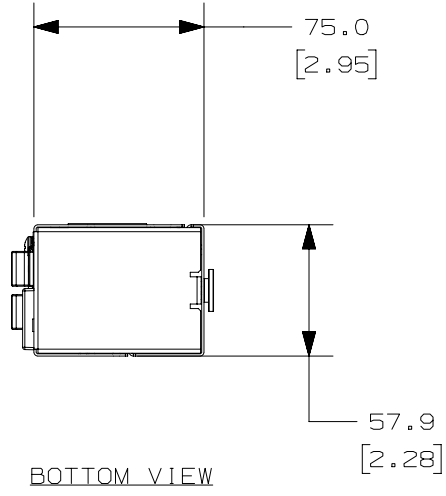


C

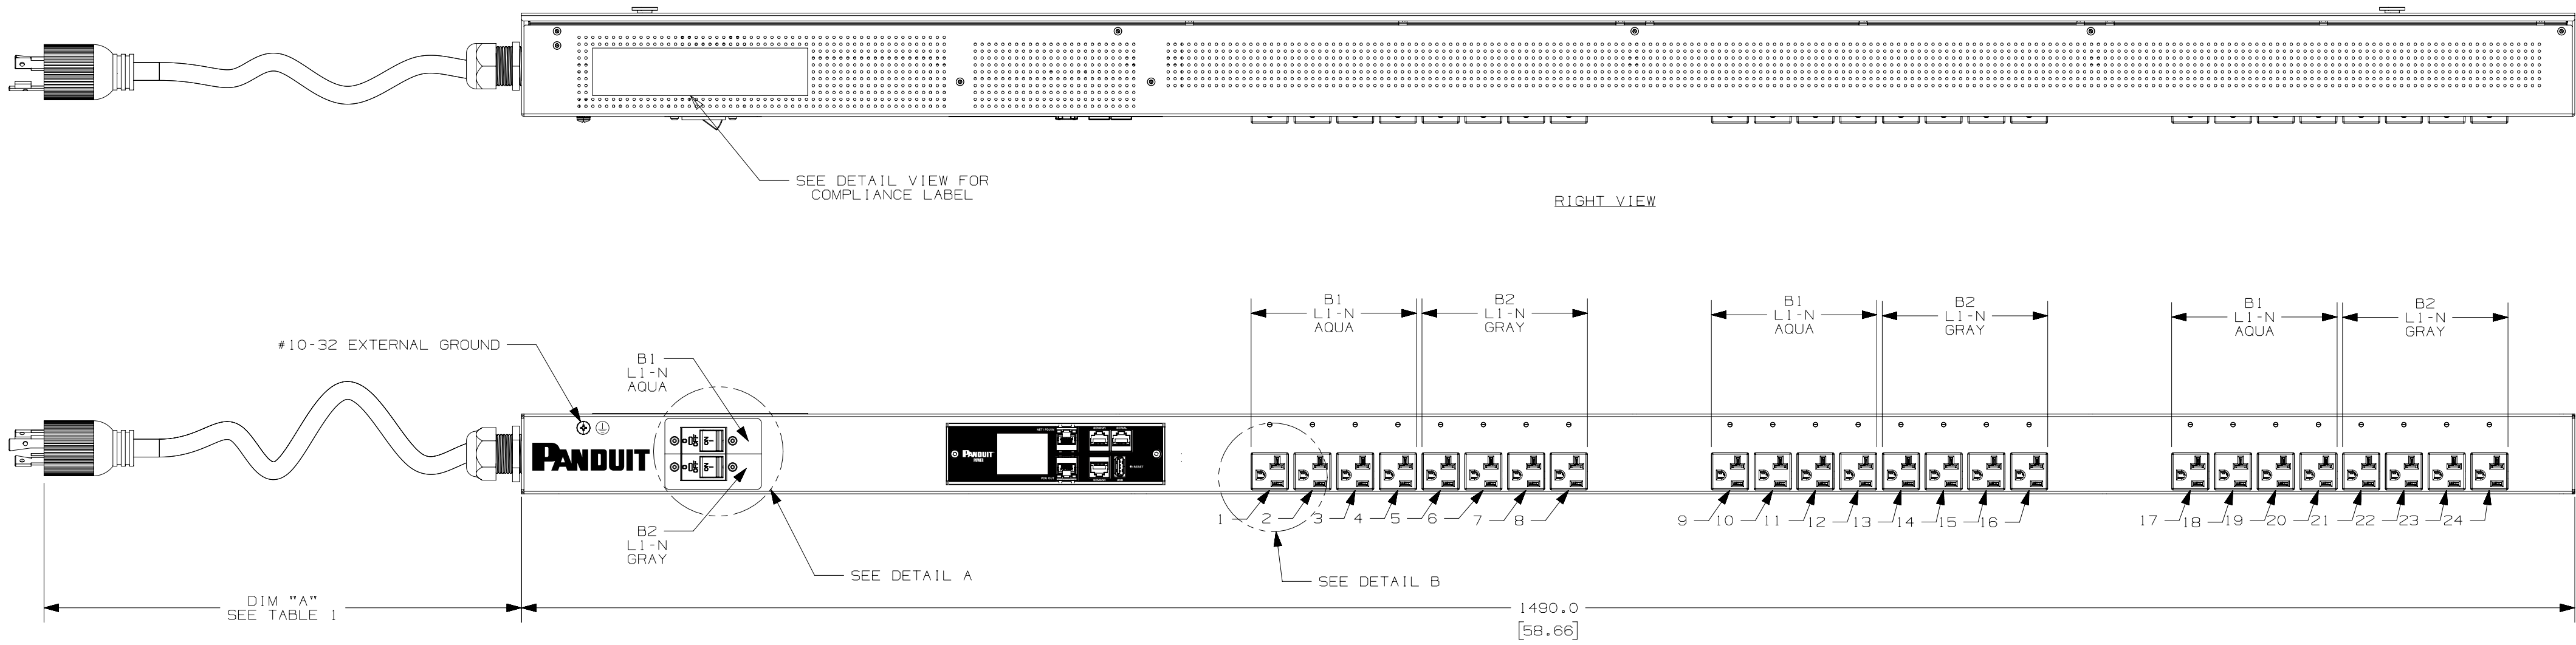

B

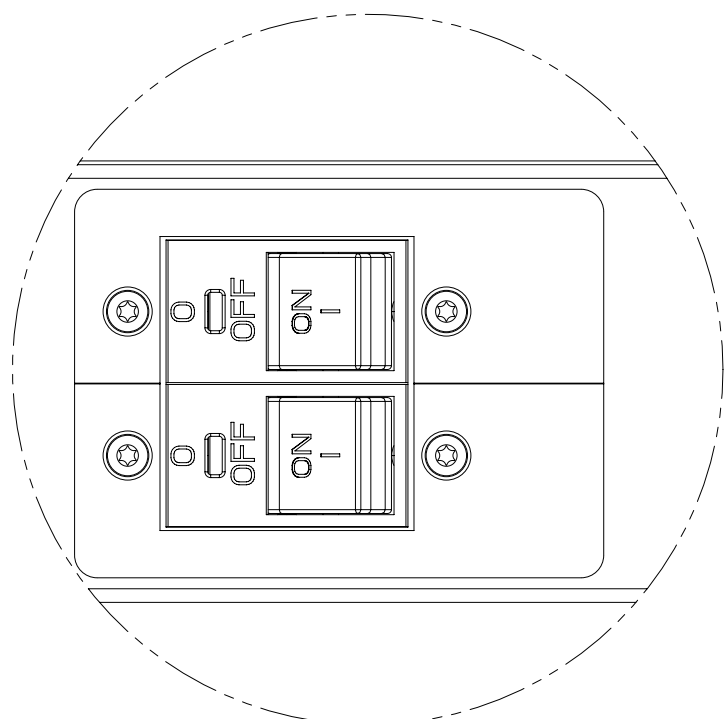

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION

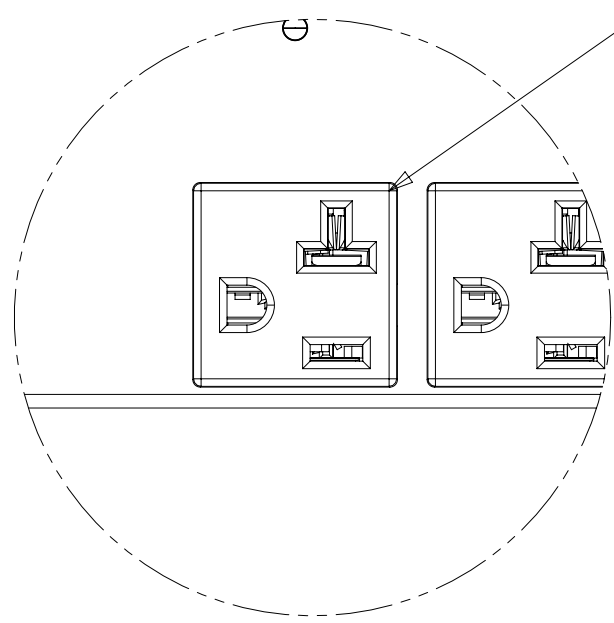

DETAIL B
SCALE 1:1
TYP 24X


FRONT VIEW

TABLE 1



PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E24E23L	EL2P MS PDU, 30 AMP, 12415-20R, NEMA L5-30P	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD
E24E23LTAA	TAA EL2P MS PDU, 30 AMP, 12415-20R, NEMA L5-30P	3000 +178/-89 [118.1 +7/-3.5]	BLACK (RAL 9005)	TBD

A

INPUT_PLUG_FRONT_VIEW

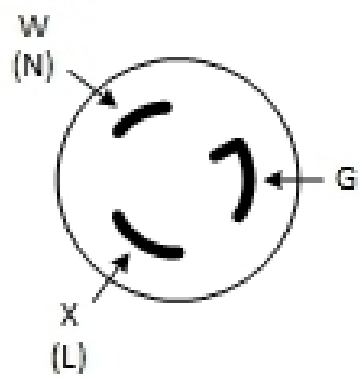

COMPLIANCE LABEL VIEW

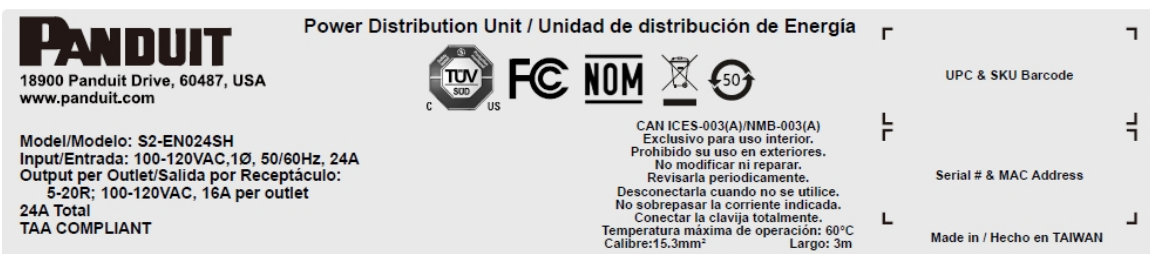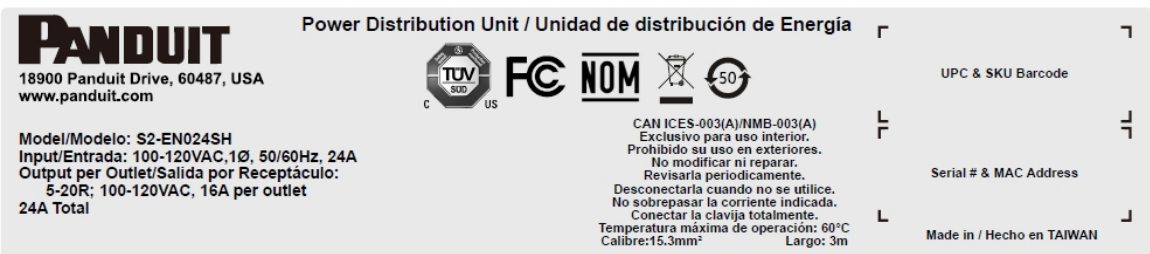

SPECIFICATION

- STANDARD:
 - UNIT TYPE: MS
 - ORIENTATION: VERTICAL, OU MID
 - OUTLET QTY & TYPE: 12415-20R
 - INPUT VOLTAGE: 100-120VAC
 - INPUT CURRENT: 30A (24A DERATED)
 - BREAKER QTY & TYPE: (2) 20AMP, SINGLE-POLE
 - INPUT PHASE: SINGLE-PHASE, L-N
 - RATED POWER: 2.9 KVA
 - INPUT PLUG: NEMA L5-30P 3W
- ADDITIONAL:
- ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
- HEXAGONS ARE USED FOR COMMUNICATION PURPOSES, CIRCLES ARE USED FOR CRITICAL DIMENSIONS, TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS, SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.

D

C

B

A

										E24E23L									
										CUSTOMER DRAWING									
										ITEM REVISION NAME E24E23L/00									
										DATASET FILE NAME E24E23L-DC/00A									
										UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± mm [IN]									
										NO DIMS R0.00									