


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

D

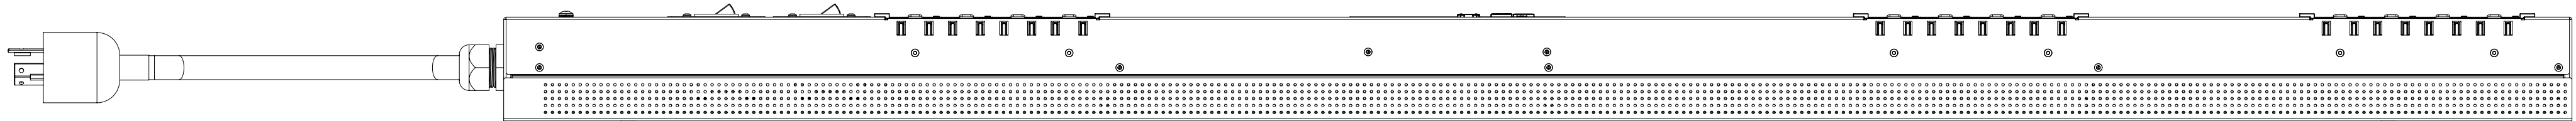

LEFT VIEW

SPECIFICATION

1. STANDARD:
UNIT TYPE: MS
ORIENTATION: VERTICAL, OU MID
OUTLET QTY & TYPE: (12)C13/C15, (12)C13/C15/C19/C21
INPUT VOLTAGE: 200–240VAC
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (2) 20AMP, DOUBLE-POLE
INPUT PHASE: SINGLE PHASE, L–L
RATED POWER: 5 KVA
INPUT PLUG: NEMA L6–30P 3W
REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET


NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

C




REAR VIEW

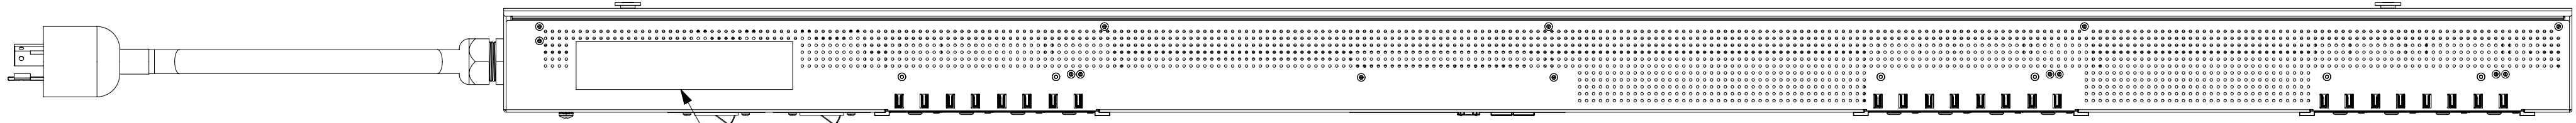


RIGHT VIEW

←

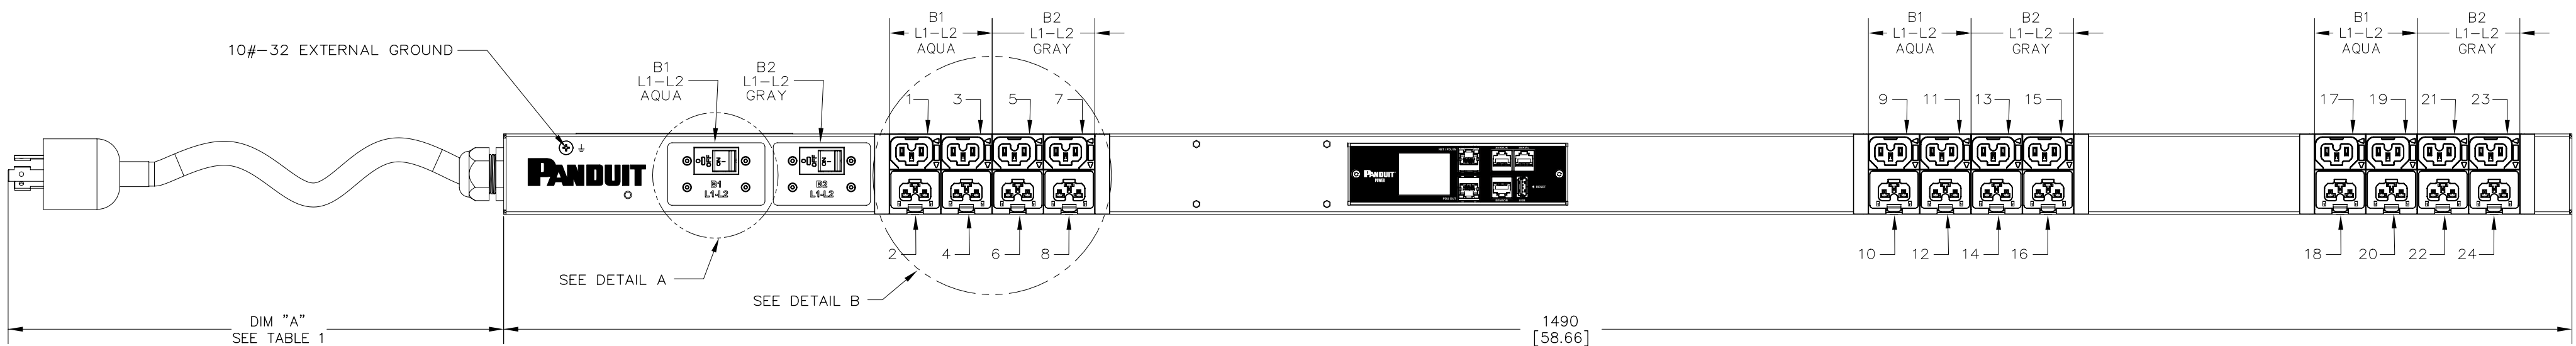


FRONT VIEW

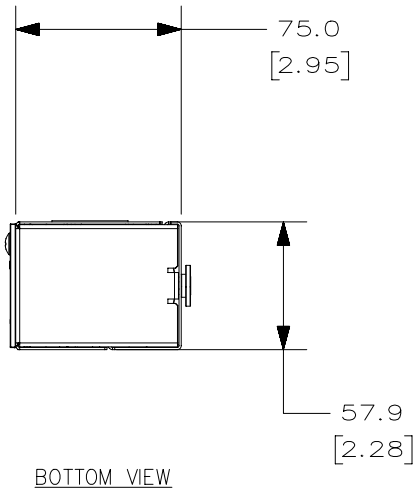

BOTTOM VIEW

B

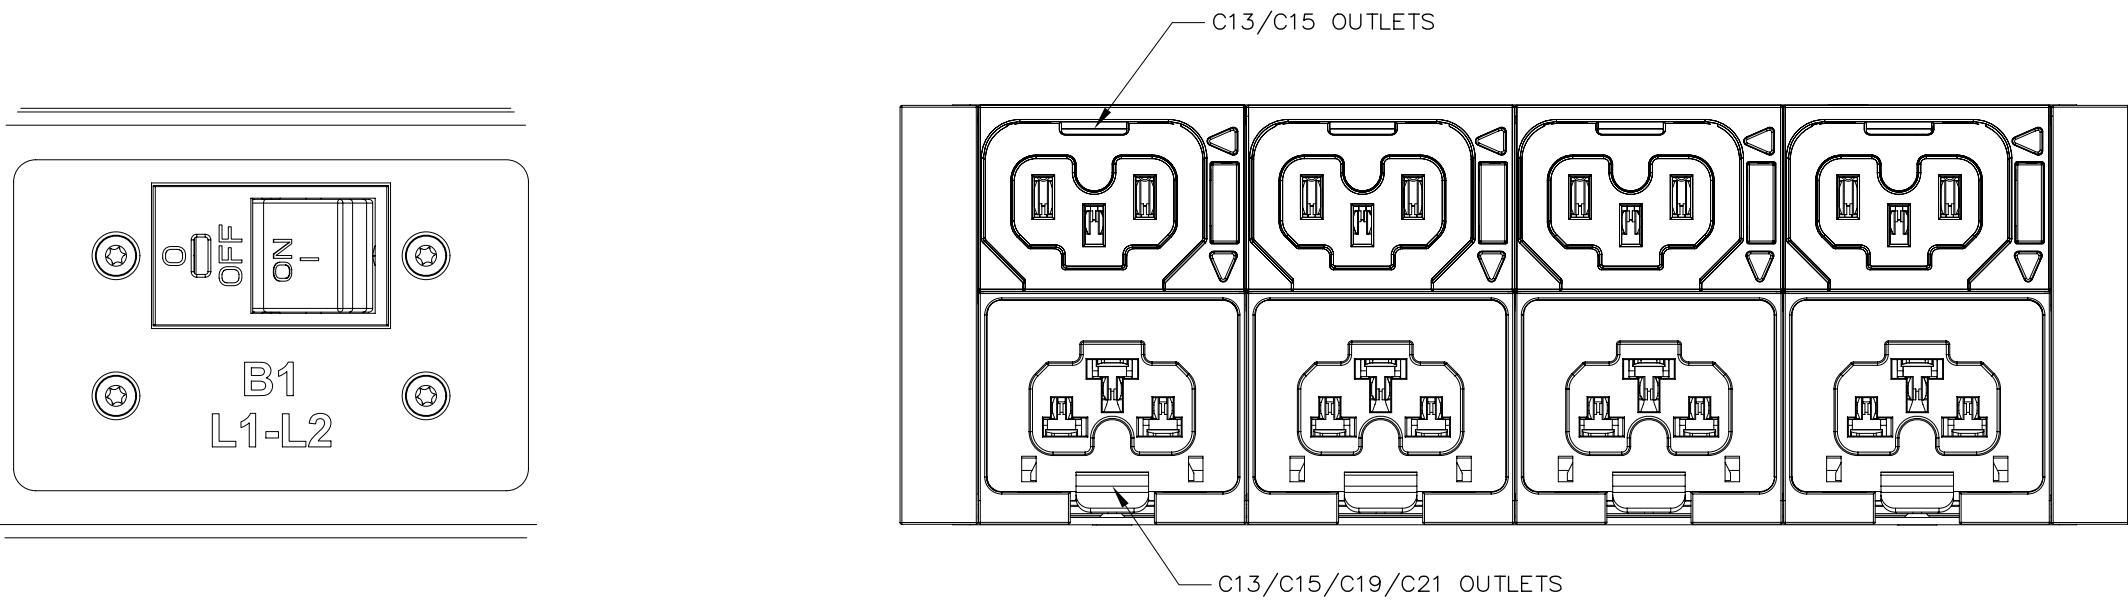

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 2X


DETAIL B
SCALE 1:1

TABLE 1


PART NUMBER	DESCRIPTION	DIM A	COLOR (–XX)	SHIPPING WEIGHT (KG)
E24E28L	EL2P MS PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L6–30P–3M ,BLACK	3000 +254/–127 [118.1 +10/–5]	BLACK (RAL 9005)	7
E24E28LTAA	TAA EL2P MS PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L6–30P–3M ,BLACK	3000 +254/–127 [118.1 +10/–5]	BLACK (RAL 9005)	7

A

INPUT PLUG FRONT VIEW

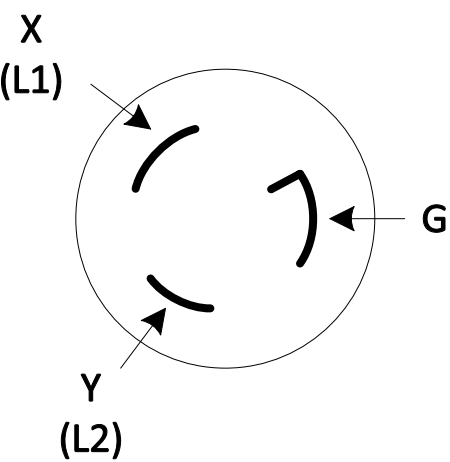

COMPLIANCE LABEL VIEW

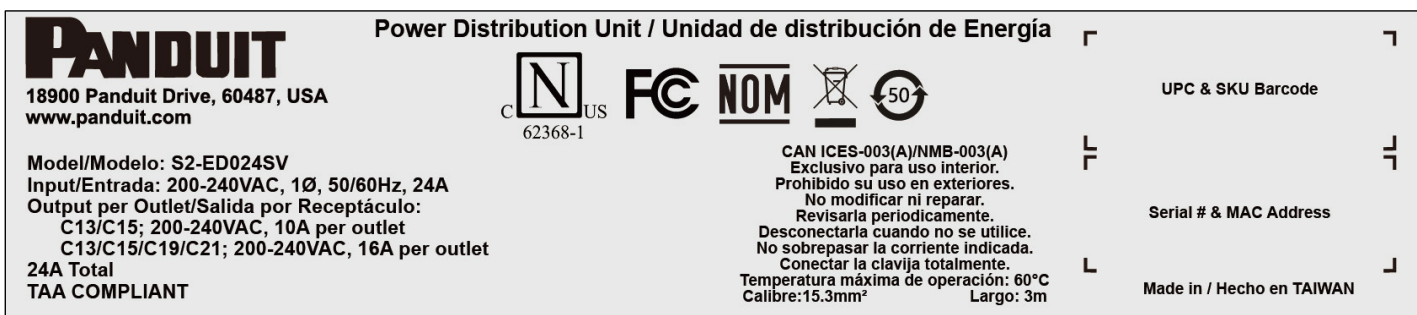

						TITLE					
						E24E28L					
						CUSTOMER DRAWING					
						ITEM REVISION NAME E24E28L/00				PANDUIT MATERIAL: NOT APPLICABLE DRAWING NUMBER: E24E28L-DC	
						DATASET FILE NAME E24E28L-DC/00A					
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]					
						THIRD ANGLE PROJECTION					
											
00A 10/20/2025 LLJ GLM MJD JHOL RROD RELEASE TO PRODUCTION						E24E28L					
REV DATE BY CHK APR DESCRIPTION						ECN					
DRWN BY DATE						CHK DATE		SCALE		SIZE	
LLJ 10/20/2025						GLM JHOL 10/20/2025		3:10		SHT 1 OF 1	