


LEFT VIEW




REAR VIEW

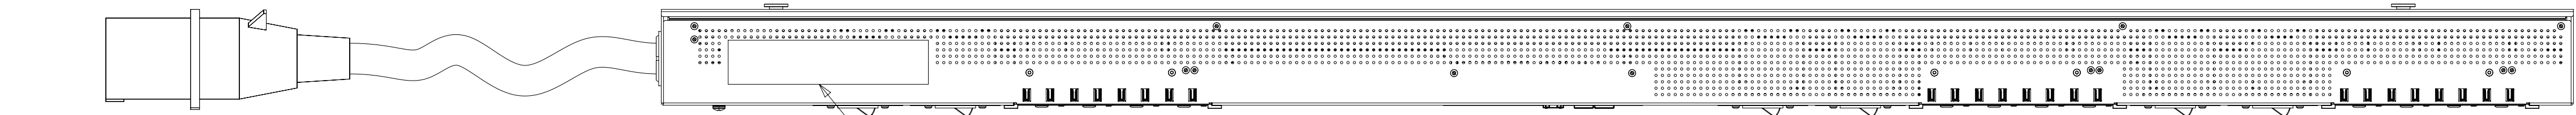


SEE DETAIL VIEW FOR COMPLIANCE LABEL


RIGHT VIEW

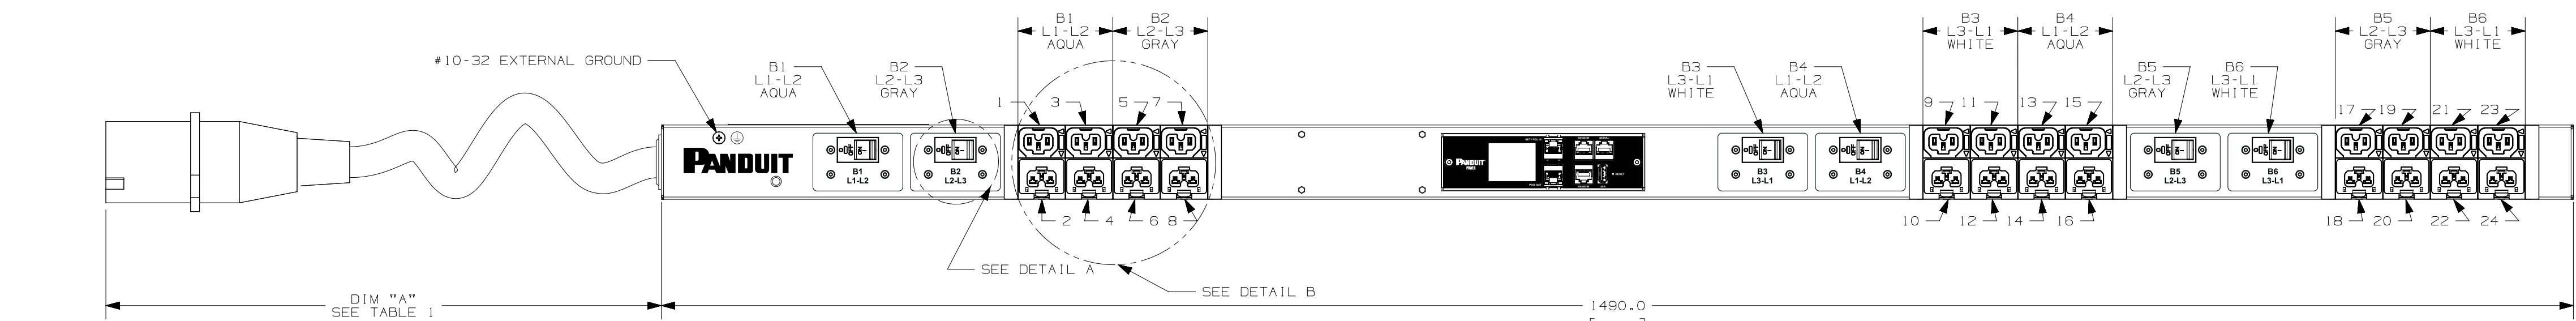

FRONT VIEW

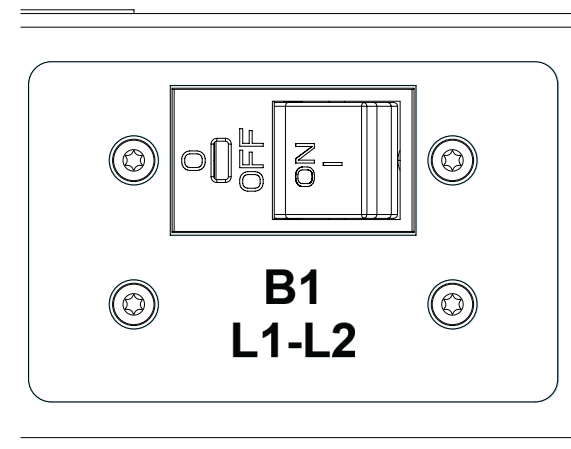

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 6X

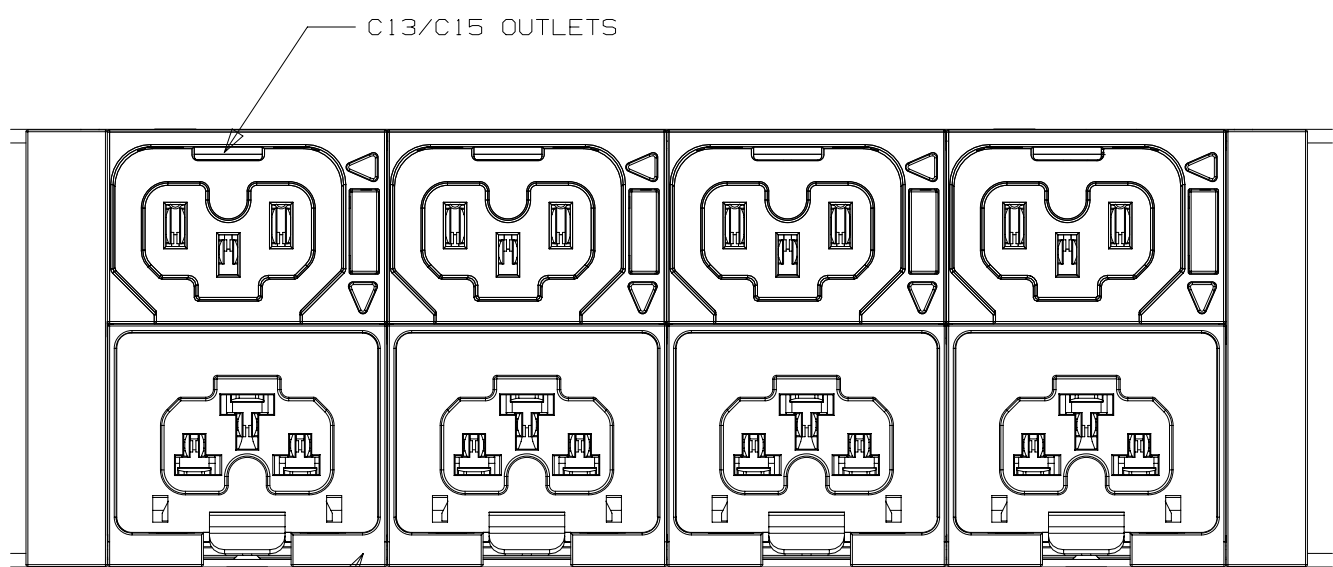


C13/C15/C19/C21 OUTLETS

DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E24E32L	EL2P MS PDU, 60 AMP, (12)C13/C15, (12)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (1P44)-3M, BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	14,5
E24E32LTAA	TAA EL2P MS PDU, 60 AMP, (12)C13/C15, (12)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (1P44)-3M, BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	14,5

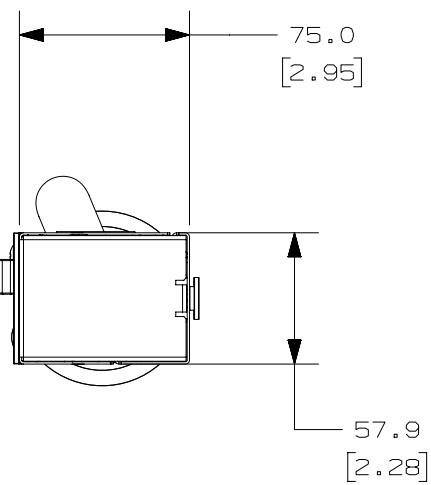

BOTTOM VIEW


SPECIFICATION

- STANDARD:
 - UNIT TYPE: MS
 - ORIENTATION: VERTICAL, 0U MID
 - OUTLET QTY & TYPE: (12)C13/C15, (12)C13/C15/C19/C21
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 60A (48A DERATED)
 - BREAKER QTY & TYPE: (6) 20AMP, DOUBLE-POLE
 - INPUT PHASE: 3-PHASE DELTA, L-L
 - RATED POWER: 17.3 KVA
 - INPUT PLUG: IEC 60309 3P+E 9H 60A (1P44)
- ADDITIONAL:
- ACCESSORIES:
 - PRODUCT SAFETY WARNING SHEET

NOTES

- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN [INCHES]
- TRIANGLES ARE USED TO IDENTIFY REVISED ITEMS. SQUARES ARE USED TO IDENTIFY BILL OF MATERIAL ITEMS.

INPUT_PLUG_FRONT_VIEW

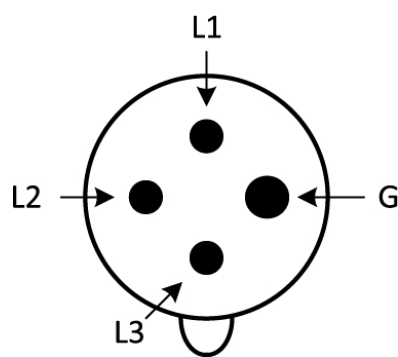

COMPLIANCE LABEL VIEW

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com

Model/Modelo: S2-ED048DV
Input/Entrada: 200-240VAC, DELTA, 3Ø, 50/60Hz, 48A
Output per Outlet/Salida por Receptáculo:
C13: 200-240VAC, 10A per outlet
C19: 200-240VAC, 16A per outlet
48A Total
TAA COMPLIANT

CAN ICES-003(A)/NMB-003(A)
Exclusivo para uso interior.
Prohibido su uso en exteriores.
No modificar ni reparar.
Revisarla periódicamente.
Desconectarla cuando no se utilice.
No sobrepasar la corriente indicada.
Conectar la clavija totalmente.
Temperatura máxima de operación: 60°C
Calibre: 31.4mm² Largo: 3m

UPC & SKU Barcode

Serial # & MAC Address

Made in / Hecho en TAIWAN

PANDUIT
18900 Panduit Drive, 60487, USA
www.panduit.com

Model/Modelo: S2-ED048DV
Input/Entrada: 200-240VAC, DELTA, 3Ø, 50/60Hz, 48A
Output per Outlet/Salida por Receptáculo:
C13: 200-240VAC, 10A per outlet
C19: 200-240VAC, 16A per outlet
48A Total

CAN ICES-003(A)/NMB-003(A)
Exclusivo para uso interior.
Prohibido su uso en exteriores.
No modificar ni reparar.
Revisarla periódicamente.
Desconectarla cuando no se utilice.
No sobrepasar la corriente indicada.
Conectar la clavija totalmente.
Temperatura máxima de operación: 60°C
Calibre: 31.4mm² Largo: 3m

UPC & SKU Barcode

Serial # & MAC Address

Made in / Hecho en China

TITLE				CUSTOMER DRAWING			
E24E32L				E24E32L-01			
ITEM REVISION NAME				E24E32L-DC/01A			
DATASET FILE NAME				E24E32L-DC/01A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE ± 0.1 mm (1 IN 1)				NOT APPLICABLE			
THIRD ANGLE PROJECTION				E24E32L-DC			
DRAWN BY: GLM				DATE: 09/10/2025			
BY: MIM				SCALE: 3:10			
CHK: MJD				SHT 1 OF 1			
APR: MJD				SIZE: D			
FIRST RELEASE OF SKU							
REV: 01A				ECN: E24E32L			
DATE: 03/31/2026							
BY: GLM							
CHK: MIM							
APR: MJD							
DESCRIPTION							