

SPECIFICATION

1. STANDARD:
UNIT TYPE: MSPO
ORIENTATION: VERTICAL, 0U MID
OUTLET QTY & TYPE: (12)C13/C15, (12)C13/C15/C19/C12
INPUT VOLTAGE: 200~240VAC
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (3) 20AMP, DOUBLE-POLE
INPUT PHASE: 3 PHASE DELTA, L-L
RATED POWER: 8.6 KVA
INPUT PLUG: NEMA L15-30P 4W
REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.



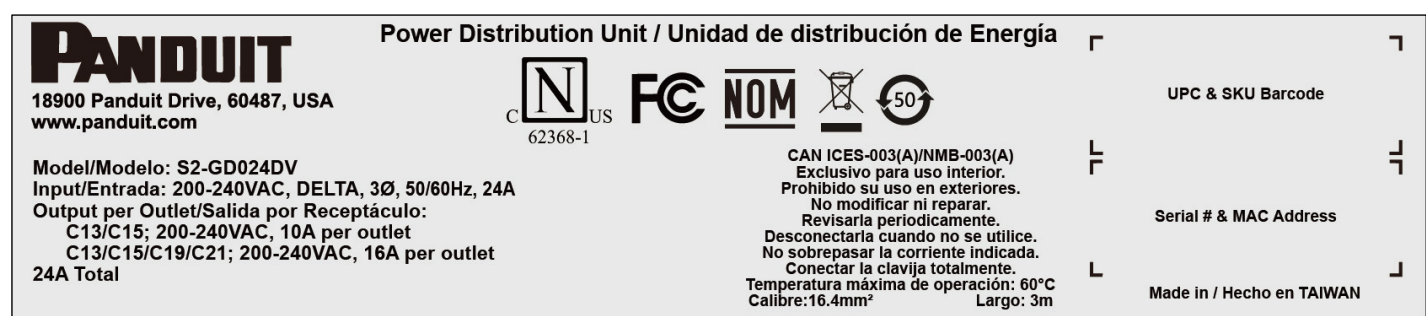
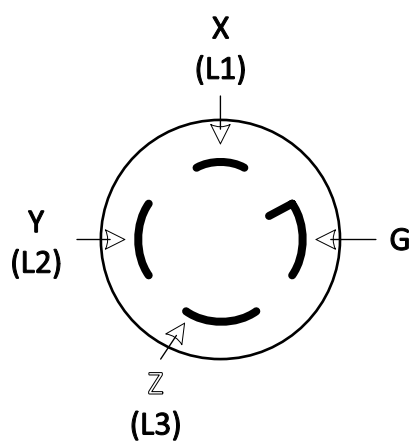


TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E24G02L	EL2P MSPO PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L15-30P-3M, BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	TBD
E24G02LTAA	TAA EL2P MSPO PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L15-30P-3M, BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	TBD

[illegible]