


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

D

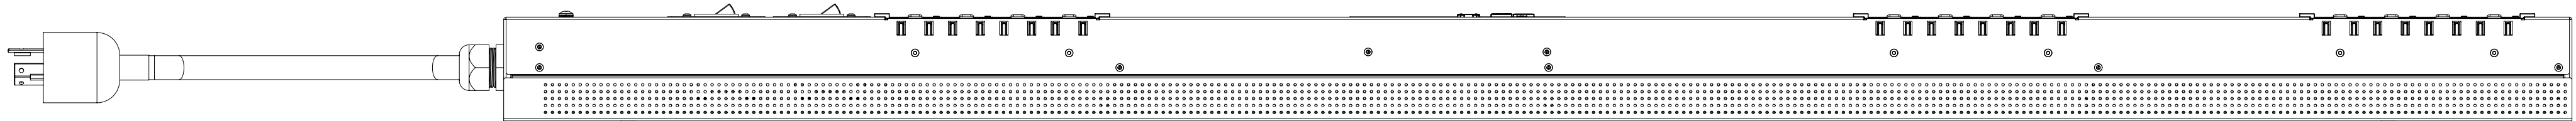

LEFT VIEW


- SPECIFICATION**
- STANDARD:**
UNIT TYPE: MSPO
ORIENTATION: VERTICAL, OU MID
OUTLET QTY & TYPE: (12)C13/C15, (12)C13/C15/C19/C21
INPUT VOLTAGE: 200–240VAC
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (2) 20AMP, DOUBLE-POLE
INPUT PHASE: SINGLE PHASE, L–L
RATED POWER: 5 KVA
INPUT PLUG: NEMA L6–30P 3W
REGULATORY STANDARD: RoHS COMPLIANT
 - ADDITIONAL:**
 - ACCESSORIES:**
PRODUCT SAFETY WARNING SHEET

- NOTES**
- PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
 - FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.


C




REAR VIEW

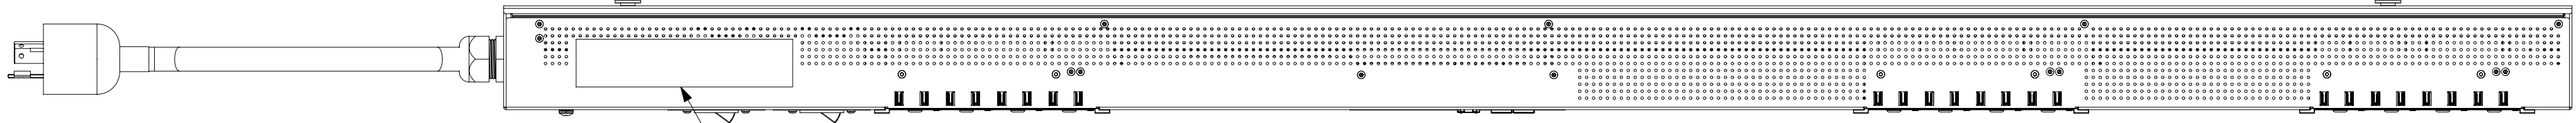

RIGHT VIEW

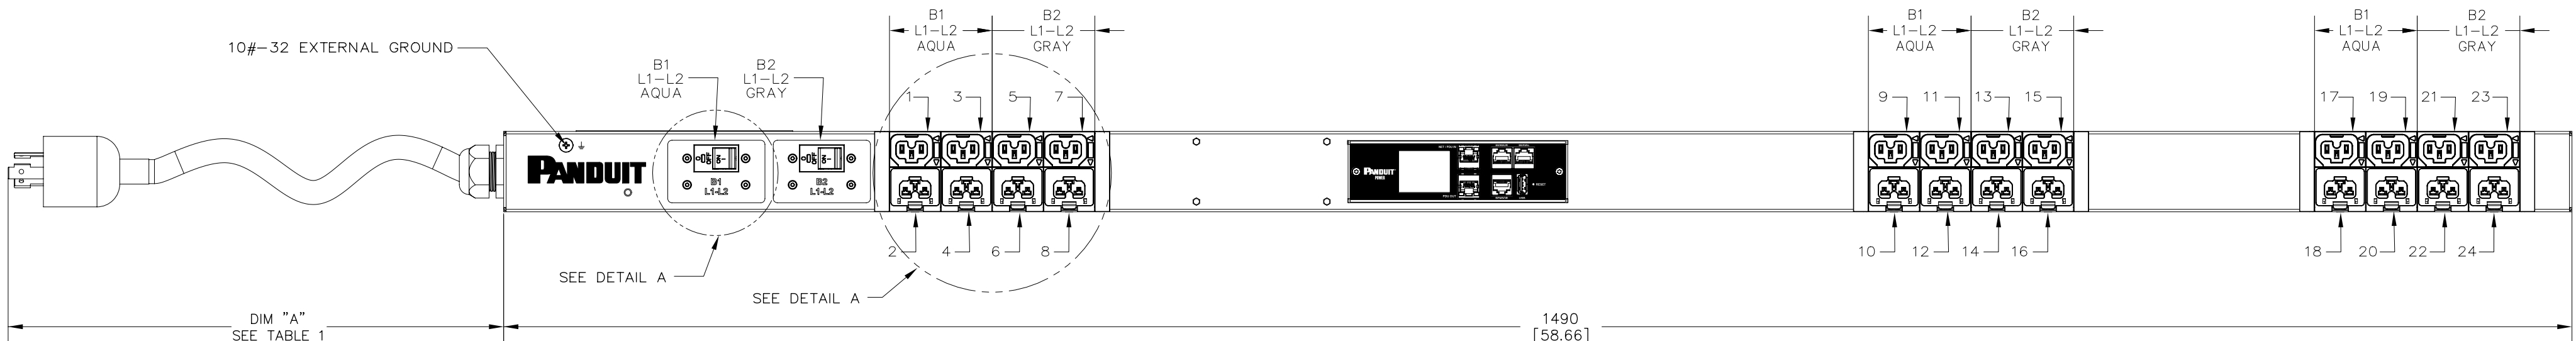


FRONT VIEW

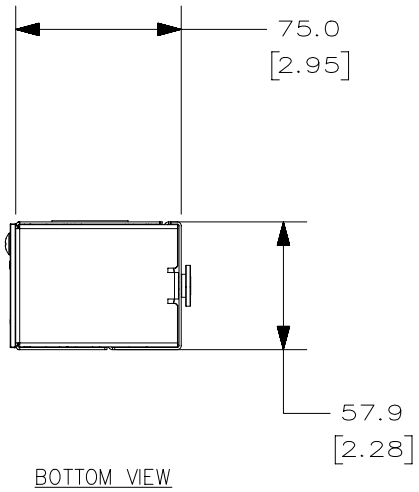

BOTTOM VIEW

B

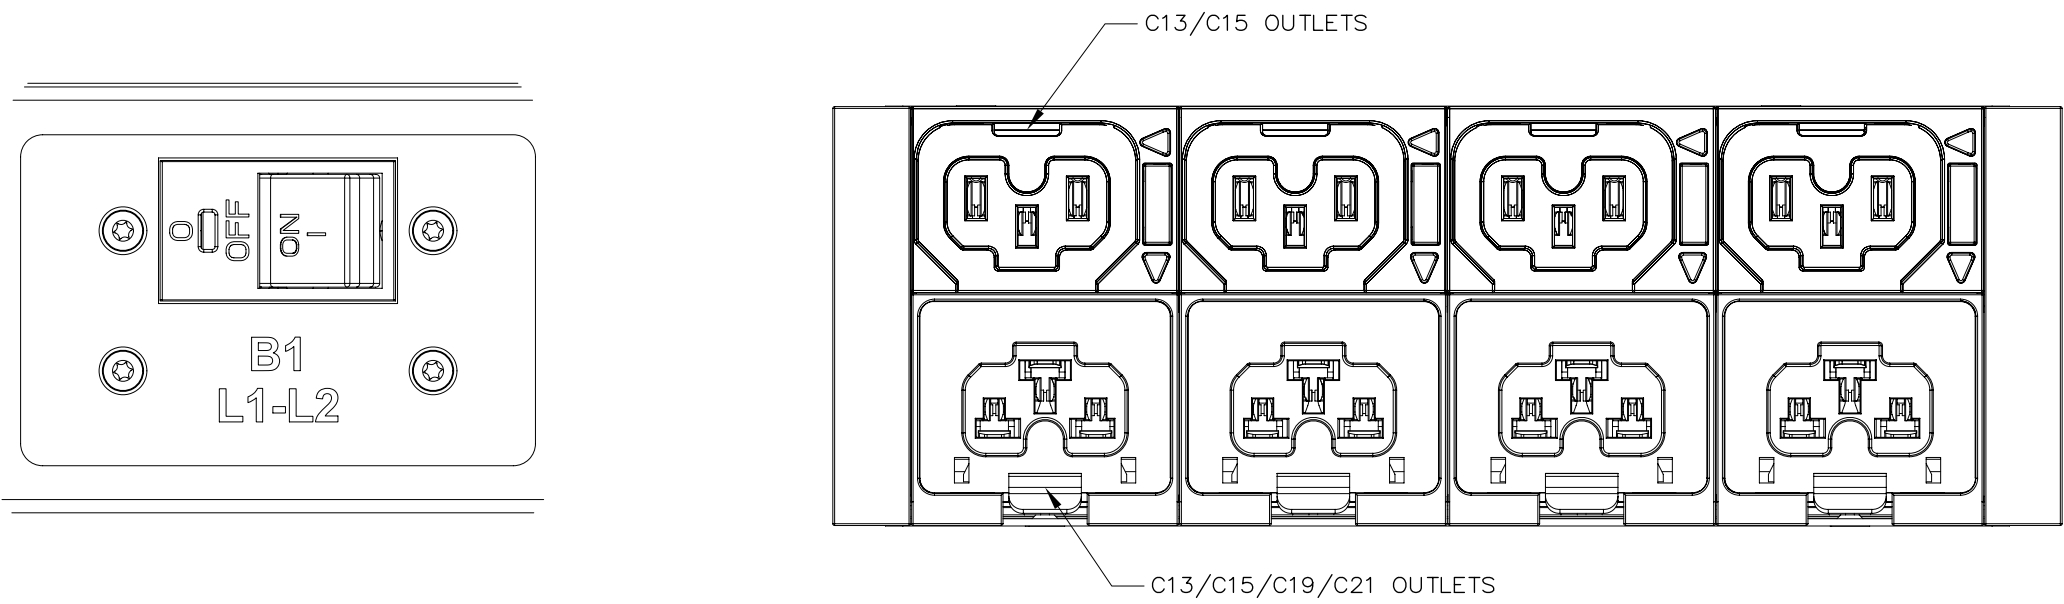

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 2X


DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (–XX)	SHIPPING WEIGHT (KG)
E24G01L	EL2P MSPO PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L6–30P–3M ,BLACK	3000 +254/–127 [118.1 +10/–5]	BLACK (RAL 9005)	7

A

INPUT PLUG FRONT VIEW

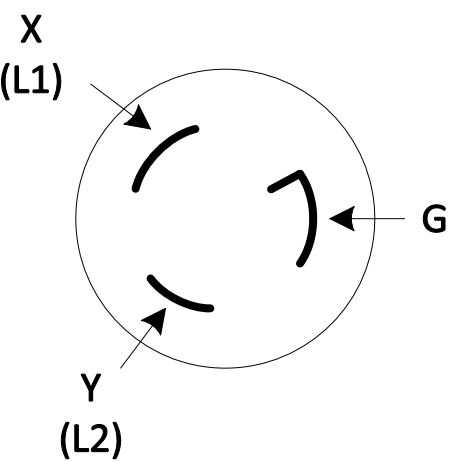

COMPLIANCE LABEL VIEW



TITLE						E24G01L			
CUSTOMER DRAWING						E24G01L-DC			
ITEM REVISION NAME						E24G01L-DC/00A			
DATASET FILE NAME						E24G01L-DC/00A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]						NOT APPLICABLE			
THIRD ANGLE PROJECTION						E24G01L-DC			
DRAWN BY DATE						GLM JHOL 10/20/2025			
SCALE						3:10			
SHT 1 OF 1						SIZE D			