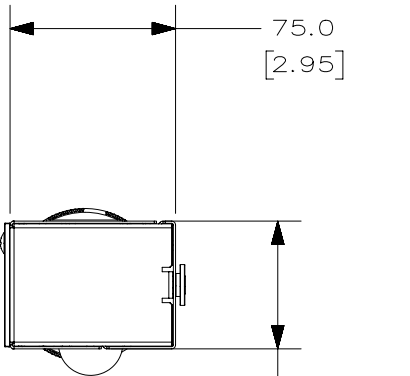


SPECIFICATION

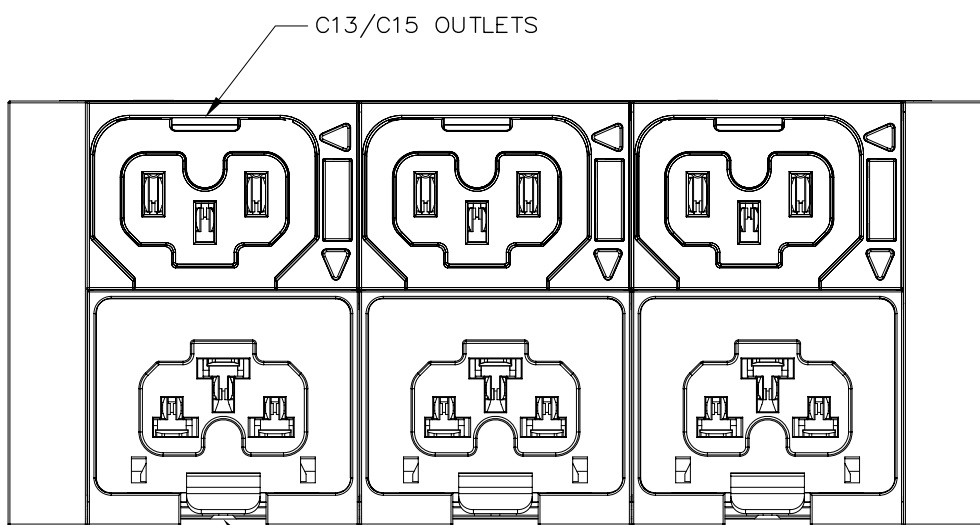
1. STANDARD:
UNIT TYPE: MS
ORIENTATION: VERTICAL, OU FULL
OUTLET QTY & TYPE: (18)C13/C15, (18)C13/C15/C19/C12
INPUT VOLTAGE: 200~240VAC
INPUT CURRENT: 30A(24A DERATED)
BREAKER QTY & TYPE: (3) 20AMP, DOUBLE-POLE
INPUT PHASE: 3 PHASE DELTA, L-L
RATED POWER: 8.6 KVA
INPUT PLUG: NEMA L15-30P 4W
REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
3. ACCESSORIES:
PRODUCT SAFETY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.



BOTTOM VIEW

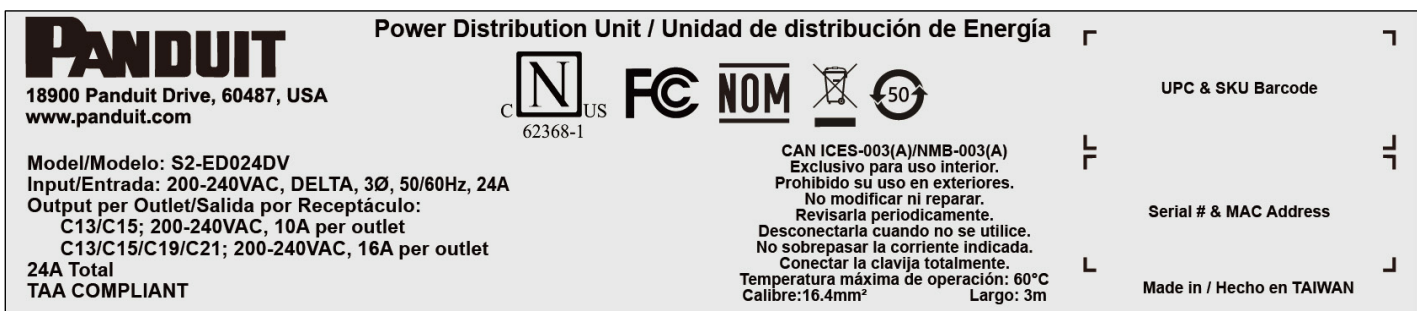
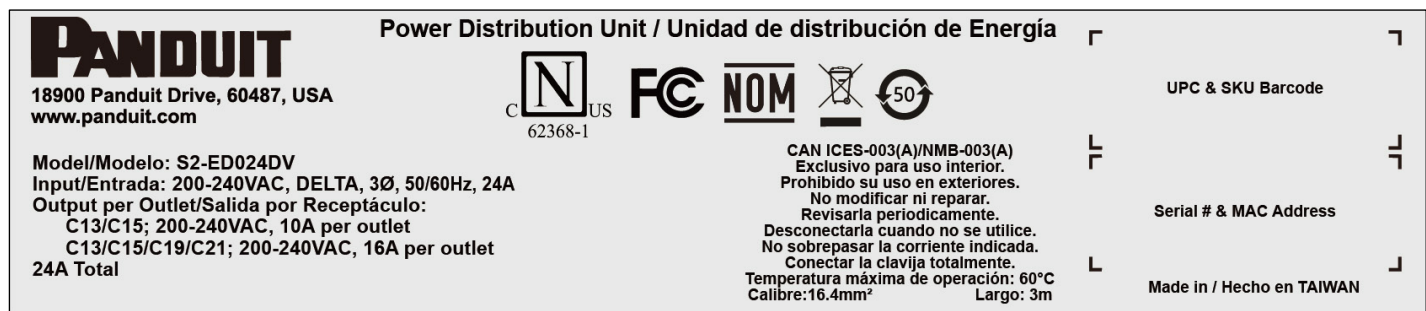
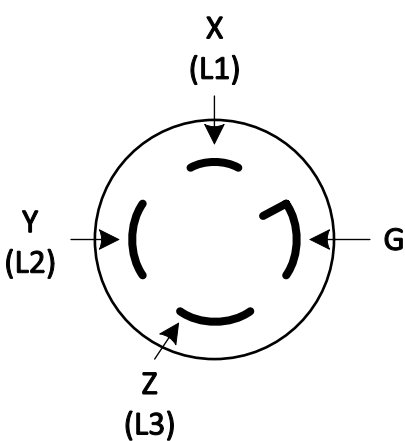


DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 3X

DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E36E34L	EL2P MS PDU, 30 AMP, (18)C13/C15, (18)C13/C15/C19/C21, NEMA L15-30P-3M, BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	12.2
E36E34LTAA	TAA EL2P MS PDU, 30 AMP, (18)C13/C15, (18)C13/C15/C19/C21, NEMA L15-30P-3M, BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	12.2

[illegible]