


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

D

D

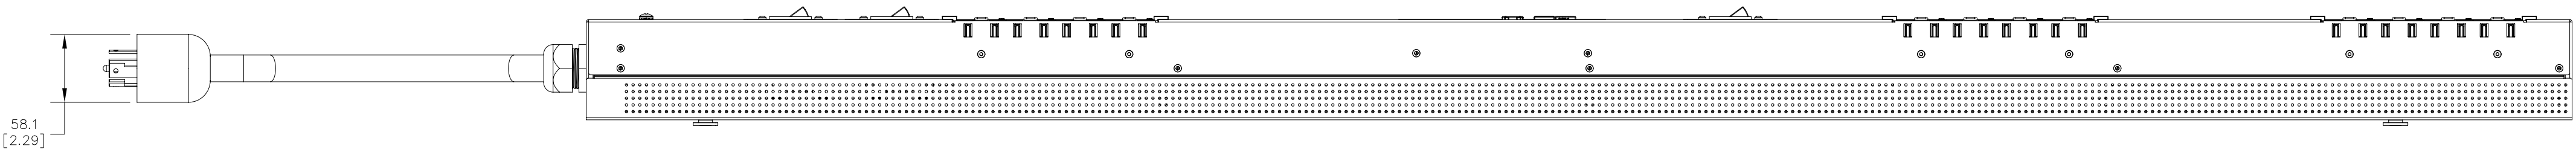

LEFT VIEW

- SPECIFICATION**
1. STANDARD:
- |                      |                                  |
|----------------------|----------------------------------|
| UNIT TYPE:           | MSPO                             |
| ORIENTATION:         | VERTICAL, OU MID                 |
| OUTLET QTY & TYPE:   | (12)C13/C15, (12)C13/C15/C19/C21 |
| INPUT VOLTAGE:       | 100–120/200–240VAC               |
| INPUT CURRENT:       | 30A(24A DERATED)                 |
| BREAKER QTY & TYPE:  | (3) 20AMP, DOUBLE-POLE           |
| INPUT PHASE:         | 3 PHASE WYE, L–L                 |
| RATED POWER:         | 8.6 KVA                          |
| INPUT PLUG:          | NEMA L21–30P 5W                  |
| REGULATORY STANDARD: | RoHS COMPLIANT                   |

2. ADDITIONAL:


3. ACCESSORIES:  
PRODUCT SAFETY WARNING SHEET

**NOTES**


1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]  
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

C


C

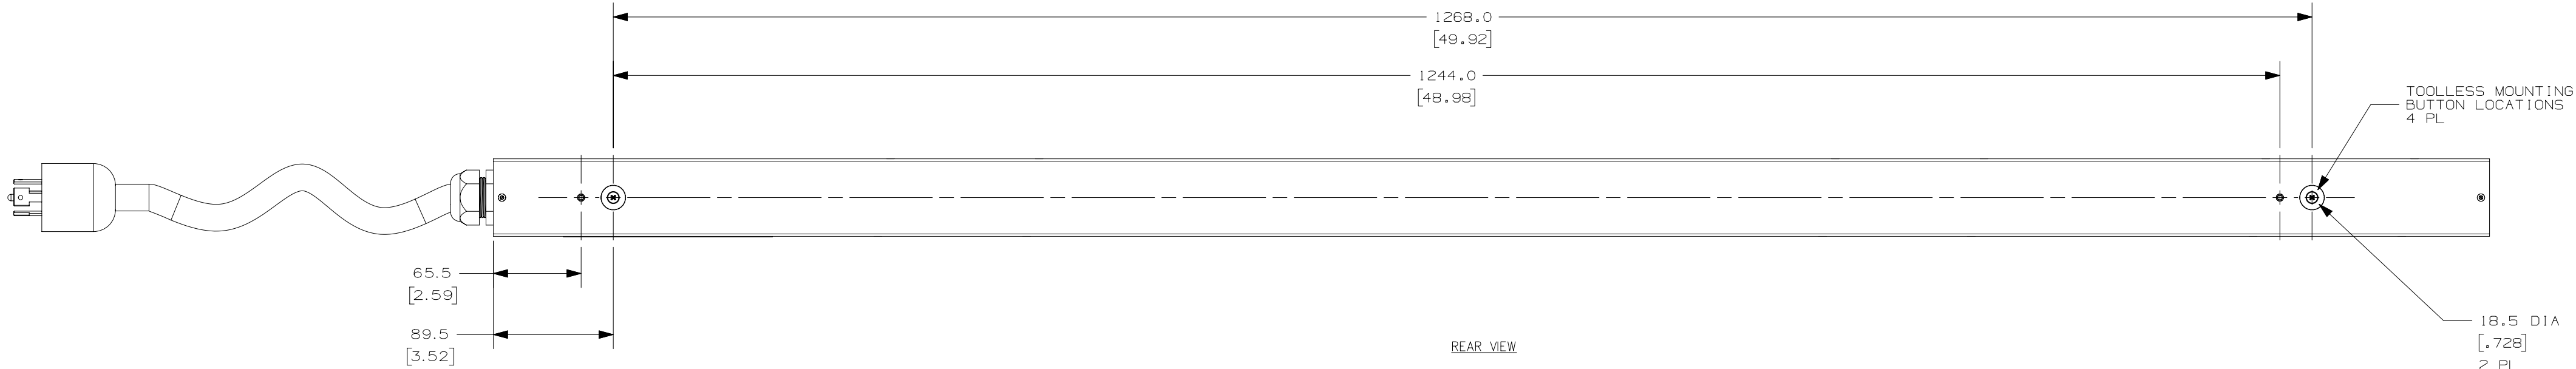


REAR VIEW

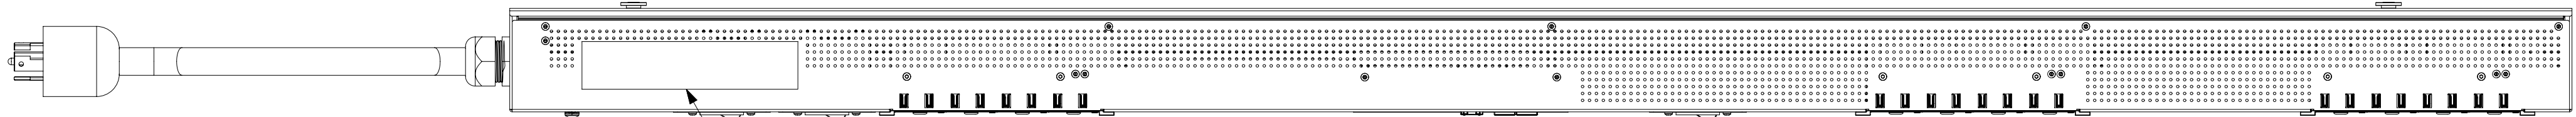

RIGHT VIEW

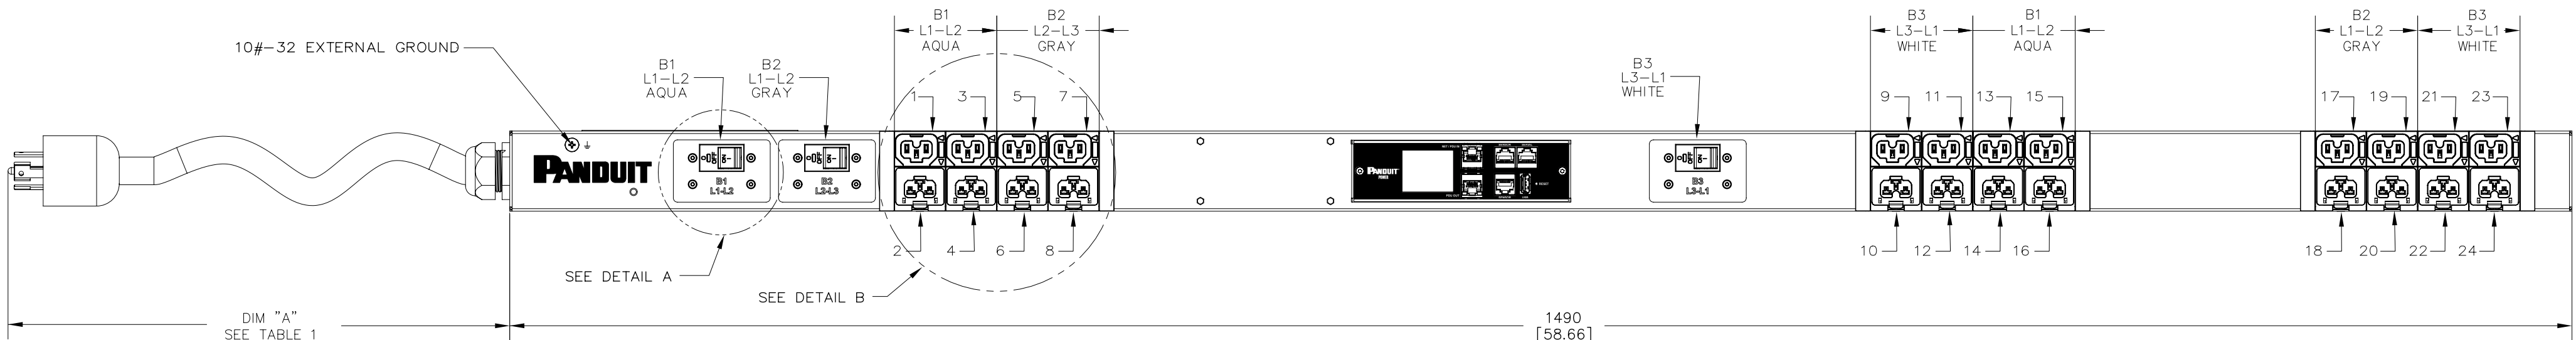


FRONT VIEW

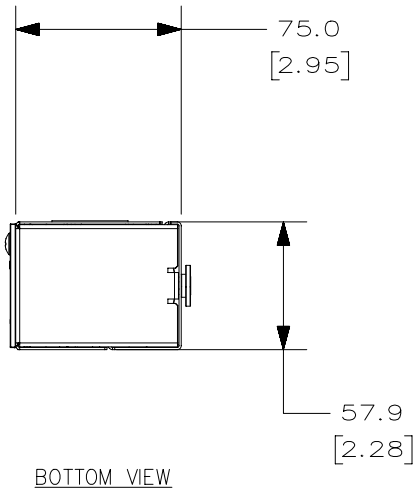

BOTTOM VIEW

B

B

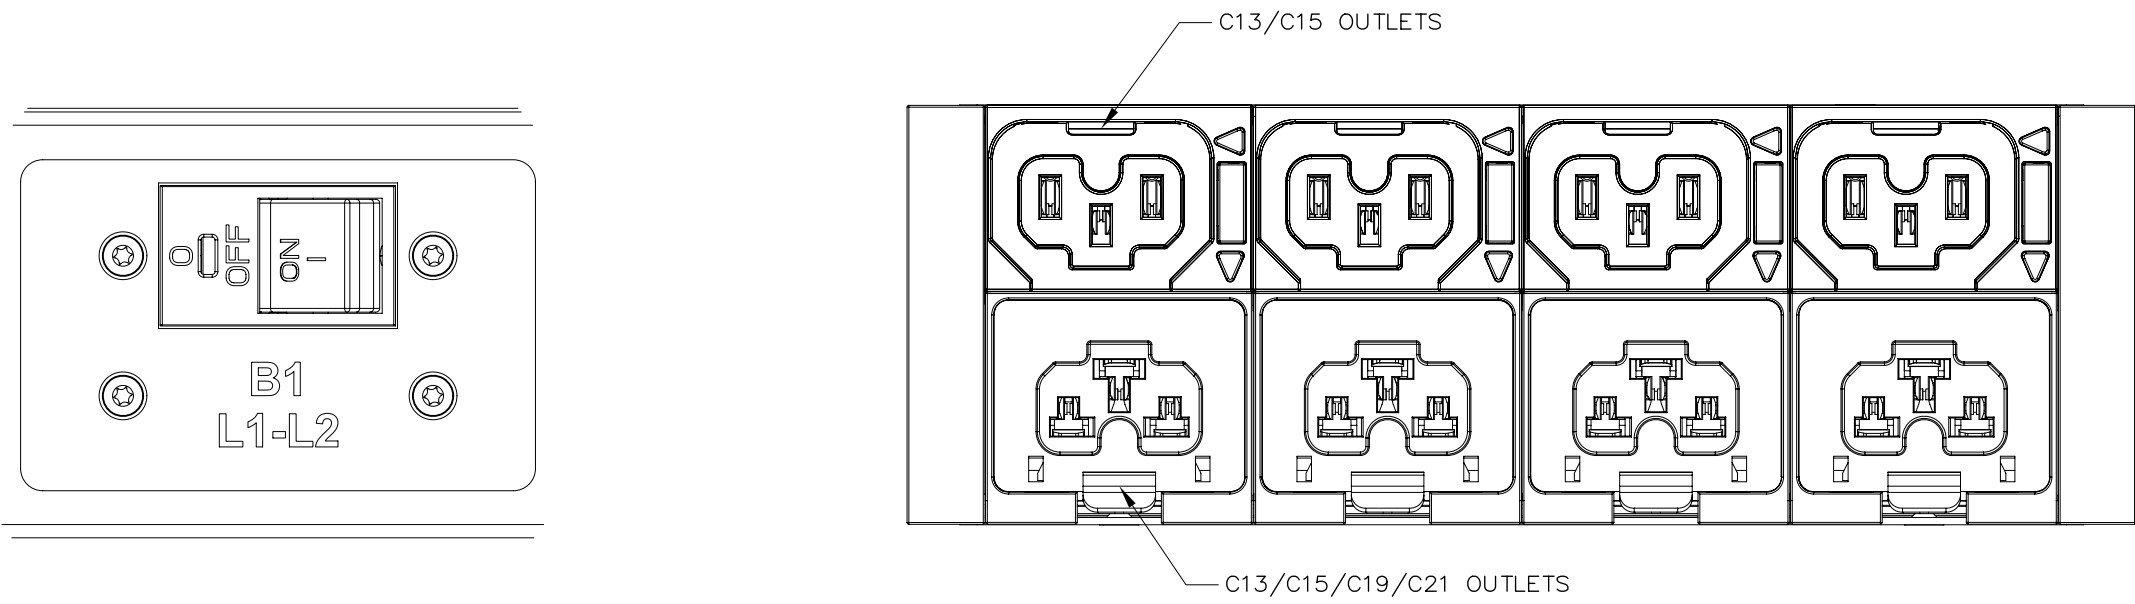

DETAIL A  
SCALE 1:1  
CIRCUIT BREAKER ORIENTATION  
TYP 3X

DETAIL B  
SCALE 1:1


TABLE 1

| PART NUMBER | DESCRIPTION                                                                         | DIM A                         | COLOR (–XX)      | SHIPPING WEIGHT (KG) |
|-------------|-------------------------------------------------------------------------------------|-------------------------------|------------------|----------------------|
| E24G03L     | EL2P MSPO PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L21–30P–3M, BLACK     | 3000 +254/–127 [118.1 +10/–5] | BLACK (RAL 9005) | TBD                  |
| E24G03LTAA  | TAA EL2P MSPO PDU, 30 AMP, (12)C13/C15, (12)C13/C15/C19/C21, NEMA L21–30P–3M, BLACK | 3000 +254/–127 [118.1 +10/–5] | BLACK (RAL 9005) | TBD                  |

A

A

INPUT PLUG FRONT VIEW

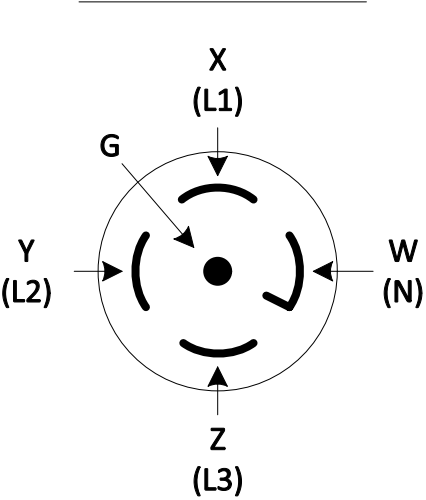

COMPLIANCE LABEL VIEW



| TITLE                                                           |  |  |  |  |  |
|-----------------------------------------------------------------|--|--|--|--|--|
| E24G03L                                                         |  |  |  |  |  |
| CUSTOMER DRAWING                                                |  |  |  |  |  |
| ITEM REVISION NAME                                              |  |  |  |  |  |
| E24G03L/00                                                      |  |  |  |  |  |
| DATASET FILE NAME                                               |  |  |  |  |  |
| E24G03L-DC/00A                                                  |  |  |  |  |  |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN] |  |  |  |  |  |
| THIRD ANGLE PROJECTION                                          |  |  |  |  |  |
| DRAWING NUMBER: E24G03L-DC                                      |  |  |  |  |  |
| SHT 1 OF 1                                                      |  |  |  |  |  |
| SIZE D                                                          |  |  |  |  |  |
| DRAWN BY DATE BY CHK APR RELEASE TO PRODUCTION E24G03L          |  |  |  |  |  |
| REV DATE BY CHK APR DESCRIPTION ECN                             |  |  |  |  |  |
| LLJ 02/04/2026 GLM JHOL 3:10                                    |  |  |  |  |  |