THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

SPECIFICATION

1. STANDARD:
   - UNIT TYPE: MS
   - ORIENTATION: VERTICAL, 0U FULL
   - OUTLET QTY & TYPE: (18)C13/C15, (18)C13/C15/C19/C21
   - INPUT VOLTAGE: 200-240VAC
   - INPUT CURRENT: 30A(24A DERATED)
   - BREAKER QTY & TYPE: (2) 20AMP, DOUBLE-POLE
   - INPUT PHASE: SINGLE PHASE, L-L
   - RATED POWER: 5 KVA
   - INPUT PLUG: NEMA L6-30P 3W
   - REGULATORY STANDARD: RoHS COMPLIANT
2. ADDITIONAL:
3. ACCESSORIES:
   PRODUCT SAFEY WARNING SHEET

NOTES

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.



LEFT VIEW

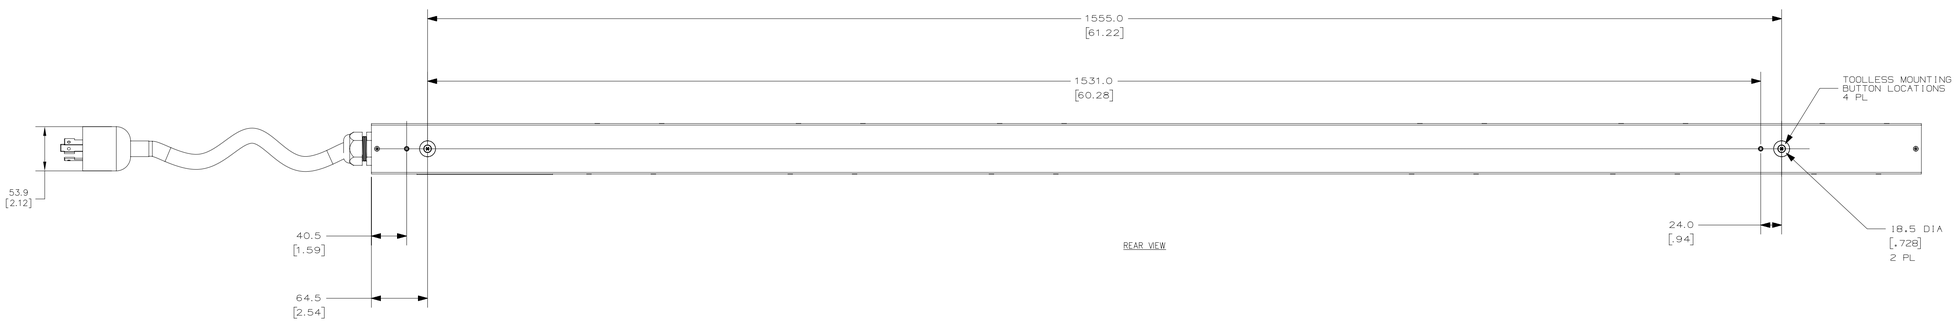

REAR VIEW

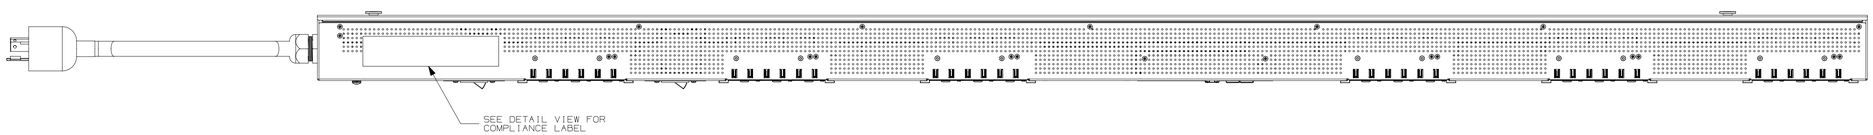

RIGHT VIEW

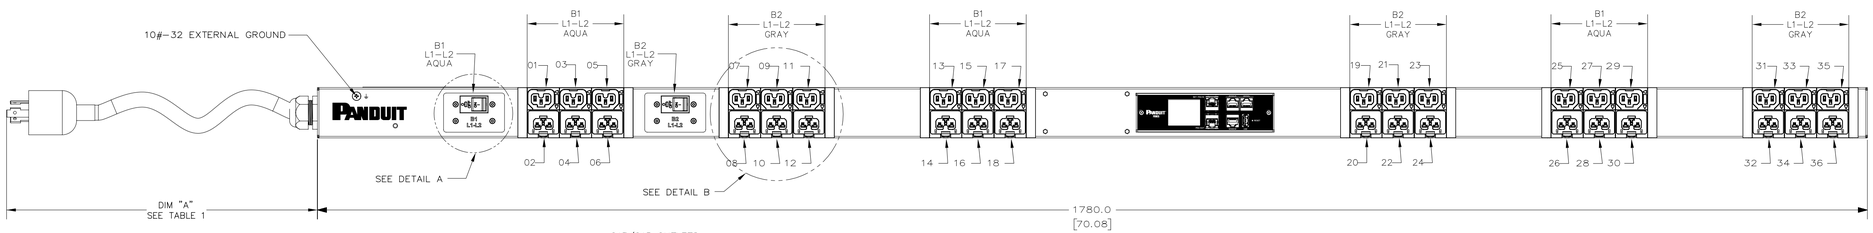

FRONT VIEW



BOTTOM VIEW



DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 2X

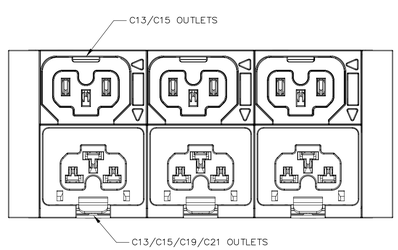

DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (-XX)	SHIPPING WEIGHT (KG)
E36E33L	EL2P MS PDU, 30 AMP, (18)C13/C15, (18)C13/C15/C19/C21, NEMA L6-30P-3M ,BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	8.5
E36E33LTAA	TAA EL2P MS PDU, 30 AMP, (18)C13/C15, (18)C13/C15/C19/C21, NEMA L6-30P-3M ,BLACK	3000 +254/-127 [118.1 +10/-5]	BLACK (RAL 9005)	8.5

INPUT PLUG FRONT VIEW



COMPLIANCE LABEL VIEW

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	10/20/2025	LLJ	GLM JHOL	MJD RROD	RELEASE TO PRODUCTION	E36E33L

TITLE: E36E33L

CUSTOMER DRAWING

ITEM REVISION NAME: E36E33L/00

DATASET FILE NAME: E36E33L-DC/00A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]
BELOW: ±0.5 [±0.0]
0001-0500: ±1.0 [±0.04]
0501-2000: ±1.5 [±0.06]
2001-4000: ±2.0 [±0.08]
THIRD ANGLE PROJECTION

MATERIAL: NOT APPLICABLE

DRAWING NUMBER: E36E33L-DC

DRAWN BY	DATE	CH	SCALE	SIZE
LLJ	10/20/2025	GLM JHOL	3:10	SHT 1 OF 1

20191005/18