

D

C

B

A

D

C

B

A

- SPECIFICATION**
1. STANDARD:

UNIT TYPE:

MSPO

ORIENTATION:

VERTICAL, OU MID

OUTLET QTY & TYPE:

(12)C13/C15, (12)C13/C15/C19/C21

INPUT VOLTAGE:

200–240VAC

INPUT CURRENT:

60A (48A DERATED)

BREAKER QTY & TYPE:

(6) 20AMP, DOUBLE-POLE

INPUT PHASE:

3-PHASE DELTA, L-L

RATED POWER:

17.3 KVA

INPUT PLUG:


IEC 60309 3P+E 9H 60A (IP44)

REGULATORY STANDARD:

RoHS COMPLIANT
2. ADDITIONAL:
3. ACCESSORIES:

PRODUCT SAFETY WARNING SHEET


- NOTES**
1. PRIMARY DIMENSIONS ARE IN MILLIMETERS, SECONDARY DIMENSIONS IN[INCHES]
2. FOR FULL PRODUCT FUNCTIONLITY REFER TO THE USER MANUAL.

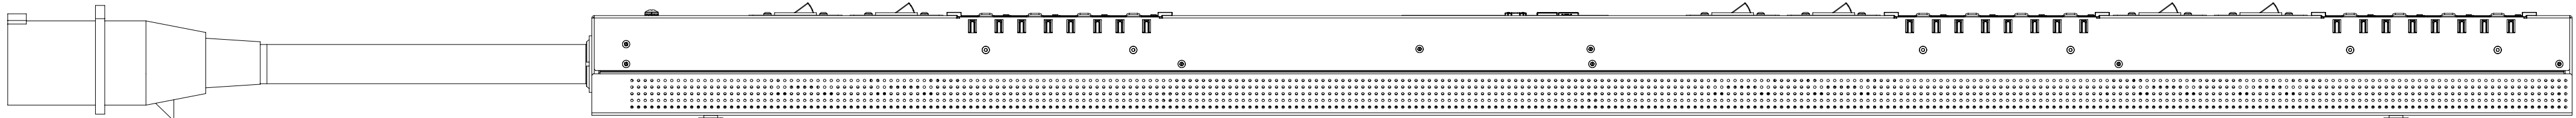


LEFT VIEW




REAR VIEW

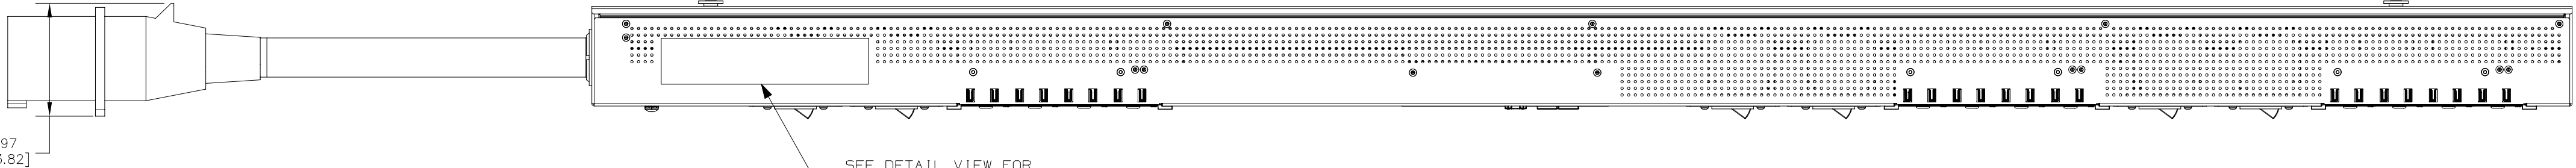


RIGHT VIEW

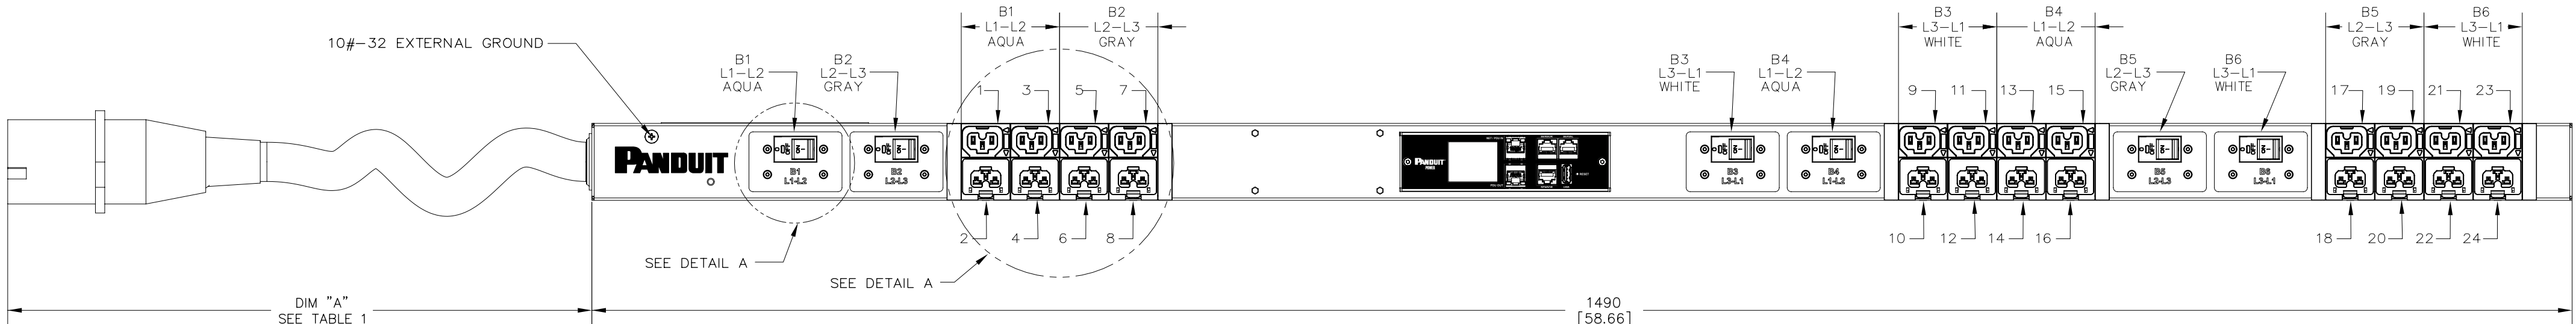


FRONT VIEW

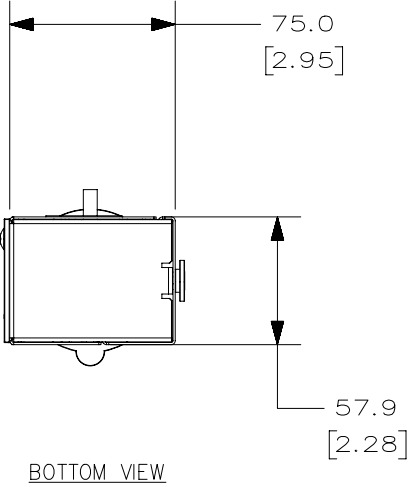

BOTTOM VIEW

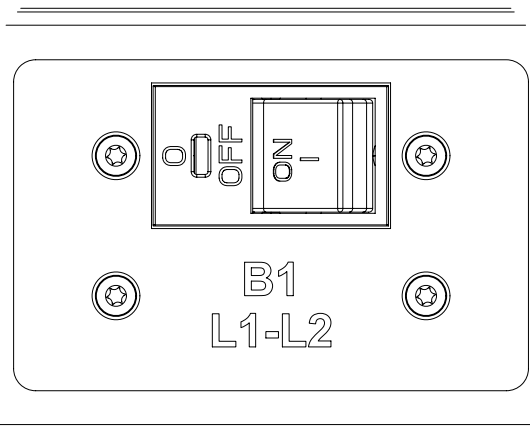

DETAIL A
SCALE 1:1
CIRCUIT BREAKER ORIENTATION
TYP 6X

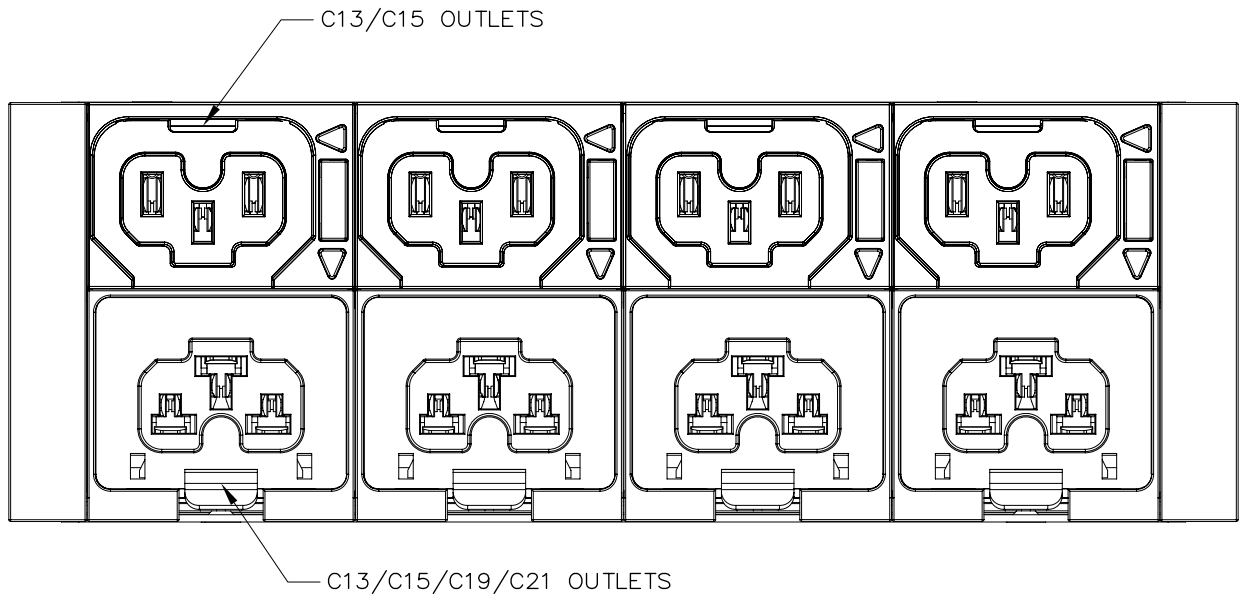


DETAIL B
SCALE 1:1

TABLE 1

PART NUMBER	DESCRIPTION	DIM A	COLOR (–XX)	SHIPPING WEIGHT (KG)
E24G05L	EL2P MSPO PDU, 60 AMP, (12)C13/C15, (12)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (IP44)–3M ,BLACK	3000 +254/–127 [118.1 +10/–5]	BLACK (RAL 9005)	9.5
E24G05LTAA	TAA EL2P MSPO PDU, 60 AMP, (12)C13/C15, (12)C13/C15/C19/C21, IEC 60309 3P+E 9h 60A (IP44)–3M ,BLACK	3000 +254/–127 [118.1 +10/–5]	BLACK (RAL 9005)	9.5

INPUT PLUG FRONT VIEW

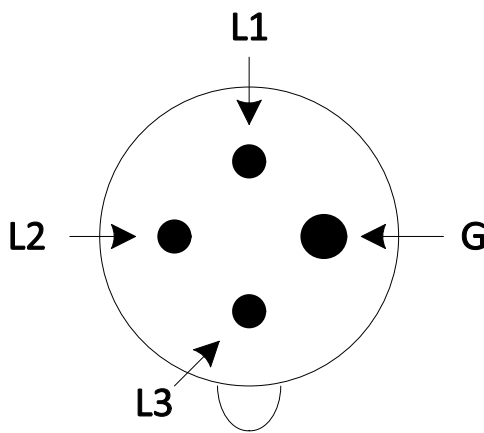

COMPLIANCE LABEL VIEW



TITLE					E24G05L				
CUSTOMER DRAWING					E24G05L-DC				
ITEM REVISION NAME					E24G05L-DC/00A				
DATASET FILE NAME					E24G05L-DC/00A				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]					NOT APPLICABLE				
THIRD ANGLE PROJECTION					E24G05L-DC				
DRAWN BY DATE					GLM JHOL 10/20/2025				
REV DATE BY CHK APR					RELEASE TO PRODUCTION				
DESCRIPTION					E24G05L				
ECN					E24G05L				
SCALE					3:10				
SHT 1 OF 1					SHT 1 OF 1				