

- Models AD-26P, AD-27P and AD-56P

Atkinson Dynamics Panel Mount Intercoms

Heavy duty, tamper-resistant Panel-Mount Intercoms, designed for single-channel, two-way communications with integrated volume control, TALK/LISTEN switch, and robust brushed aluminum construction that includes a Neoprene™ gasket and stainless steel hardware. Accommodating the full range of Atkinson Dynamics speakers, the flush-mount units are available in 12VDC, 24VDC, and 120VAC 50/60Hz models.




FEATURES

- Heavy duty tamper resistant intercom
- Single-channel, two-way communications
- Integrated volume control and Talk/Listen switch
- Requires a matching Atkinson Dynamics Speaker: AD-SF-25, AD-SS-25, and AD-SO-25
- Available in 12VDC, 24VDC, and 120VAC 50/60Hz
- UL and cUL Listed

MODEL	VOLTAGE	OPERATING CURRENT	STANDBY CURRENT
AD-26P	12VDC	1.47 A	100 mA
AD-27P	120VAC 50/60Hz	240 mA	83 mA
AD-56P	24VDC	1.65 A	100 mA

Atkinson Dynamics Panel Mount Intercoms (AD-26P, AD-27P, and AD-56P)

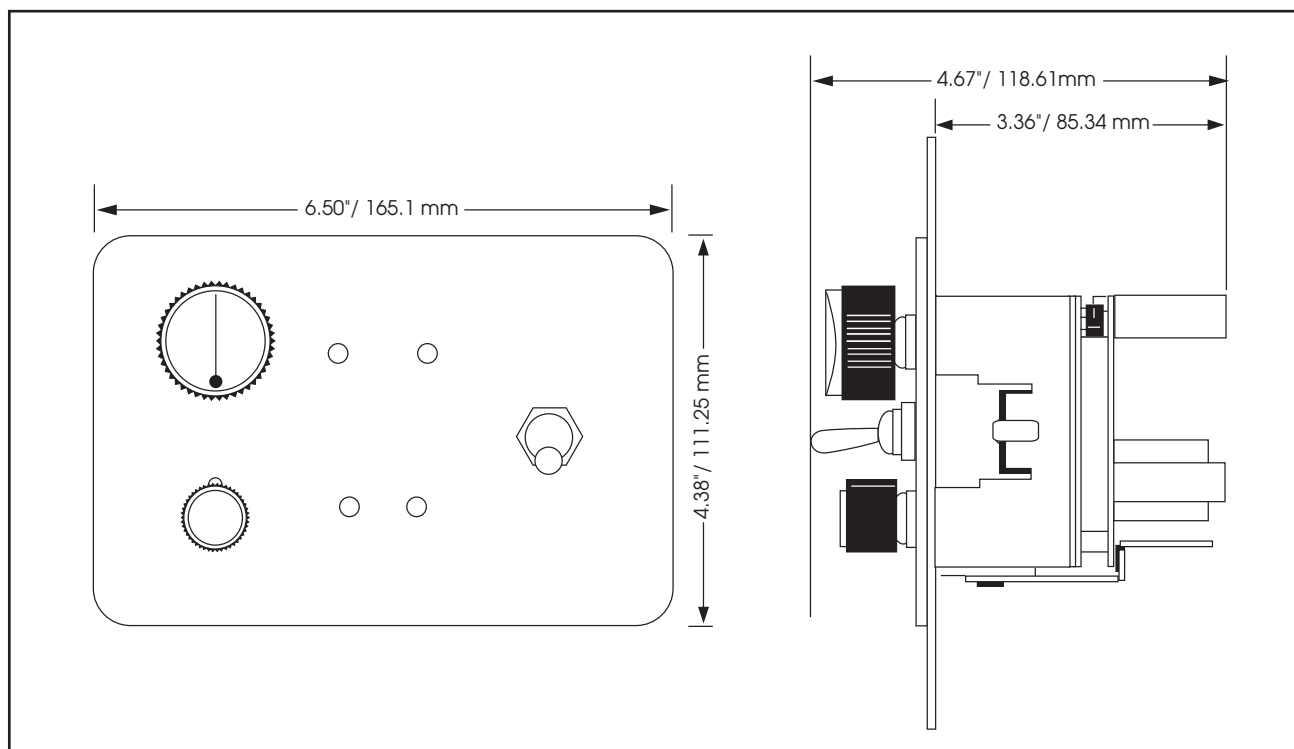

SPECIFICATIONS

Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:	3 lbs	1.36 kg
Shipping Weight:	4 lbs	1.81 kg
Dimensions:		
Height	4.38"	112.25 mm
Width	6.50"	165.1 mm
Depth	4.67"	118.61 mm

HOW TO ORDER

Description/Options	Part Number
12VDC Panel Mount Intercom with Primary Unit Option (C)	AD-26PC
12VDC Panel Mount Intercom with Primary Unit (C) and Remote Power (-1) options	AD-26PC-1
12VDC Panel Mount Intercom with Pre-Amp Equipped (-8) and Remote Volume Control Equipped (-M44) options	AD-26P-8-M44
12VDC Panel Mount Intercom with Secondary Unit Option	AD-26PD
120VAC Panel Mount Intercom	AD-27P
120VAC Panel Mount Intercom with Call Button (A) option	AD-27PA
120VAC Panel Mount Intercom with Primary Unit (C) option	AD-27PC
24VDC Panel Mount Intercom	AD-56P