

39413**AF5 ALLIGATOR KIT #8 PHILLIPS**


UPC: 085937394132

Country of Origin:

UNSPSC: 31162103

USA

Commodity: Wall anchors

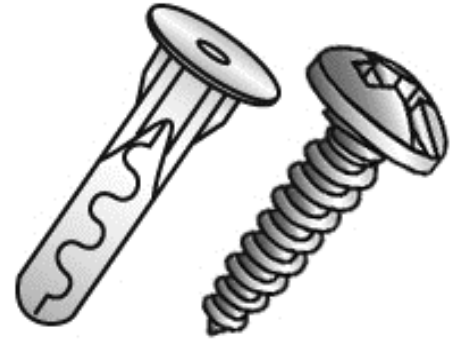

The specially formulated polypropylene body flows into and locks up with any undercuts in the hole, bonding the screw to the wall and sealing the hole to prevent moisture from entering.

Product Attributes

Brand Name	Minerallac Company
Sub Brand	Cully
Type	Hollow Wall Anchor
Special Features	In solid walls (concrete, masonry, brick, etc.) the ALLIGATOR anchor extrudes up to 2x its original length & bonds the screw to wall.
Size	#8-10 (AF5)
Diameter	0.188" IN
Length	1.000" IN
Minimum Embedment Depth	1.500" IN
Drill Size	3/16" IN
Screw Size	#4 — #9
Head Type	Flanged
Material	Polypropylene
Ultimate Tension Pull-Out	With #8 SMS in 1/2" Drywall: 57 LB; in 3500 PSI Concrete: 544 LB. With #10 SMS in 4000 PSI Concrete: 2,316 LB
Ultimate Shear Strength	With #8 SMS in 1/2" Drywall: 125 LB
Kit Includes	50 pc(s) AF5 8-10 Anchor with Flange, 50 pc(s) #8 x 1-1/4" Pan Head Sheet Metal Screw

Item Status: Special

Minerallac Company

Tel: 800-927-3293

Fax: 800-824-8942

www.minerallac.com