




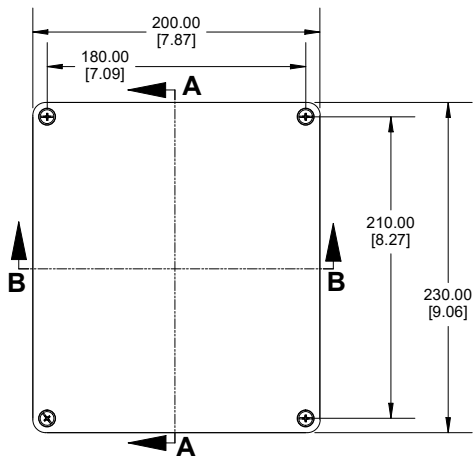


TOP VIEW

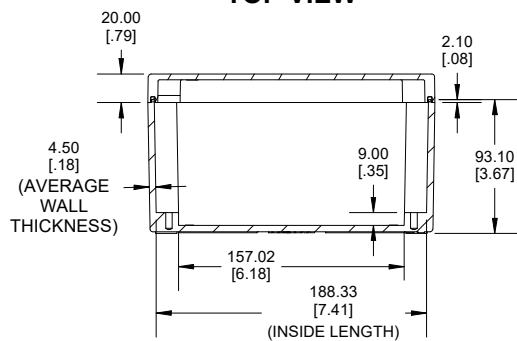


SECTION B-B
SIDE VIEW

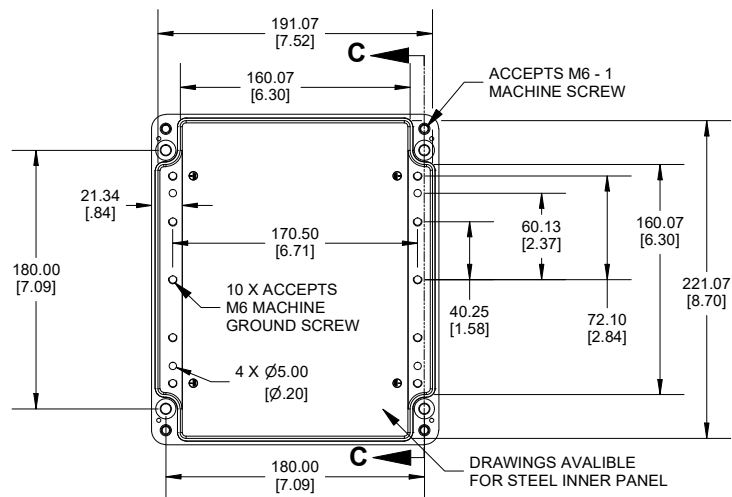


INSIDE BOX

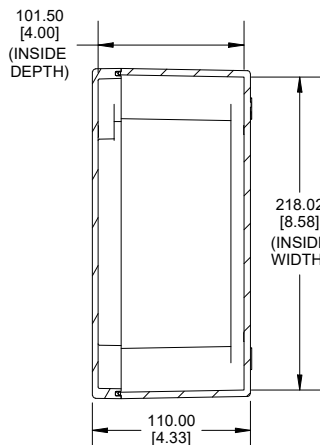


SECTION A-A
END VIEW

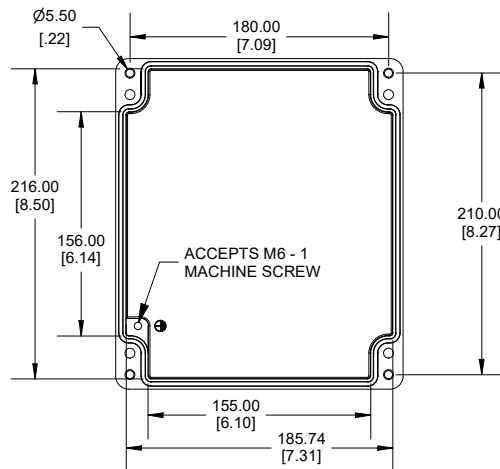

INSIDE LID



SECTION C-C
MOUNTING HOLE

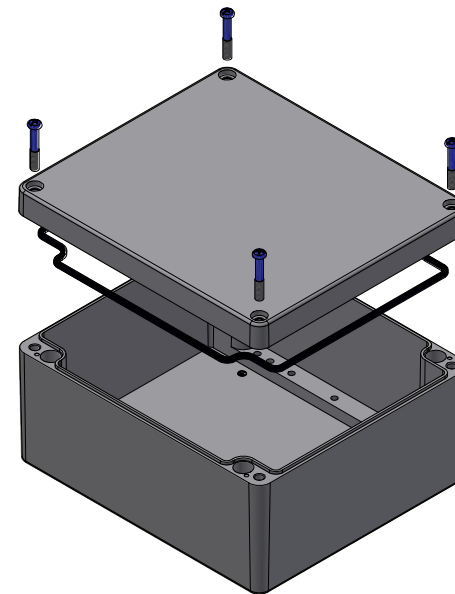

UL US LISTED
FILE #E65324
NEMA 4, 4X, 6, 6P

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, lid, silicone gasket,
4 cover screws and 4 ground screws with washers.
Box and lid are made from Diecast Aluminum Alloy.

Recommended cover screw Torque 15-17 lbf.in (150 -170 cN.m)

1590Z231

1590Z231 Enclosure

Natural Enclosure 1590Z231

Black Enclosure 1590Z231BK

Grey Enclosure - RAL7001 Gloss 1590Z231GY

ACCESSORIES

Steel Inner Panel 1590Z231PL

Pre-Formed Silicone Gasket (2 Pack) 1590Z231G

Copper Ground Hardware (20 Pack)
[M6 - 1.0 X 10mm / M6 Washer] SCGM6-20

Stainless Steel Cover screws (12 pkg)
[M6 - 1.0 x 35mm] SC564-12



HAMMOND®

1590Z231

www.hammondmfg.com

Dimensions:
mm
[inches]