




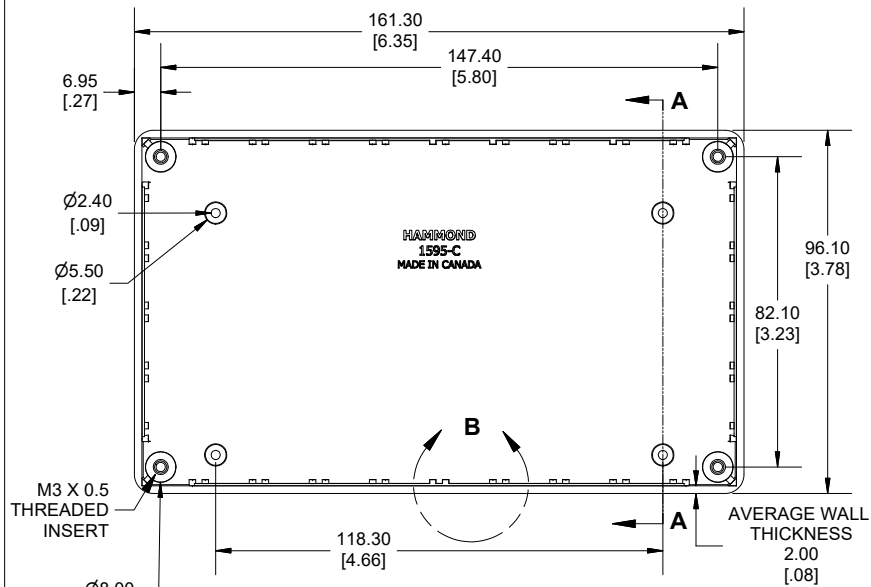


INSIDE ENCLOSURE
MAXIMUM PCB LAYOUT
DRAWINGS ARE AVAILABLE

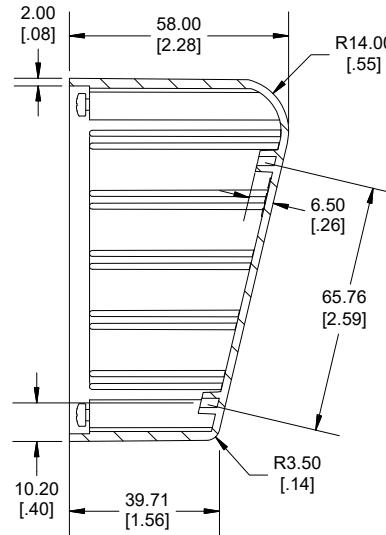


SECTION A-A

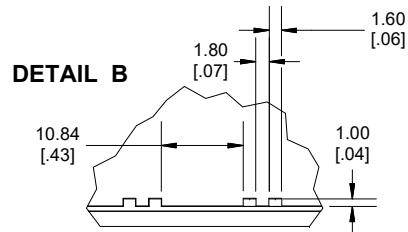

DETAIL B

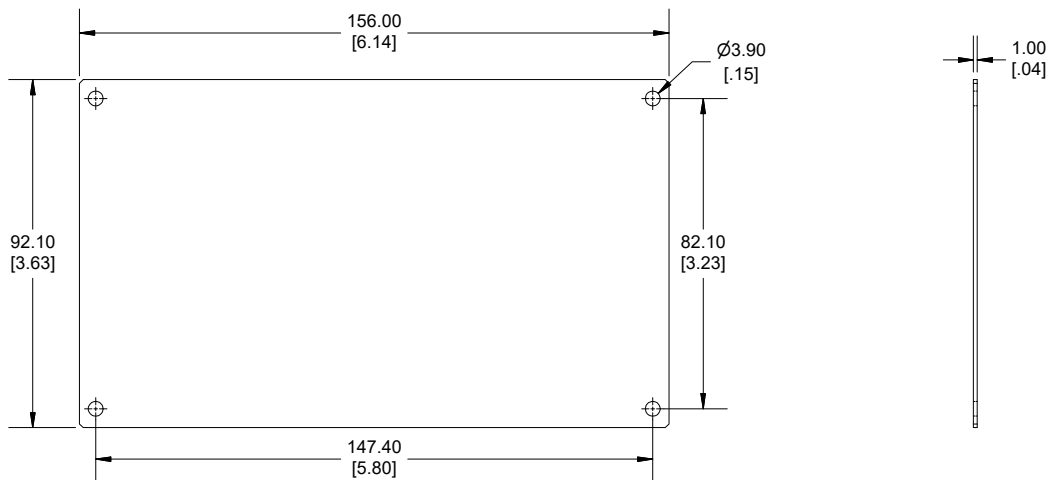

ENCLOSURE LID

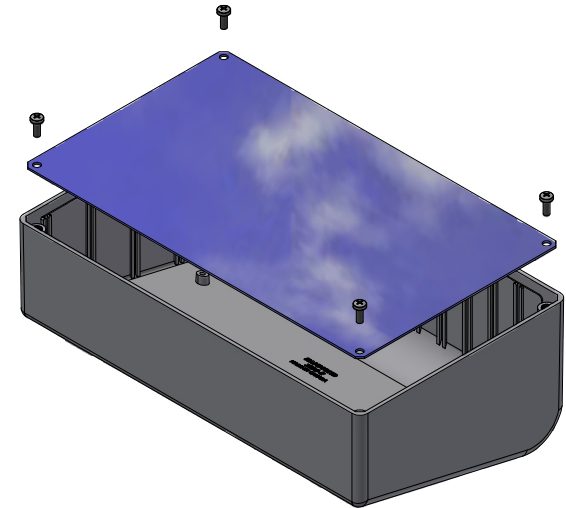

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, Aluminum lid plate, and 4 cover screws.
Enclosure molded from general purpose ABS Plastic.

Recommended Torque for Machine screw : (35-43) Ozf.in / (25-30) cN.m

Recommended Torque for Self-tapping Screw : (43-50) Ozf.in / (30-35) cN.m

1595C

1595C Regular Enclosure

General Purpose ABS Grey

1595CGY

General Purpose ABS Black

1595CBK

ACCESSORIES

Steel Cover Screws

[M3-0.5 x 8mm] (Pkg 100)

1595MS100

P.C. Board Self Tapping Screw

[#4 X 1/4" (6.4mm) Plated] (Pkg 100)

1593ATS100



HAMMOND

1595C

www.hammondmfg.com

Dimensions:
mm
[inches]