


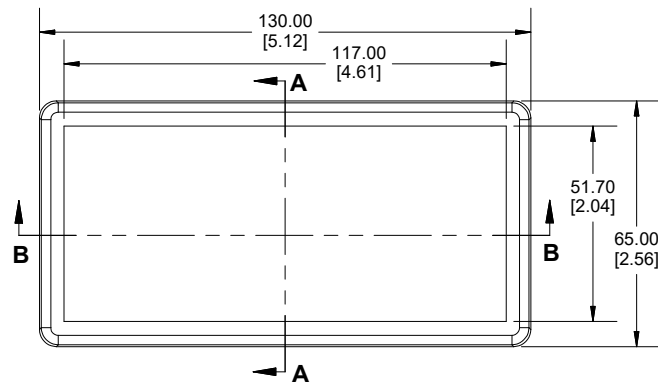
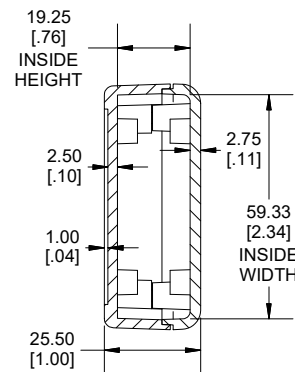


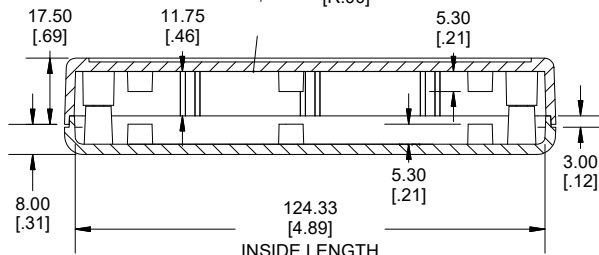


TOP VIEW




END VIEW
SECTION A-A

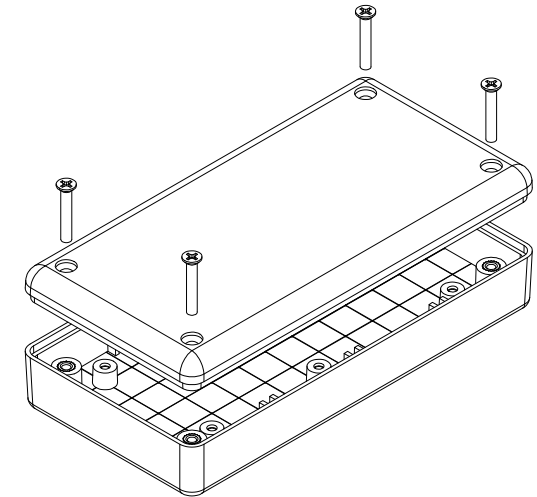


SIDE VIEW
SECTION B-B

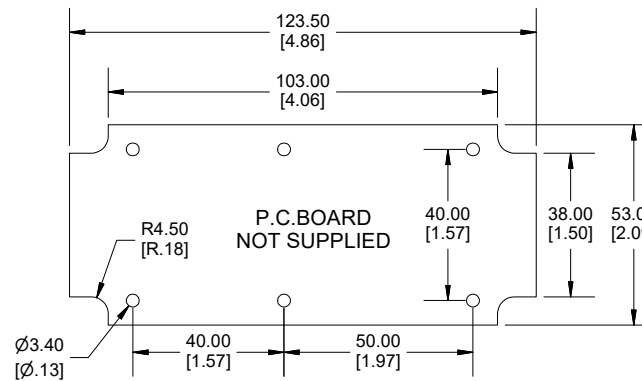

MAXIMUM P.C. BOARD

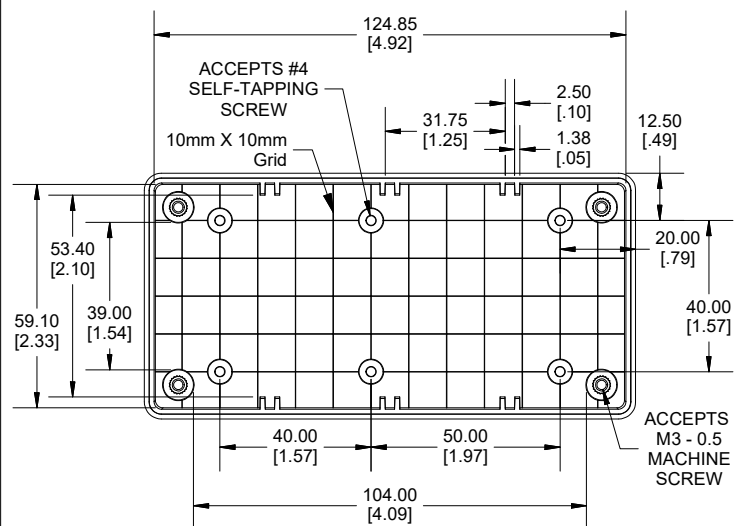

INSIDE BOX

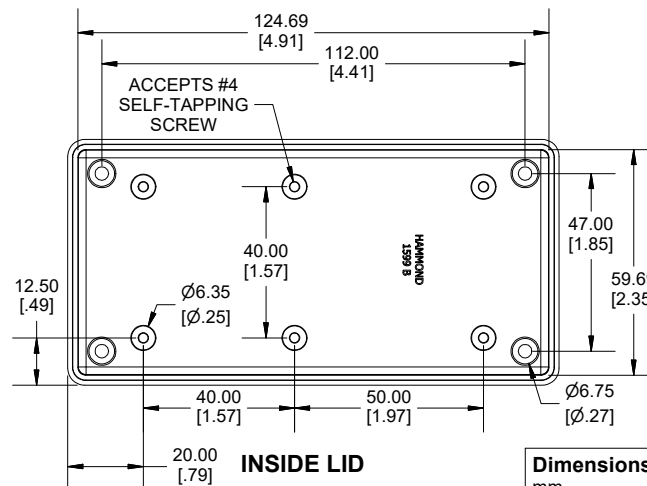

INSIDE LID

Dimensions:
mm
[inches]

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammfg.com) for quotes
Solid models of this enclosure available in .stp or .x_t
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, lid and 4 cover screws. Box and Lid are made from Flame retardant ABS with a UL flammability rating of 94 V-0

Recommended Torque: 42-57 ozf.in (30-40 cN.m)

PART NUMBERS

1599B Fire Retardant ABS

Black FR-ABS

1599BBK

Grey FR-ABS

1599BGY

ACCESSORIES

Cover Screws (Pkg 100)

1594MS100 (Grey)

[M3 - 0.5 x 18mm Machine Screws]

1594MS100BK (Black)

P.C Board Screws (Pkg of 50 or 100)

1593ATS50

[#4 x 1/4" Pan Head Self Tapping Screws]

1593ATS100

Nylon Belt Clip

1599CLIP (Black)

ABS Divider Panel Grey

1599CLIPGY (Grey)

1599BD



HAMMOND®

1599B

www.hammondmfg.com