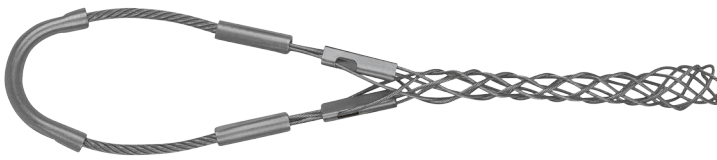

TECHNICAL DATA SHEET - INTERACTIVE PDF

Support grips

Service / Bus-drop grip

T&B® Fittings



Lightweight and easy-to-install service / bus-drop grips are perfect for supporting cables in indoor commercial environments.

Certifications / Standards:



3-Part Specification:
Tools and Calculators

Features:

- Support cables hanging from electrical connections by reducing strain, pulling, and damage
- Single-weave galvanized steel wire mesh contributes to lightweight and flexible design
- Helps aluminum ferrules and saddle prevent abrasion from movement at connection points
- Extended eye design allows for easy installation at conveniently placed connection points

Applications:

- Indoor commercial or manufacturing spaces
- For use with cables experiencing sudden pulls or frequent movement
- Open space environments such as data centers and control rooms (wire-to-rack)
- For use with any jacketed cable or cable bundles
- Supports power, data, or fiber optic cable loads
- Galvanized wire not recommended for outdoor use

Conforms to:

- UL 514B
 - File: E13938
- REACH Article 33(1)
- PFAS
- TSCA
- RoHS (Restriction of Hazardous Substances)
 - European Directive 2011/65 and Commission Delegated Directive 2015/863

Operating temperatures:

- -22°F to +221°F (-30°C to +105°C)

Materials / Finishes:

- Wire mesh: Galvanized steel
- Saddle: Aluminum
- Ferrule: Aluminum
- Coiled wire and folded sleeve: Stainless steel

Table data:

- [Product selection and dimensions](#)

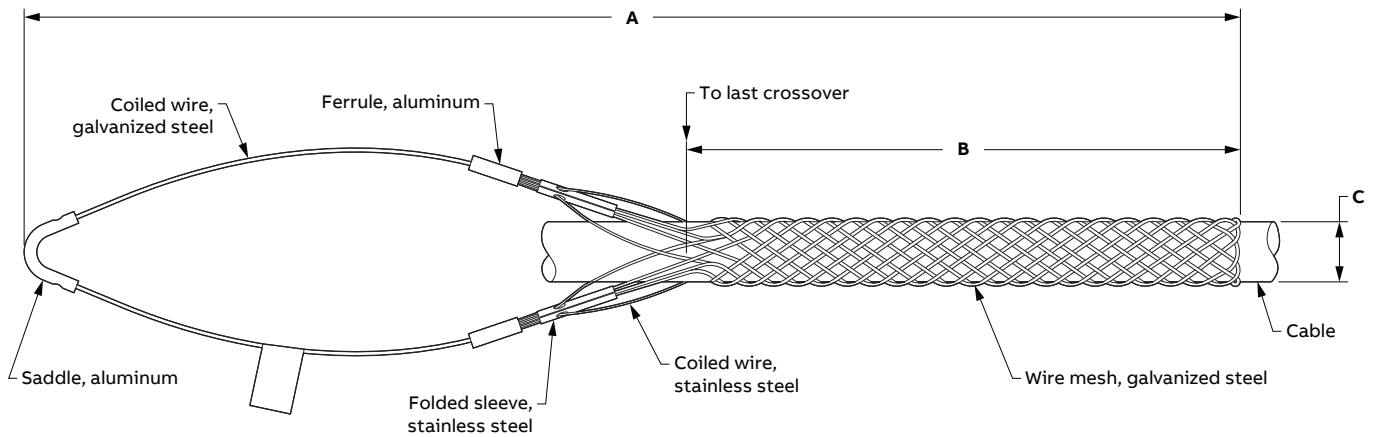
Support grips

Service / Bus-drop grip

Product selection and dimensions

Part no.	Description	Cable diameter range		A		B		C		Approximate break load	
		inches	mm	inches	mm	inches	mm	inches	mm	lbs	Kg
CC6969	Service / Bus-drop grip	0.22 - 0.32	5.59 - 8.13	8.00	203.20	4.00	101.60	0.27	6.86	350	158.76
CC6970		0.30 - 0.43	7.62 - 10.93	8.50	215.90	4.00	101.60	0.37	9.40	550	249.48
CC6971		0.41 - 0.56	10.41 - 14.22	11.00	279.40	5.00	127.00	0.49	12.45	1,000	453.6
CC6972		0.53 - 0.73	13.46 - 18.54	12.00	304.80	6.00	152.40	0.63	16.00	1,400	635.03
CC6973		0.70 - 0.85	17.78 - 21.59	13.00	330.20	6.50	165.10	0.78	19.81	1,500	680.39
CC6974		0.82 - 1.00	20.83 - 25.40	15.50	393.70	8.00	203.20	0.91	23.11	1,400	635.03
CC6975		0.96 - 1.25	24.38 - 31.75	17.50	444.50	8.50	215.90	1.11	28.19	1,500	680.39
CC7684		0.22 - 0.32	5.59 - 8.13	14.00	355.60	5.50	139.70	0.27	6.86	1,100	498.95
CC7685		0.30 - 0.43	7.62 - 10.93	14.00	355.60	5.50	139.70	0.37	9.40	1,100	498.95
CC7686		0.41 - 0.56	10.41 - 14.22	14.50	368.30	6.00	152.40	0.49	12.45	1,100	498.95
CC7687		0.53 - 0.73	13.46 - 18.54	14.50	368.30	6.00	152.40	0.63	16.00	1,100	498.95
CC7688		0.70 - 0.85	17.78 - 21.59	17.00	431.80	8.00	203.20	0.78	19.81	1,900	861.83
CC7689		0.82 - 1.00	20.83 - 25.40	17.00	431.80	8.00	203.20	0.91	23.11	1,900	861.83
CC7690		0.96 - 1.25	24.38 - 31.75	18.00	457.20	9.50	241.30	1.11	28.19	1,900	861.83

Note: Product must be installed in accordance with applicable national and local electrical codes.



electrification.us.abb.com (US/LATAM)
tnb.ca.abb.com (Canada)
abb.com

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB. © 2026 ABB Installation Products Inc. and/or its related companies. All Rights Reserved.

Product search 

