

---

TECHNICAL DATA SHEET - INTERACTIVE PDF

# Support grips

## Non-metallic cable grip

**T&B® Fittings**



Non-metallic cable support grips, made from a high-strength aramid fiber, to support cables or flexible conduit in corrosive environments.

**Certifications / Standards:**



**3-Part Specification:**  
[Tools and Calculators](#)

---

**Features:**

- Non-metallic and corrosion-resistant alternative to steel
- Lightweight aramid fiber provides impressive weight-to-break ratio
- Continuous weave and 45° pitch contribute to cable holding strength
- Flexible aramid material allows for easy installation
- Protects power cables from vibration and damage
- Available in several ranges to fit common power cable sizes

---

**Applications:**

- Suitable for indoor and outdoor environments
- Supports any cable or flexible conduit
- For use with jacketed or armored power cables
- Non-metallic material allows for long-lasting use in wastewater or saltwater applications
- Suitable for permanent installations

---

**Conforms to:**

- REACH Article 33(1)
- RoHS (Restriction of Hazardous Substances)
  - European Directive 2011/65 and Commission Delegated Directive 2015/863

---

**Operating temperatures:**

- -22°F to +221°F (-30°C to +105°C)

---

**Materials / Finishes:**

- Cable grip: Aramid fiber
- Eye & neck: PVC
- Heat-shrink: Polyolefin

---


**Table data:**

- [Product selection and dimensions](#)

Support grips  
Non-metallic cable grip

| Product selection and dimensions |                         |                      |               |        |        |        |        |                        |          |
|----------------------------------|-------------------------|----------------------|---------------|--------|--------|--------|--------|------------------------|----------|
| Part no.                         | Description             | Cable diameter range |               | A      |        | B      |        | Approximate break load |          |
|                                  |                         | inches               | mm            | inches | mm     | inches | mm     | lbs                    | Kg       |
| CCWW2810                         | Non-metallic cable grip | 0.38 - 0.75          | 9.65 - 19.05  | 20.70  | 525.78 | 27.40  | 695.96 | 2,460                  | 1,115.84 |
| CCWW2811                         |                         | 0.75 - 1.25          | 19.05 - 31.75 | 20.60  | 523.24 | 29.10  | 739.14 | 3,580                  | 1,623.86 |
| CCWW2812                         |                         | 1.25 - 1.50          | 31.75 - 38.10 | 25.30  | 642.62 | 34.30  | 871.22 | 4,920                  | 2,231.67 |
| CCWW2813                         |                         | 1.50 - 2.00          | 38.10 - 50.8  | 20.60  | 523.24 | 29.30  | 744.22 | 5,820                  | 2,639.91 |

Note: Product must be installed in accordance with applicable national and local electrical codes.

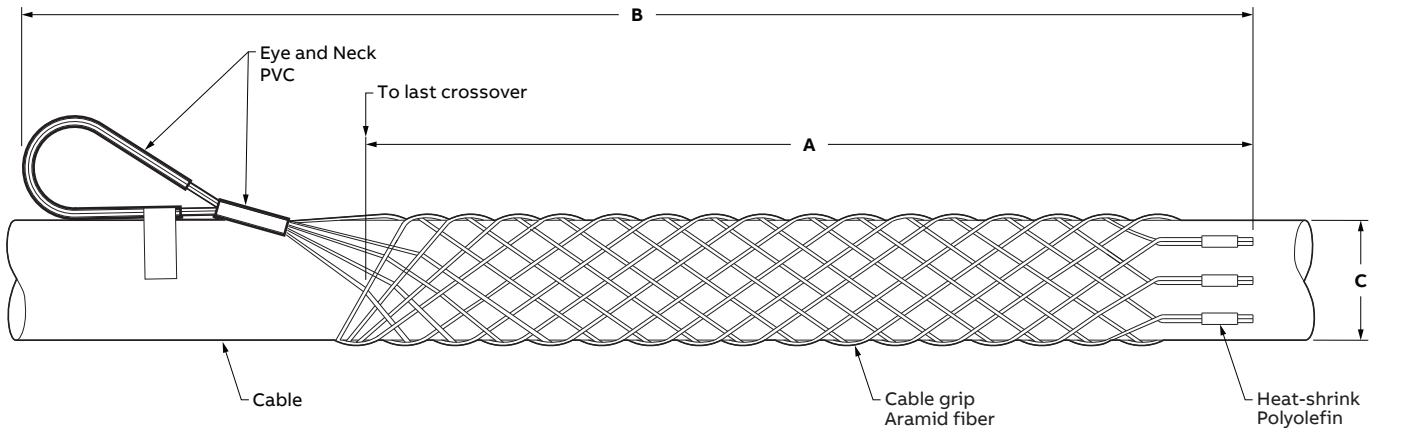

[electrification.us.abb.com](http://electrification.us.abb.com) (US/LATAM)  
[tnb.ca.abb.com](http://tnb.ca.abb.com) (Canada)  
[abb.com](http://abb.com)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction – in whole or in part – is forbidden without prior written consent of ABB. © 2026 ABB Installation Products Inc. and/or its related companies. All Rights Reserved.

Product search 



