
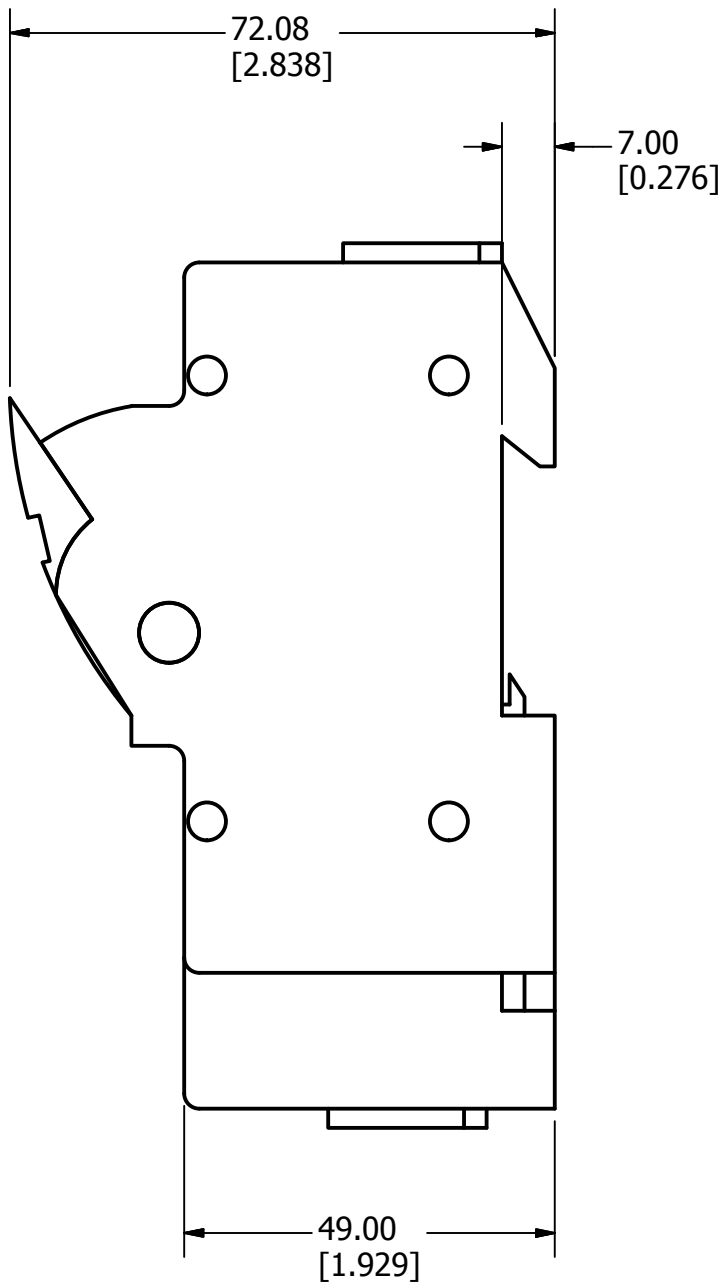
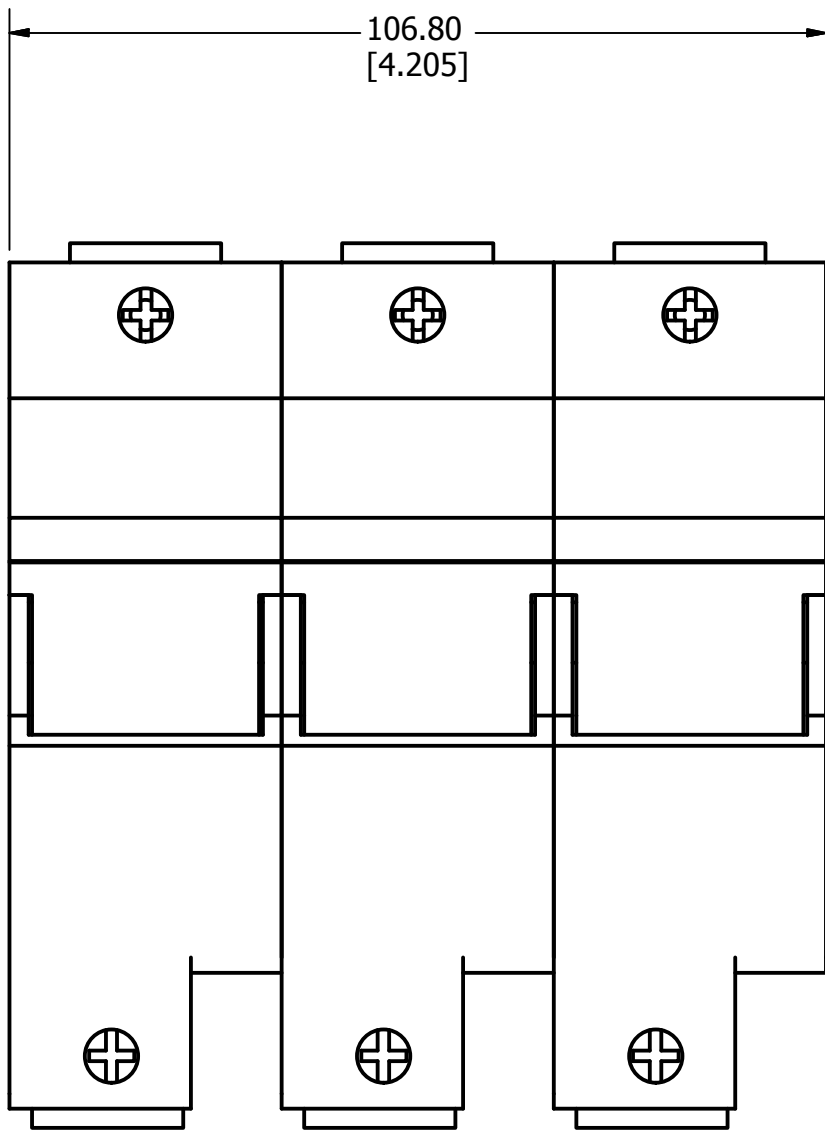
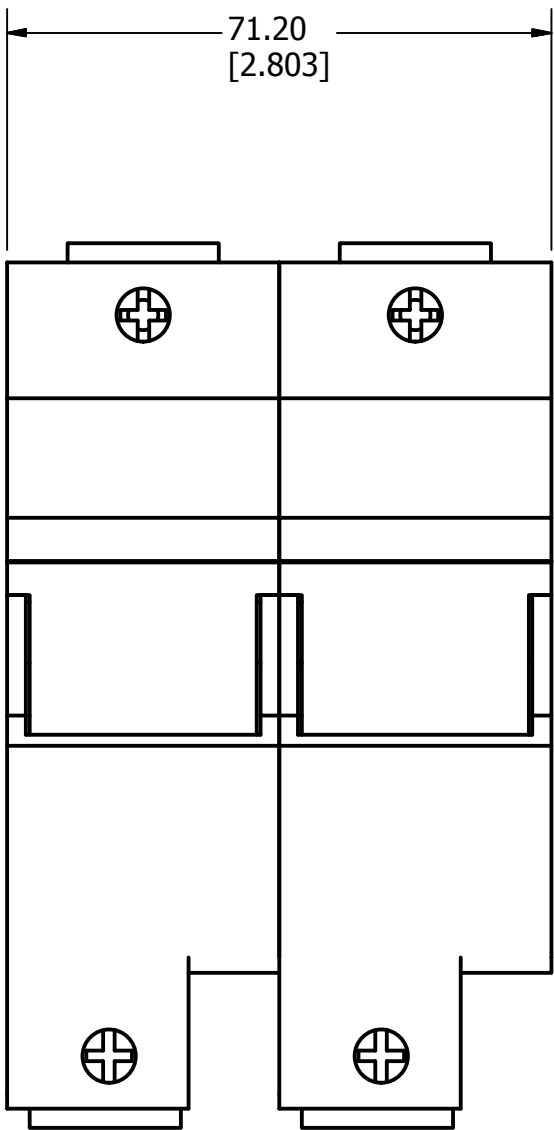


REVISION		
REV	DATE	DESCRIPTION
A	5/19/2014	510464ECP - RELEASE MRY
B	5/11/2015	514236ECP/D- UPDATE WIRE RANGE & TORQUE MRY
C	6/21/17	517326ECP/D - CHG WIDTH DIMENSIONS MRY

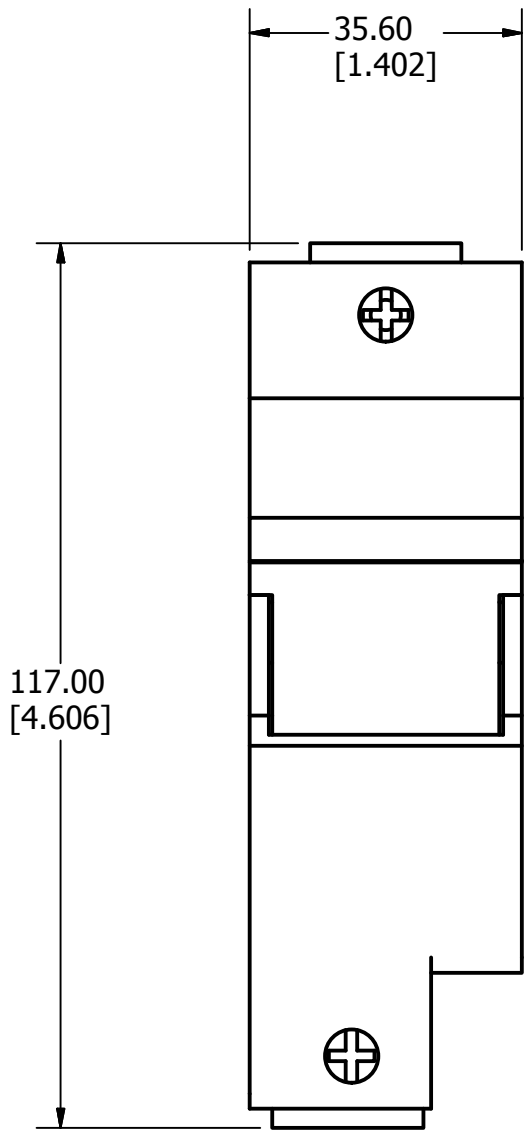

SPECIFICATIONS:

VOLTAGE RATING: 600V

AMPERE RATING: 30 AMPERES

INTERRUPT RATING: 200kA

WIRE RANGE: 0,75-50mm2
#18-1 AWG
Cu ONLY

SUGGESTED TORQUE: 0,75-1mm2 2.5Nm
1,5-50mm2 4Nm
#18-1 AWG 31-35 lb-in

APPROVALS: UL LISTED (FILE NO. E14721)
CSA CERTIFIED (FILE NO. 256018)

●	DENOTES CRITICAL CHARACTERISTICS.		
CPK	DENOTES CPK DIMENSIONS, -MINIMUM CPK VALUE		
(ST)	DENOTES A CHARACTERISTIC THAT PROVIDES AN INDICATION OF PROCESS PERFORMANCE. PROCEDURE FOR MEASUREMENT AND TRACKING TO BE DEFINED IN LITTELFUSE INSPECTION INSTRUCTIONS.		
CP	DENOTES CP DIMENSIONS, -MINIMUM CP VALUE MUST BE WITHIN THE DIMENSIONAL LIMITATIONS SHOWN ON DRAWING AND INITIALLY LOCATED TO ALLOW FOR MAXIMUM TOOL LIFE.		C
MATL SPEC		FINISH	
DRW MYORK	DATE 5/7/2014	SCALE NTS	FINISH GOOD WT GRAMS/PIECE
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN BRACKETS [] ARE INCHES DIMENSIONING AND DO NOT INCLUDE PLATING. TOLERANCING TO BE INTERPRETED IN ACCORDANCE WITH ANSI Y14.5M-1994			
3RD ANGLE PROJECTION			
			
TITLE LFPSJ 30A SERIES OUTLINE			
 Littelfuse® CHICAGO, ILLINOIS 60631		REVISION C	DRWG NO. OL-LFPSJ300
		SHEET 1 OF 1 SERIES	