

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS in. [mm]				
		L ± .08 [2,0]	W ± .01 [0,3]	C ± .015 [0,4]	M ± .06 [1,5]	H ± .01 [0,3]
PV12-8HDR	#8	1.05 [26,7]	.31 [7,9]	.35 [8,9]	.89 [22,6]	.17 [4,3]
PV12-10HDR	#10	1.08 [27,4]	.37 [9,4]	.33 [8,4]	.89 [22,6]	.20 [5,1]
PV12-14HDR	1/4"	1.23 [31,2]	.52 [13,2]	.42 [10,7]	.97 [24,6]	.27 [6,9]

NOTES:

1. USED FOR:

- A. #16-12 AWG [2,0-6,0 mm²] STRANDED COPPER WIRE
 B. 221°F [105°C] MAX. OPERATING TEMPERATURE
 C. 600 V. MAX. VOLTAGE RATING

2. WIRE STRIP LENGTH: 9/32" ^{+1/32}₋₀ [7,1^{+0,8}₀]

3. MATERIAL:


- A. STAMPING: .05" [1,3] THK COPPER, TIN PLATED
 B. HOUSING: VINYL, YELLOW

4. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

UL & CSA TOOLS (DIES)

CT-1550
 CT-1551
 CT-2500 (CT-2550CH)

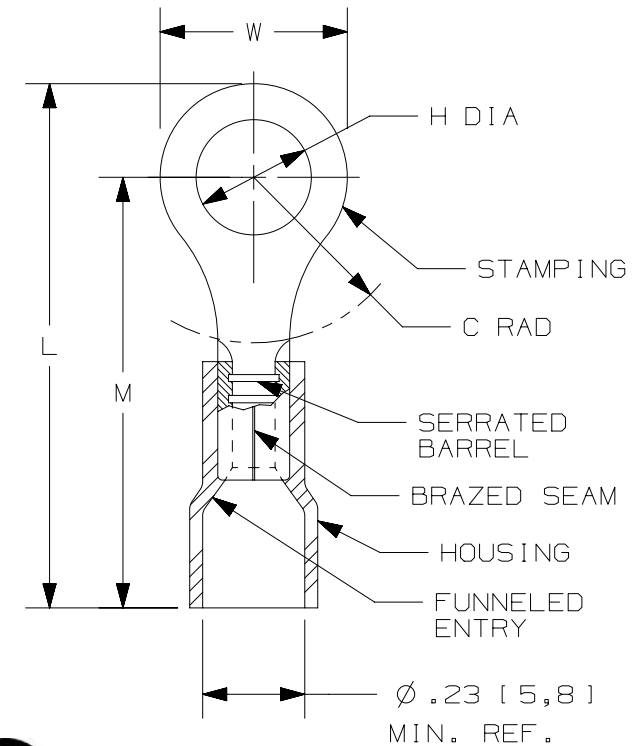

LISTED
 587H
 E52164



CERTIFIED
 LR31212

						PART NUMBER		SEE TABLE	
						TITLE		RING TERMINALS, VINYL INSULATED, HEAVY DUTY #16-12	
						CUSTOMER DRAWING			
						ITEM REVISION NAME		N41281BA/05	
						DATASET FILE NAME		N41281BA_DC/05A	
						THIRD ANGLE PROJECTION			
						MATERIAL		SEE NOTES	
						DRAWING NUMBER		A41281	
						DRAWN BY		DAW	
						DATE		-	
						CHK		-	
						SCALE		N.T.S.	
						SHEET 1 OF 1		A	