

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS - in. [mm]				
		A ± .02 [0,5]	W ± .01 [0,3]	C ± .02 [0,5]	M ± .02 [0,5]	H ± .01 [0,3]
P18-6LF	#6	.68 [17,3]	.27 [6,9]	.22 [5,6]	.48 [12,2]	.15 [3,8]
P18-8LF	#8	.74 [18,8]	.29 [7,4]	.23 [5,8]	.53 [13,5]	.16 [4,1]

NOTES:


- UL LISTED & CSA CERTIFIED FOR:
 - #22-16 AWG SOLID OR STRANDED COPPER WIRE
 - 302°F [150°C] MAX TEMP RATING
 - 2000 VOLTS MAX
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- MATERIAL:
 - STAMPING - .032" [0,8] THK COPPER, TIN PLATED
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
- WIRE STRIP LENGTH: $9/32" \begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,1mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]

UL & CSA TOOLS

CT-100
CT-200
CT-1570
CT-2300 (CT-2570CH)
CT-2500 (CT-2570CH)

PANDUIT APPROVED TOOLS

CT-260

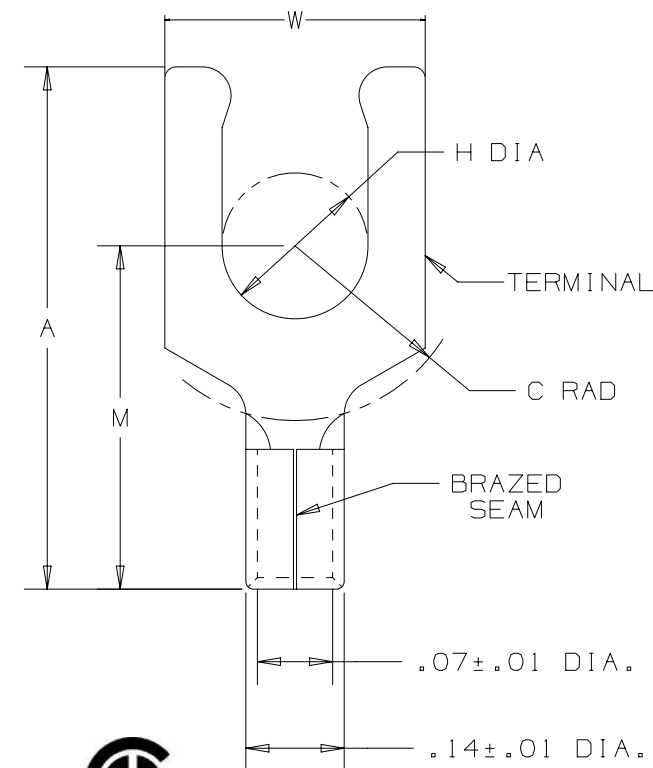

PART NUMBER		SEE TABLE	
TITLE		#22-16 BARREL NON-INSULATED LOCKING FORK	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41059BA/10	
MATERIAL		SEE NOTE 3	
DRAWING NUMBER		A41059	
DRAWN BY		DRL	
DATE		LA	
CHK		NONE	
SCALE		SHEET 1 OF 1	
SIZE		A	

10A	06-16-26	ANVM	ANVM	JSUN	UPDATED TOOL LIST. REMOVED OBSOLETE P18-6LFW,PN18-10LF,P18-10LFN.	033696/00
09	5/17	JHNU	TMR	RGB	ADDED CSA BACK TO DWG, UPDATED TOOL CHART FORMAT.	N41059-A41059
08	06/14	MBY	JHNU	RGB	REVISED CERTIFICATIONS, REVISED NOTES, MOVED TOOLS TO TABLE, UPDATED BORDER	N41059-A41059
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN