


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE	DIMENSIONS mm					TOOLS
		A ± 2.5	W ± 0.25	C ± 0.38	M ± 0.51	H ± 0.25	
PMV2-3FB	M3	21.34 (.84)	5.84 (.23)	4.83 (.19)	17.78 (.70)	3.30 (.13)	CT-100 CT-1550 CT-1551 CT-2300 CT-2500 (CT-2550CH)

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- DIMENSIONS IN [] ARE IN INCHES.
- USED FOR:
 - 600V MAX. VOLTAGE RATING
 - 105 C (221 °F) MAX. TEMP. RATING.
 - 1.5-2.5mm² (#16-14 AWG), STRANDED COPPER WIRE.
- MATERIAL:
 - STAMPING - 0.81mm (.03) THK COPPER, TIN PLATED.
 - HOUSING - BLUE VINYL.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
- PACKAGE QTY:
 - STD: C=100
- WIRE STRIP LENGTH:

7.9	+0.8	[5/16	+1/32	]
	-0		-0	

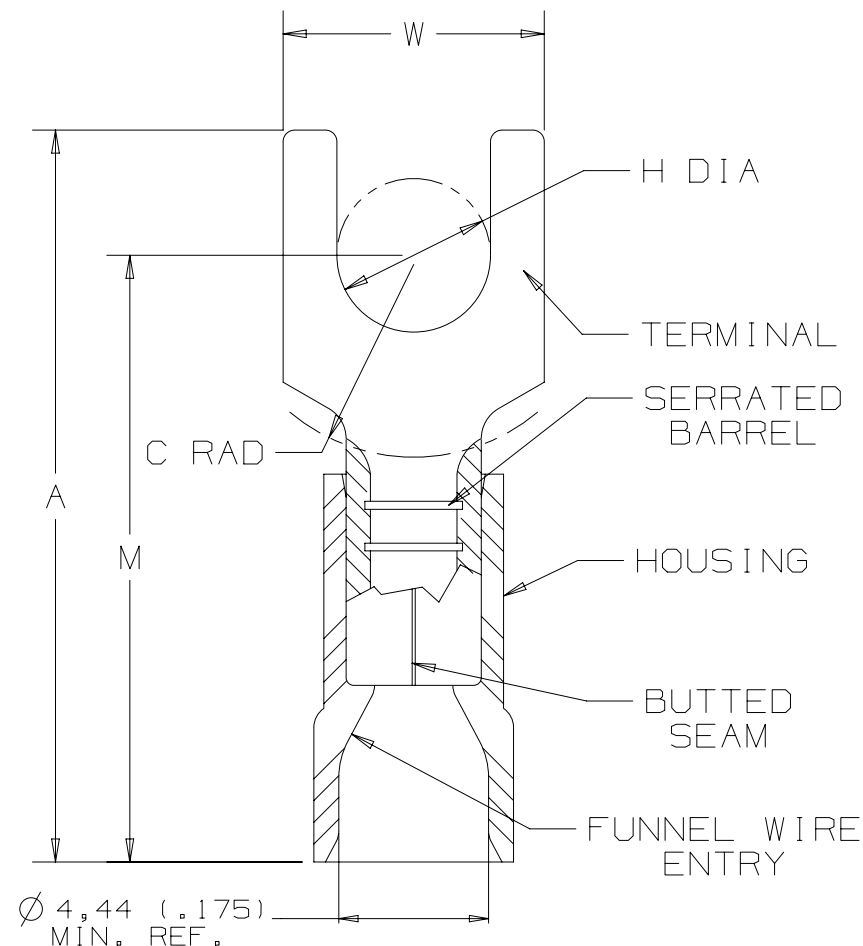

PART NUMBER		PMV2-3FB	
TITLE		2PC. VINYL INSULATED METRIC FORKS 1.5-2.5 mm ² BARREL	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		N41425BA/02	
MATERIAL		SEE NOTE 4	
DRAWING NUMBER		A41425	
DRAWN BY		BDK	
DATE		-	
CHK		ENG	
SCALE		NONE	
SHEET 1 OF 1		A	